
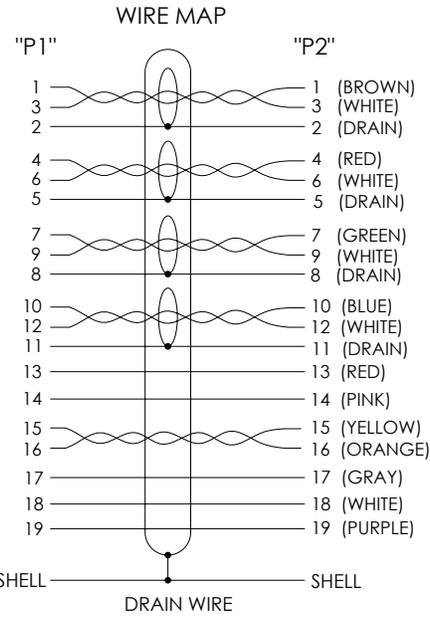



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILESTEK, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF MILESTEK, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/16/2020	MBLACKWOOD

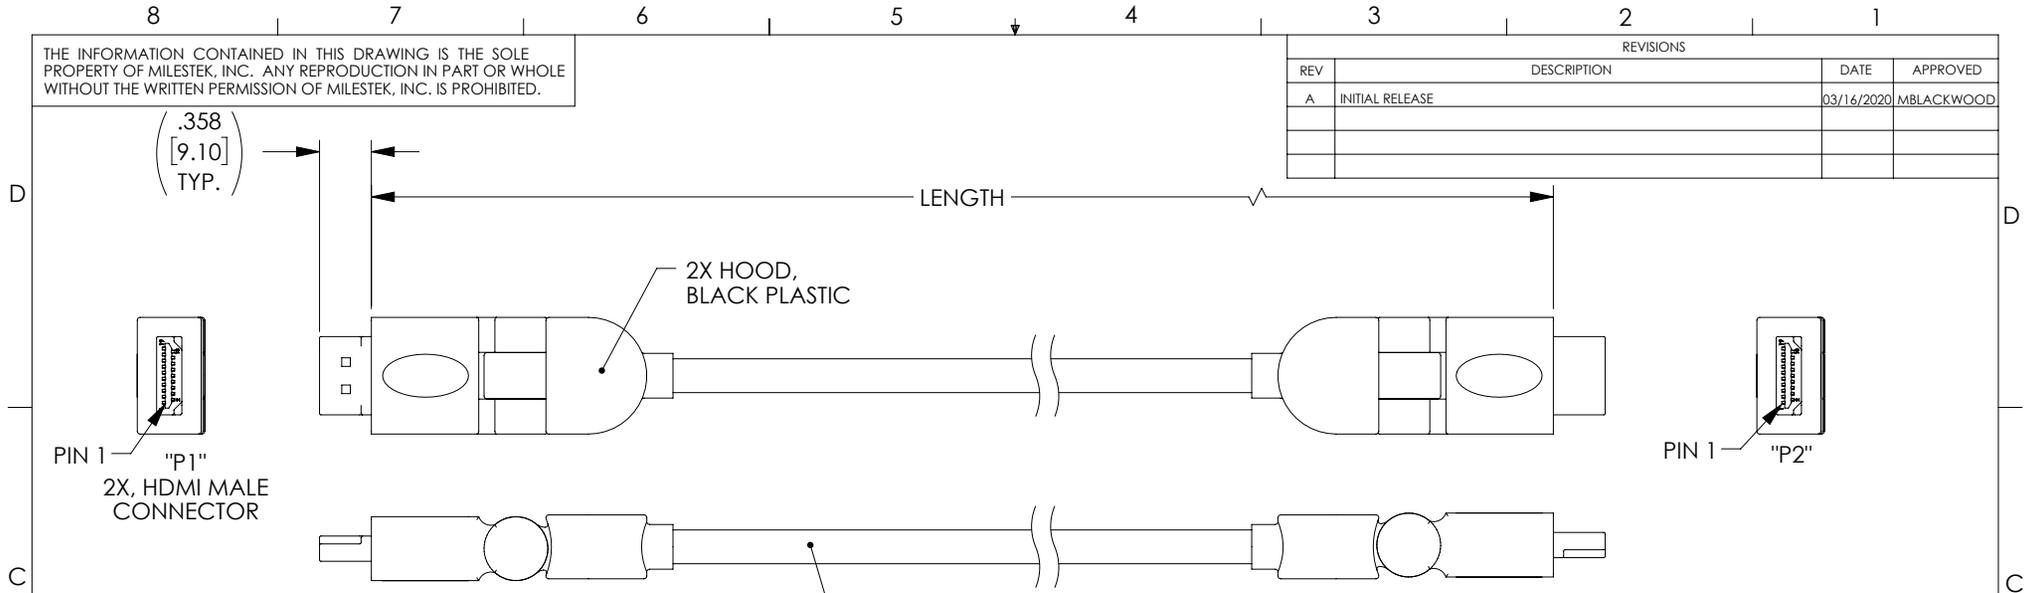

UL20276
 (4) 30AWG INDIVIDUALLY SHIELDED TWISTED PAIRS,
 (1) 30AWG UNSHIELDED TWISTED PAIR,
 (5) 30AWG INDIVIDUAL CONDUCTORS,
 OVERALL SHIELD: ALUMINUM MYLAR FOIL SHIELD PLUS
 COPPER BRAID SHIELD WITH DRAIN WIRE,
 OUTER JACKET: PVC, BLACK

PART NUMBER	LENGTH	
	MM	INCHES
MMIA00015-01M	1000 +51/-0	39.37 +2.0/-0
MMIA00015-02M	2000 +102/-0	78.74 +4.0/-0
MMIA00015-03M	3000 +102/-0	118.11 +4.0/-0
MMIA00015-04M	4000 +152/-0	157.48 +6.0/-0

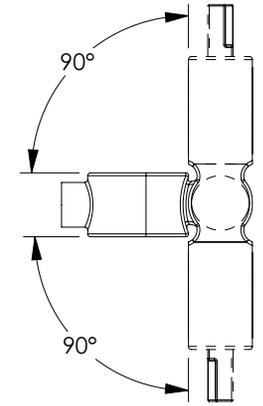

NOTES:

ELECTRICAL:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- VOLTAGE TEST: DC 300V 10MS
- INSULATION RESISTANCE: 5.0M OHM/MIN.
- CONDUCTOR RESISTANCE: 5.0 OHM/MAX.

PACKAGING:

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION LSP-010.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 an INFINIT® brand	301 Leora Ln., Suite 100, Lewisville, TX 75056 Phone: 1.940.484.9400 1.866.524.1553	
	DRAWN BY MVEERAPPAN	03/16/2020			CATEGORY
	CHECKED BY JLABOY	03/16/2020			VIDEO
	APPROVED BY DFRISIELLO	03/16/2020			PRODUCT DESCRIPTION
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SWIVEL CONNECTOR END CABLES HDMI		SCALE: NONE CAD FILE: MMIA00015.SLDDRW SHEET 1 OF 1	
	COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 4Z977 ITEM NO. MMIA00015 REV. A			