


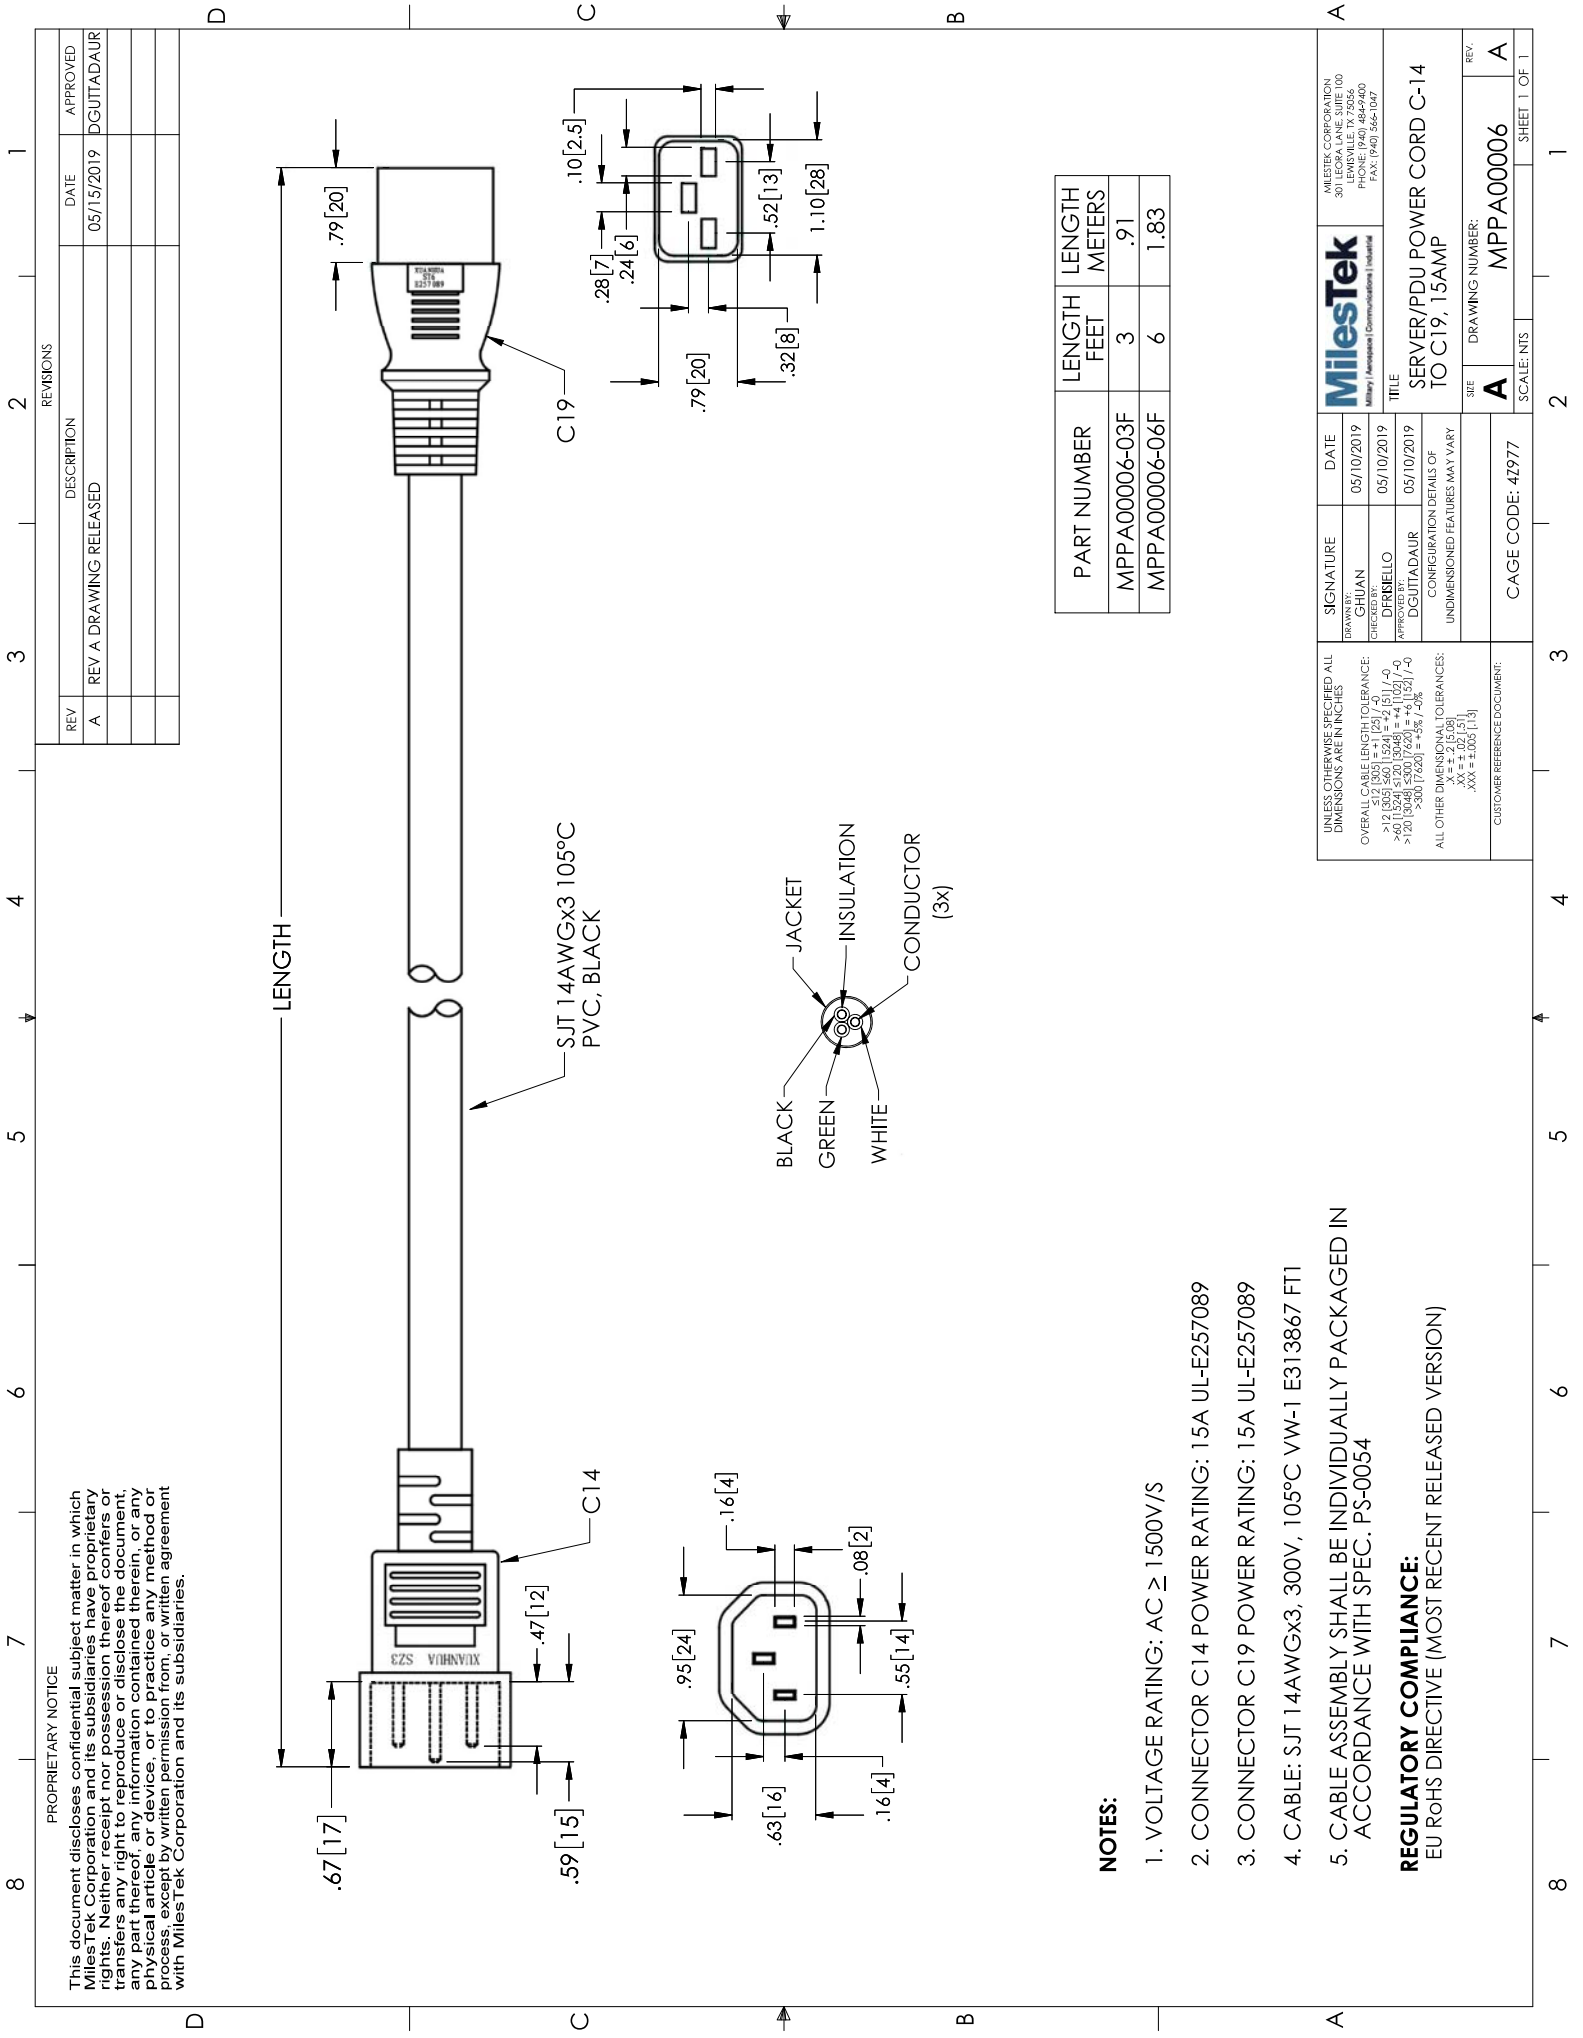

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/2019	DGUITADAUR

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MiletTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right in the product or information contained therein, and no part thereof or information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MiletTek Corporation and its subsidiaries.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤ 19' [505] = +1' [25] / -0'
> 19' [505] ≤ 100' [2540] = ±1' [25] / -0'
> 100' [2540] ≤ 500' [12700] = ±1' [25] / -0'
> 500' [12700] ≤ 1000' [25400] = ±1' [25] / -0'
ALL OTHER DIMENSIONAL TOLERANCES:
XX = ±.01 [0.25]
XXX = ±.005 [0.13]

PART NUMBER	LENGTH FEET	LENGTH METERS
MPPA00006-03F	3	.91
MPPA00006-06F	6	1.83

NOTES:

- VOLTAGE RATING: AC ≥ 1500V/S
- CONNECTOR C14 POWER RATING: 15A UL-E257089
- CONNECTOR C19 POWER RATING: 15A UL-E257089
- CABLE: SJT 14AWGx3, 300V, 105°C VW-1 E313867 FTI
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

MilesTek		MILESTEK CORPORATION	
SERIES 1 Americas Communications Industrial		301 EMMETT AVE. SUITE 100	
TITLE		PHONE: (940) 484-9400	
SERVER/PDU POWER CORD C-14 TO C19, 15AMP		FAX: (940) 564-1047	
DATE		05/10/2019	
SIGNATURE		CHUAN	
DRAWN BY:		DRIEDELLO	
CHECKED BY:		DGUITADAUR	
APPROVED BY:		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
CAGE CODE: 4Z977		DRAWING NUMBER: MPPA00006	
CUSTOMER REFERENCE DOCUMENT:		REV. A	
SCALE: NTS		SHEET 1 OF 1	