PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/2019	DGUTTADAUR

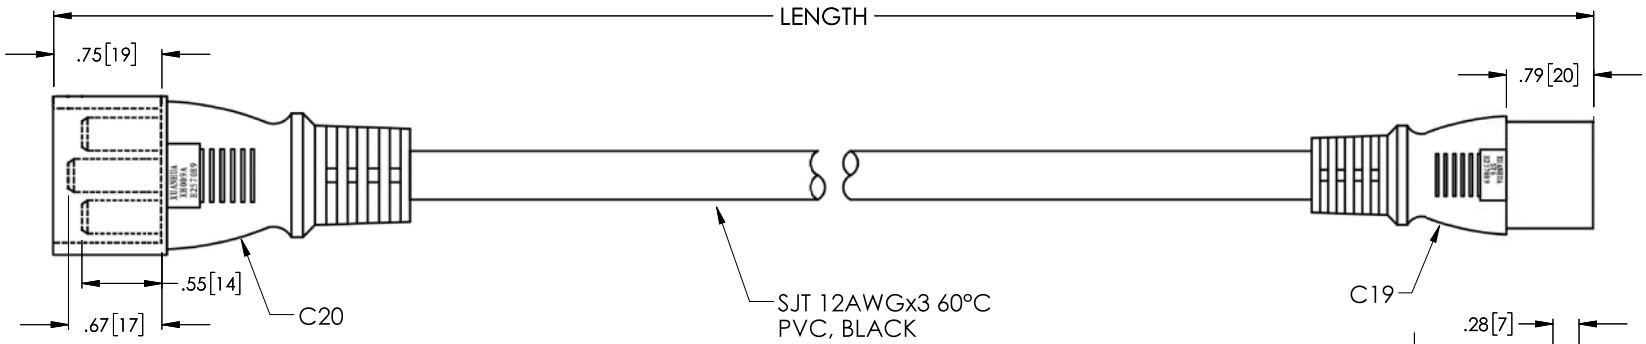

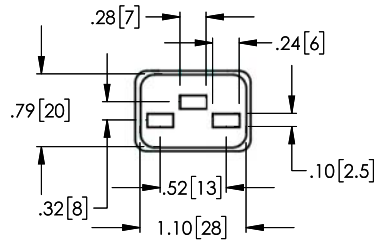

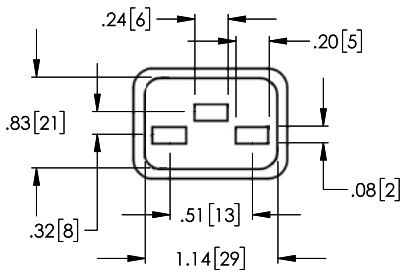

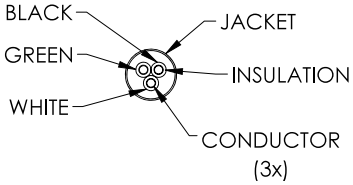

PART NUMBER	LENGTH FEET	LENGTH METERS
MPPA00008-01F	1	.30
MPPA00008-02F	2	.61
MPPA00008-03F	3	.91
MPPA00008-06F	6	1.83
MPPA00008-08F	8	2.44
MPPA00008-10F	10	3.05
MPPA00008-15F	15	4.57
MPPA00008-25F	25	7.62

NOTES:

1. VOLTAGE RATING: AC ≥ 1500V/S
2. CONNECTOR C19 POWER RATING: 20A UL-E257089
3. CONNECTOR C20 POWER RATING: 20A UL-E257089
4. CABLE: SJT 12AWGx3, 300V, 60°C VW-1 E313667 FT1
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

CUSTOMER REFERENCE DOCUMENT:

	SIGNATURE	DATE
DRAWN BY:	GHUAN	05/10/2019
CHECKED BY:	DFRISIELLO	05/10/2019
APPROVED BY:	DGUTTADAUR	05/10/2019

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

CAGE CODE: 4Z977

MilesTek
Military | Aerospace | Communications | Industrial

MILESTEK CORPORATION
301 LEORA LANE, SUITE 100
LEWISVILLE, TX 75056
PHONE: (940) 484-9400
FAX: (940) 566-1047

TITLE
SERVER/PDU POWER CORD C-20 TO C19, 20AMP

SIZE: A
DRAWING NUMBER: MPPA00008
REV. A
SCALE: NTS
SHEET 1 OF 1