

PROPRIETARY NOTICE


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

MSA00174-XXXN

A


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/30/17	J.YOU
B	ECN 8899: REVISE NOTE 1 TO NOTE 2, DESCR., TITLE, ADD DETAIL	9/12/17	D.FRISIELLO

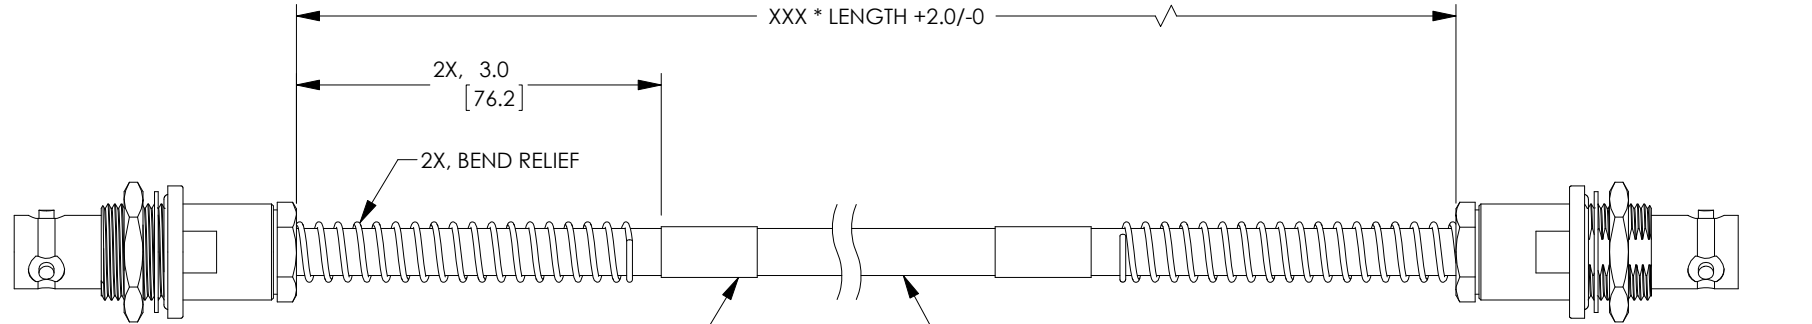

LABEL INFORMATION

MSA00174-XXXN
4Z977
DATE CODE
(SEE NOTE 2)



WIRING MAP

LENGTH CODE CHART

CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00174-XXXN	WHERE XXX = LENGTH IN INCHES	MSA00174-12N (12.0 INCHES)

$$\begin{matrix} .220^{+.001} \\ -.002 \\ [5.58^{+0.03} \\ -0.04] \end{matrix}$$

$$\phi .507 \pm .002 [12.89 \pm 0.06]$$

RECOMMENDED PANEL CUTOUT

NON CONTROLLED DRAWING IF PRINTED

NOTES:

- *XXX = LENGTH IN INCHES
- CABLES 48" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 48" HAVE 2 LABELS, ONE AT EACH END 3.0" FROM THE BACK OF THE CONNECTOR.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	<p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: J.YOU	06/30/17		
			CHECKED BY: M.HEARN	06/30/17	<p>TITLE</p> <p>PLN TWNX NI BHBR J-J</p>	
			APPROVED ENGINEERING: M.HEARN	06/30/17		
			APPROVED MANUFACTURING:		<p>SIZE</p> <p>DRAWING NUMBER: MSA00174-XXXN</p>	
			CUSTOMER APPROVAL			
			CAGE CODE: 4Z977		SCALE: NTS	SHEET 1 OF 1
DASH	NEXT ASSY	USED ON	APPLICATION			

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
X = ±.2 [5.08]
XX = ±.02 [5.1]
XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: