


**PROPRIETARY NOTICE**  
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/17	G.HUAN
B	ECN 8899: REVISE DESCRIPTION, TITLE, ADD DETAIL, DEL NOTE 2	8/29/17	D.FRISIELLO


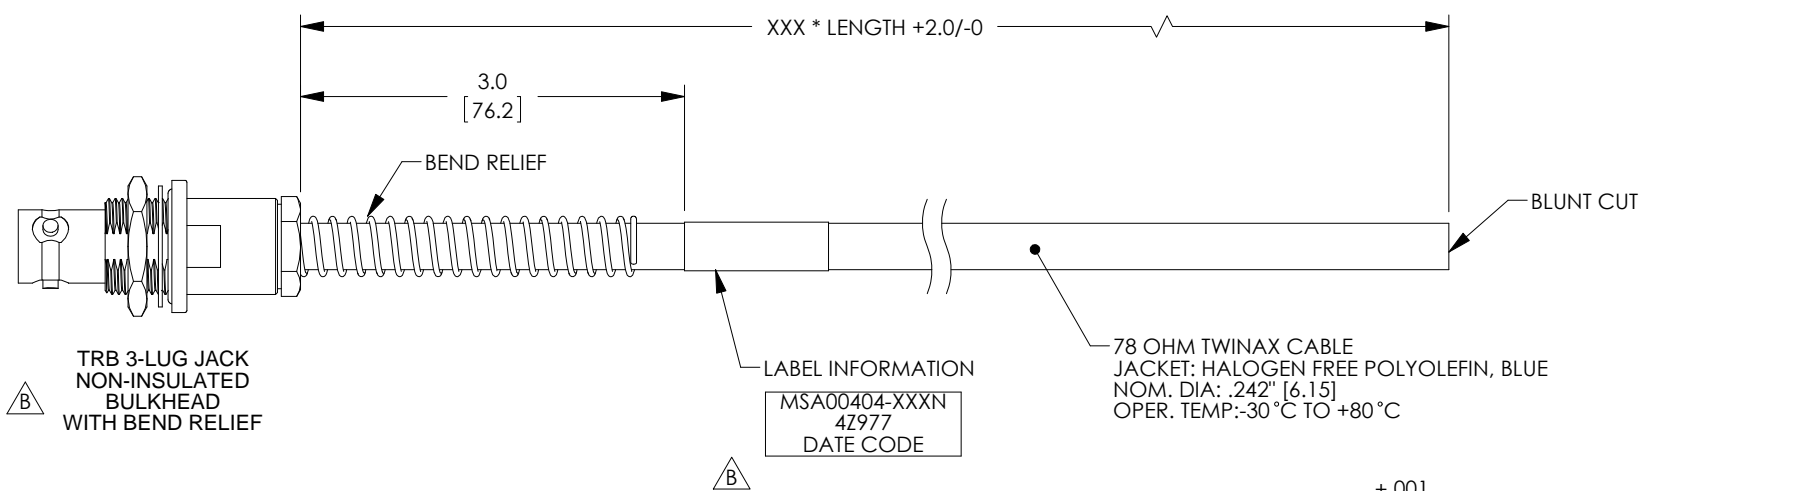


TRB 3-LUG JACK  
 NON-INSULATED  
 BULKHEAD  
 WITH BEND RELIEF

LABEL INFORMATION  
 MSA00404-XXXN  
 4Z977  
 DATE CODE

78 OHM TWINAX CABLE  
 JACKET: HALOGEN FREE POLYOLEFIN, BLUE  
 NOM. DIA: .242" [6.15]  
 OPER. TEMP: -30 °C TO +80 °C

LENGTH CODE CHART		
CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00404-XXXN	WHERE XXX = LENGTH IN INCHES	MSA00404-12N (12.0 INCHES)

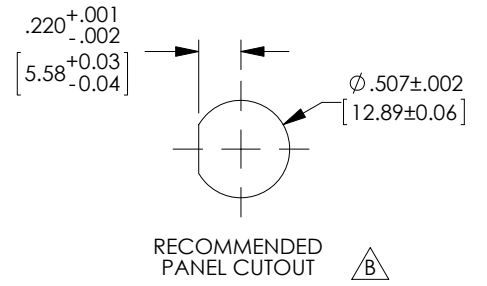

**NON CONTROLLED DRAWING IF PRINTED**

- NOTES:**
- \*XXX = LENGTH IN INCHES
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
DASH	NEXT ASSY	USED ON	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE		MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086
			OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	G.HUAN	07/18/17		
			ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY: M.HEARN	07/19/17	TITLE	HF TWNX NI BHBR J-BLNT
			CUSTOMER REFERENCE DOCUMENT:	APPROVED ENGINEERING: M.HEARN	07/19/17	SIZE	
			APPLICATION	CUSTOMER APPROVAL		SCALE: NTS	SHEET 1 OF 1
				CAGE CODE: 4Z977			