

8

7

6

5

4

3

2

1

PROPRIETARY NOTICE


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

MSA00405-XXXX

A

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/17	G.HUAN
B	ECN 8899: REVISE DESCR, TITLE, ADD DETAIL, REMOVE NOTE 2	8/29/17	D.FRISIELLO

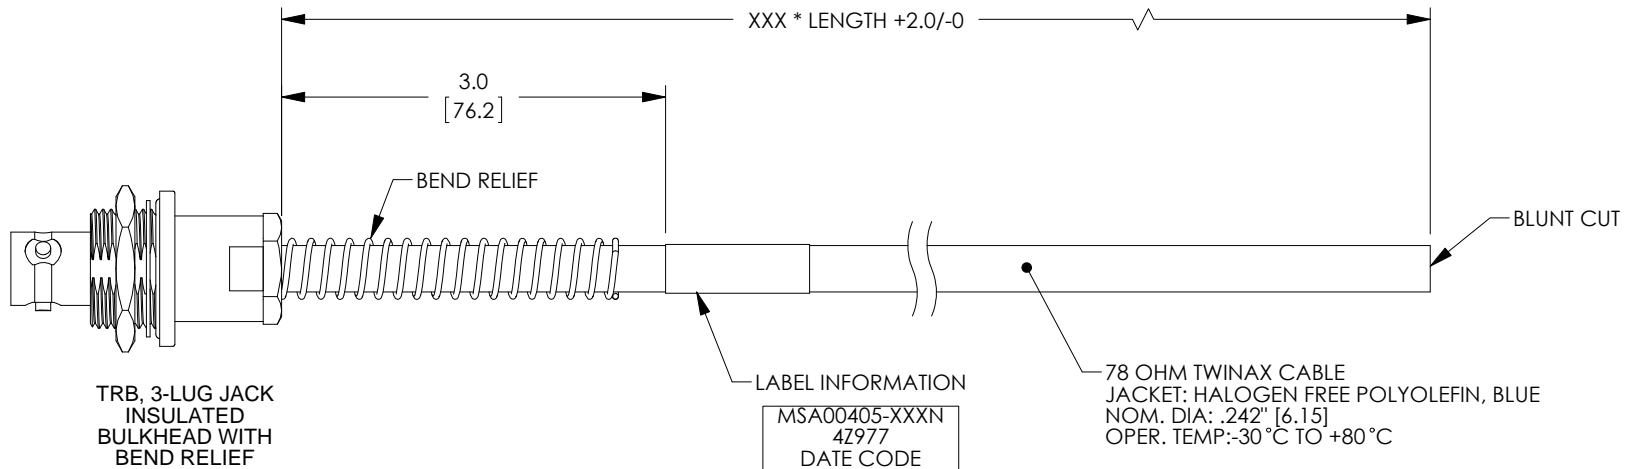

TRB, 3-LUG JACK
INSULATED
BULKHEAD WITH
BEND RELIEF


LABEL INFORMATION

MSA00405-XXXX
4Z977
DATE CODE


78 OHM TWINAX CABLE
JACKET: HALOGEN FREE POLYOLEFIN, BLUE
NOM. DIA: .242" [6.15]
OPER. TEMP: -30°C TO +80°C

LENGTH CODE CHART

CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00405-XXN	WHERE XXX = LENGTH IN INCHES	MSA00405-12N (12.0 INCHES)



WIRING MAP

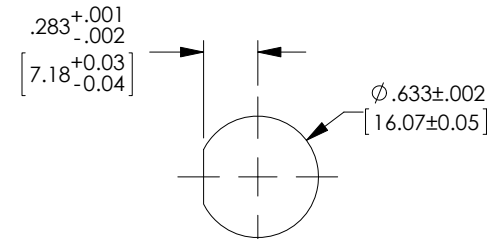

RECOMMENDED
PANEL CUTOUT

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE		MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086
			OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	G.HUAN	07/18/17		
			ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [13]	M.HEARN	07/19/17	DRAWING NUMBER: MSA00405-XXXX	
				M.HEARN	07/19/17		SCALE: NTS
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CUSTOMER APPROVAL			
APPLICATION			CAGE CODE: 4Z977				

NOTES:

- *XXX = LENGTH IN INCHES
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

8

7

6

5

4

3

2

1