


8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	REVISIONS		
	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/17	G.HUAN
B	ECN 8899: DELETED NOTE 2, REVISED DESCRIPTION, TITLE	8/30/17	D.FRISIELLO


MSA00408-XXXN  
**A**

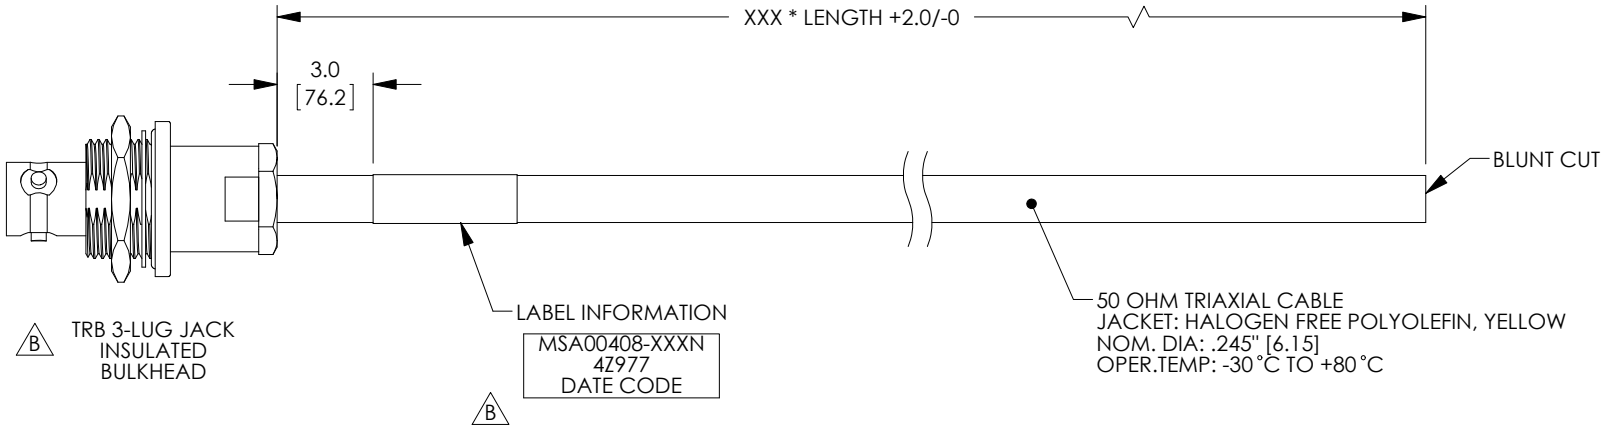

**B** TRB 3-LUG JACK INSULATED BULKHEAD

Label Information  
MSA00408-XXXN  
4Z977  
DATE CODE

50 OHM TRIAXIAL CABLE  
JACKET: HALOGEN FREE POLYOLEFIN, YELLOW  
NOM. DIA: .245" [6.15]  
OPER. TEMP: -30°C TO +80°C



LENGTH CODE CHART		
CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00408-XXN	WHERE XXX = LENGTH IN INCHES	MSA00408-12N (12.0 INCHES)

**NON CONTROLLED DRAWING IF PRINTED**

**B**

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES			SIGNATURE	DATE	<b>MilesTek</b>	MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%			G.HUAN	07/18/17		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.27]			M.HEARN	07/19/17	CA HF TRIAX IN BH J-BLNT	
CUSTOMER REFERENCE DOCUMENT:			M.HEARN	07/19/17	SIZE	DRAWING NUMBER:
DASH	NEXT ASSY	USED ON	CUSTOMER APPROVAL		<b>A</b>	MSA00408-XXXN
APPLICATION			CAGE CODE: 4Z977	SCALE: NTS	SHEET 1 OF 1	

- NOTES:**
- \*XXX = LENGTH IN INCHES
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

8 7 6 5 4 3 2 1