



PROPRIETARY NOTICE
This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.


LEAD FREE SOLDER

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/28/2019	DFRISIELLO

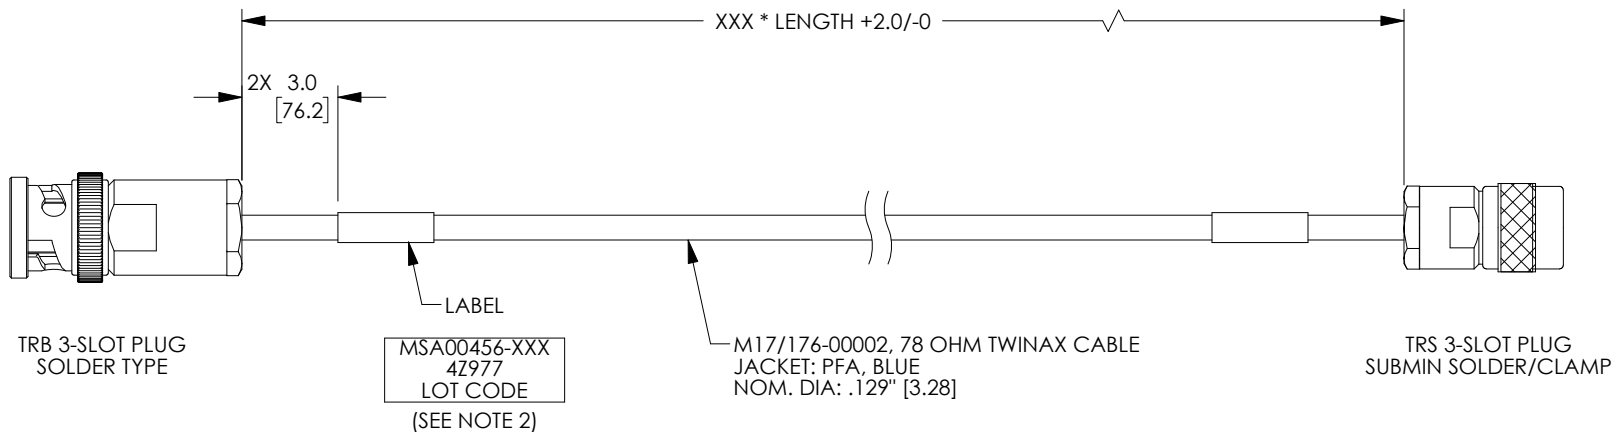

MODEL NUMBER	LENGTH METERS [FEET]
MSA00456-03M	0.3 [1.0]
MSA00456-05M	0.5 [1.64]
MSA00456-075M	0.75 [2.46]
MSA00456-1M	1.0 [3.28]
MSA00456-2M	2.0 [6.56]
MSA00456-3M	3.0 [9.84]
MSA00456-4M	4.0 [13.12]
MSA00456-6M	6.0 [19.69]

- NOTES:
- *XXX = LENGTH IN INCHES
*XXXM = LENGTH IN METERS
 - CABLES 48" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 48" HAVE 2 LABELS, ONE AT EACH END 3.0" FROM THE BACK OF THE CONNECTOR.
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - ALL MATERIALS USED ARE CERTIFIED RoHS COMPLIANT.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE		DATE		 Military Aerospace Communications Industrial	MILESTEK CORPORATION 301 LEORA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047		
	DRAWN BY: DFRISIELLO		01/28/2019					
	CHECKED BY: MHEARN		01/28/2019					
	APPROVED BY: MHEARN		01/28/2019					
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤40 [1524] = +2 [51] / -0 >40 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY					TITLE LEAD FREE HT TWNX SUBM P-TRB P		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]						SIZE A	DRAWING NUMBER: MSA00456	REV. A
CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 4Z977					SCALE: NTS		
						SHEET 1 OF 1		