




С

B

А



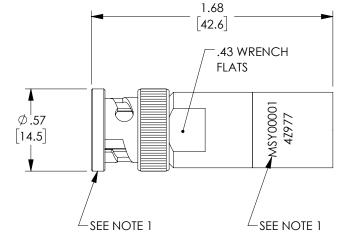



WIRE-WOUND NON-INDUCTIVE RESISTOR 1% TOLERANCE 2 WATT, AVAILABLE WITH 78.7, 1000, 2000 OR 3000 OHM VALUE

REGULATORY COMPLIANCE:

EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

7

6

REACH COMPLIANT

NOTES:

С

В

А

1. LABELING MAY EXIST IN MORE THAN ONE PLACE. MARKED AROUND THE COLLAR OR AROUND THE BODY SIGNATURE UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DATE MILESTEK CORPORATION 301 LEORA LANE, SUITE 100 MilesTek WITH A LABEL, OR BOTH. WN BY: D7INN LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047 03/20/2019 OVERALL CABLE LENGTH TOLERANCE: \$12 [305] =+1 [25] /-0 >12 [305] 560 [1524] =+2 [51] /-0 >60 [1524] \$300 [7620] =+6 [102] /-0 >120 [3048] \$300 [7620] =+6 [152] /-0 >300 [7620] =+5% /-0% 03/20/2019 DFRISIELLO 2. USE TERMINATORS AT EACH END OF THE BUS. TITI F 03/20/2019 MHEARN ROHS BUS TERMINATOR 78 OHM 3 CONFIGURATION DETAILS OF ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [.13] SLOT NO CHAIN 3. A STUB TERMINATOR IS NEEDED TO SIMULATE A FUTURE UNDIMENSIONED FEATURES MAY VARY LOAD FROM AN UNSPECIFIED DEVICE. SIZE DRAWING NUMBER: REV. Α MSY00001 А CAGE CODE: 4Z977 SCALE: NTS SHEET 1 OF 1 8 5 2

4

3