



N Male Right Angle to N Male Using Flexible RG214 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00075

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: RG214

Features

- Max Frequency 11 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications

- General Purpose
- Laboratory Use

Description

MilesTek's MTCA00075 coaxial cable assembly is a N male right angle to N male using flexible RG214 coax cable. MilesTek cables are built using high quality materials and are tested to insure these assemblies meet all performance specifications. Coaxial cable assemblies are stocked in standard lengths and will ship same day. Custom lengths of this cable assembly are also available upon request. These assemblies are part of MilesTek's extensive portfolio of products that are in stock and ship same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			1,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.01	0.1	1	5	10	GHz
Insertion Loss (Typ.)	0.006	0.021	0.077	0.207	0.365	dB/ft
	0.02	0.07	0.25	0.68	1.2	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.15 dB for the right angle connector.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Using Flexible RG214 Coax Cable MTCA00075](#)



N Male Right Angle to N Male Using Flexible RG214 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00075

Mechanical Specifications

Cable Assembly

Diameter 0.8 in [20.32 mm]

Cable

Cable Type RG214
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper, Silver
 Dielectric Type PE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.425 in [10.8 mm]

Repeated Minimum Bend Radius 1.6 in [40.64 mm]

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Temperature

Operating Range -20 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Using Flexible RG214 Coax Cable MTCA00075](#)



N Male Right Angle to N Male Using Flexible RG214 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00075

How to Order

Part Number Configuration:

MTCA00075

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: MTCA00075-12 = 12 inches long cable
MTCA00075-100cm = 100 cm long cable

Our offering, used primarily in military, R&D and production applications, consists of a comprehensive line of MIL-STD-1553B data bus couplers, harnesses and cable assemblies, connectors and connector termination systems. MilesTek also offers expertise in manufacturing custom cable assemblies and harnesses.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Using Flexible RG214 Coax Cable MTCA00075](#)

URL: <https://www.milestek.com/N-Male-N-Male-MTRG214U-MTCA00075-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. MilesTek reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. MilesTek does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and MilesTek does not assume any liability arising out of the use of any part or documentation.

MTCA00075 CAD Drawing

N Male Right Angle to N Male Using Flexible RG214 Coax Cable

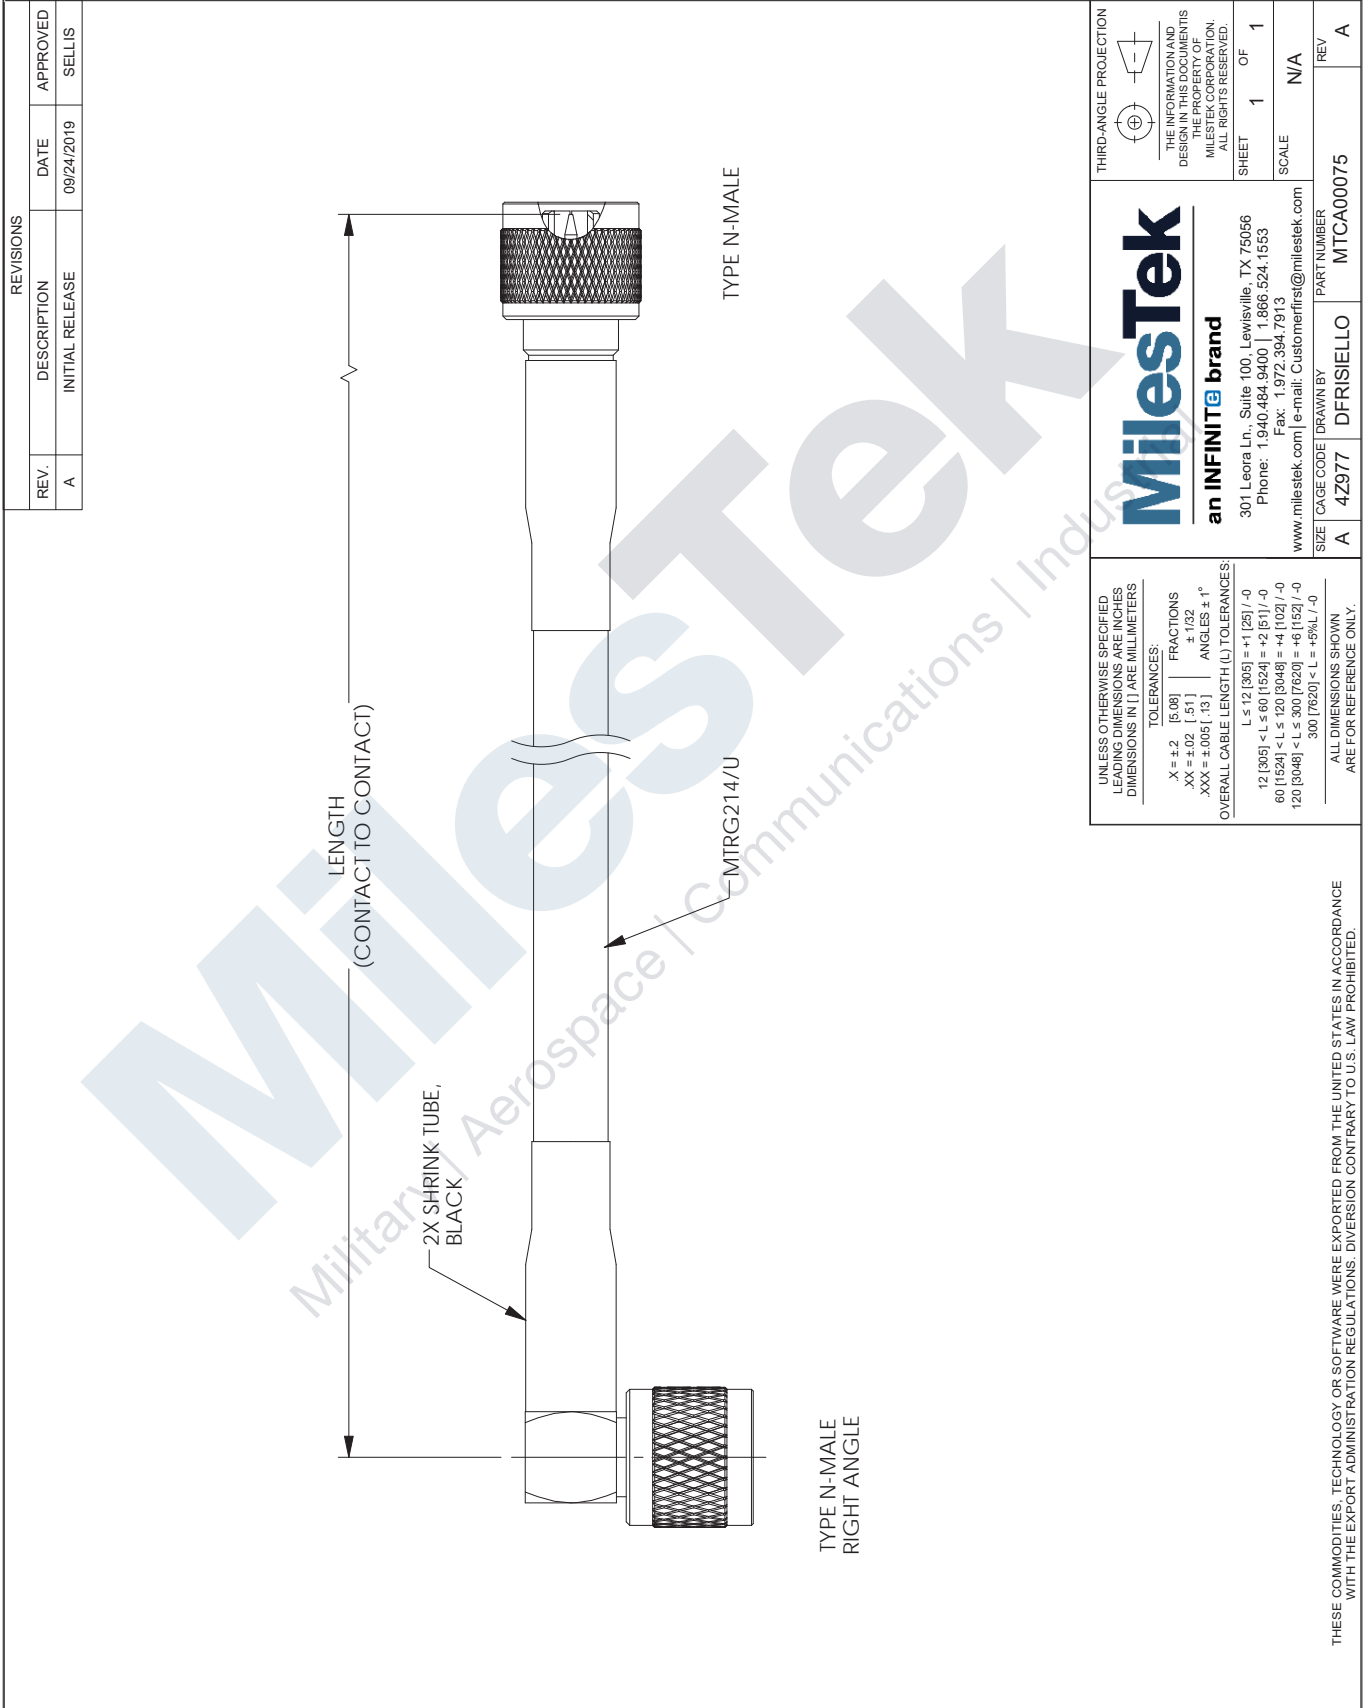

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/24/2019	SELLIS

 <p>MilestTek an INFINITE brand</p> <p>301 Leora Ln., Suite 100, Lewisville, TX 75056 Phone: 1.940.484.9400 1.866.524.1553 Fax: 1.972.394.7913 www.milestek.com e-mail: Customerfirst@milestek.com</p>		<p>THIRD-ANGLE PROJECTION</p>  <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF MILESTEK CORPORATION. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>X = ±.2 [5.08] FRACTIONS ± 1/32</p> <p>XX = ±.02 [.51] ANGLES ± 1°</p> <p>XXX = ±.005 [.13]</p> <p>OVERALL CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +.1 [25] / -0</p> <p>12 [305] < L ≤ 60 [1524] = +.2 [51] / -0</p> <p>60 [1524] < L ≤ 120 [3048] = +.4 [102] / -0</p> <p>120 [3048] < L ≤ 300 [7620] = +.6 [152] / -0</p> <p>300 [7620] < L = +.9% L / -0</p>	<p>SIZE A</p> <p>CAGE CODE 4Z977</p> <p>DRAWN BY DFRISIELLO</p> <p>PART NUMBER MTC000075</p>	
<p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.</p>		<p>REV A</p>