



SMA Male to SMA Female Using Flexible RG174 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00115

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

Applications

- General Purpose
- Laboratory Use

Description

MilesTek's MTCA00115 coaxial cable assembly is a SMA male to SMA female using flexible RG174 coax cable. MilesTek cables are built using high quality materials and are tested to insure these assemblies meet all performance specifications. Coaxial cable assemblies are stocked in standard lengths and will ship same day. Custom lengths of this cable assembly are also available upon request. These assemblies are part of MilesTek's extensive portfolio of products that are in stock and ship same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	100	400	1,000			MHz
Insertion Loss (Typ.)	0.084	0.19	0.32			dB/ft
	0.28	0.62	1.05			dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Using Flexible RG174 Coax Cable MTCA00115](#)



SMA Male to SMA Female Using Flexible RG174 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00115

Mechanical Specifications

Cable Assembly

Diameter	0.312 in [7.92 mm]
Weight	0.023 lbs [10.43 g]

Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE (LD)
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.1 in [2.54 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Mating Cycles		100
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30μ in. Minimum	
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100μ in. Minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. Minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Using Flexible RG174 Coax Cable MTCA00115](#)



SMA Male to SMA Female Using Flexible RG174 Coax Cable

RF Cable Assemblies Technical Data Sheet

MTCA00115

How to Order

Part Number Configuration:

MTCA00115

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: MTCA00115-12 = 12 inches long cable
MTCA00115-100cm = 100 cm long cable

Our offering, used primarily in military, R&D and production applications, consists of a comprehensive line of MIL-STD-1553B data bus couplers, harnesses and cable assemblies, connectors and connector termination systems. MilesTek also offers expertise in manufacturing custom cable assemblies and harnesses.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Using Flexible RG174 Coax Cable MTCA00115](#)


URL: <https://www.milestek.com/SMA-Male-SMA-Female-MTRG174AU-MTCA00115-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. MilesTek reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. MilesTek does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and MilesTek does not assume any liability arising out of the use of any part or documentation.

MTCA00115 CAD Drawing

SMA Male to SMA Female Using Flexible RG174 Coax Cable

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/25/2019	SELLIS

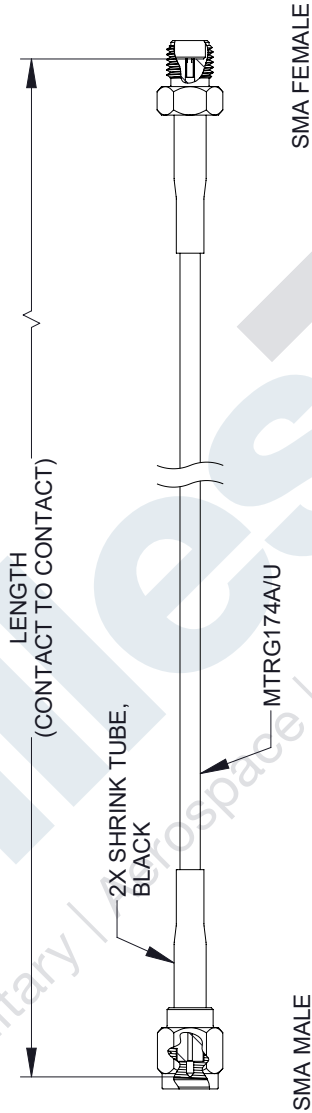

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:		
.X = ±.2	[.508]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

OVERALL CABLE LENGTH (L) TOLERANCE

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION



THE INFORMATION AND
DESIGN IN THIS DOCUMENT IS
THE PROPERTY OF
MILESTEK CORPORATION.
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE	N/A
-------	-----

REV	N/A
-----	-----

MilesTek

an INFINITE® brand

301 Leora Ln., Suite 100, Lewisville, TX 75056

Phone: 1.940.484.9400 | 1.866.524.1553

Fax: 1.972.394.7913
www.milestek.com | e-mail: Customerfirst@milestek.com

CAGE CODE	DRAWN BY	PART NUMBER
-----------	----------	-------------

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.