



SMA Jack Bulkhead Mount 50 Ohm Coax Connector Crimp Attachment for RG55, RG142, RG223, RG400, RG141, .235 inch D Hole

RF Connectors Technical Data Sheet

MTCN0019

Configuration

- SMA Female Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry
- RG55, RG142, RG223, RG400, RG141 Interface Type
- Crimp/Solder Attachment
- Bulkhead

Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

MilesTek RF SMA bulkhead connector will ship the same day as purchased from our broad selection of military, aerospace and industrial radio frequency components. Our bulkhead SMA connector terminates to a coax interface which includes RG55, RG142, RG223, RG400 and RG141. This bulkhead SMA connector for coax has a 50 Ohm impedance and is just one part of our large, in-stock inventory.

Part number MTCN0019 SMA connector from MilesTek is a female gender (also known as jack). This RF connector from MilesTek has a 12.4 GHz maximum frequency. Our 12.4 GHz SMA connector maximum frequency applies to RG55, RG142, RG223, RG400 and RG141 interfaces but may vary between them. Our radio frequency SMA female (jack) crimp/solder connector is in-stock and does ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.3:1	
Operating Voltage (AC)			500	Vrms

Mechanical Specifications

Size	
Length	1.005 in [25.53 mm]
Width/Dia.	0.315 in [8.00 mm]
Weight	0.013 lbs [5.9 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold 50 µin minimum
Insulation	PTFE	
Body	Brass	Nickel 100 µin minimum
Crimp Sleeve	Brass	Nickel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Jack Bulkhead Mount 50 Ohm Coax Connector Crimp Attachment for RG55, RG142, RG223, RG400, RG141, .235 inch D Hole MTCN0019](#)



SMA Jack Bulkhead Mount 50 Ohm Coax Connector
Crimp Attachment for RG55, RG142, RG223,
RG400, RG141, .235 inch D Hole

RF Connectors Technical Data Sheet

MTCN0019

Washer	Brass	Nickel
[Redacted content]		

Environmental Specifications

Temperature

Operating Range

-65 to 165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Our offering, used primarily in military, R&D and production applications, consists of a comprehensive line of MIL-STD-1553B data bus couplers, harnesses and cable assemblies, connectors and connector termination systems. MilesTek also offers expertise in manufacturing custom cable assemblies and harnesses.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Jack Bulkhead Mount 50 Ohm Coax Connector Crimp Attachment for RG55, RG142, RG223, RG400, RG141, .235 inch D Hole MTCN0019](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. MilesTek reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. MilesTek does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and MilesTek does not assume any liability arising out of the use of any part or documentation.

MTCN0019 CAD Drawing

SMA Jack Bulkhead Mount 50 Ohm Coax Connector Crimp Attachment
for RG55, RG142, RG223, RG400, RG141, .235 inch D Hole

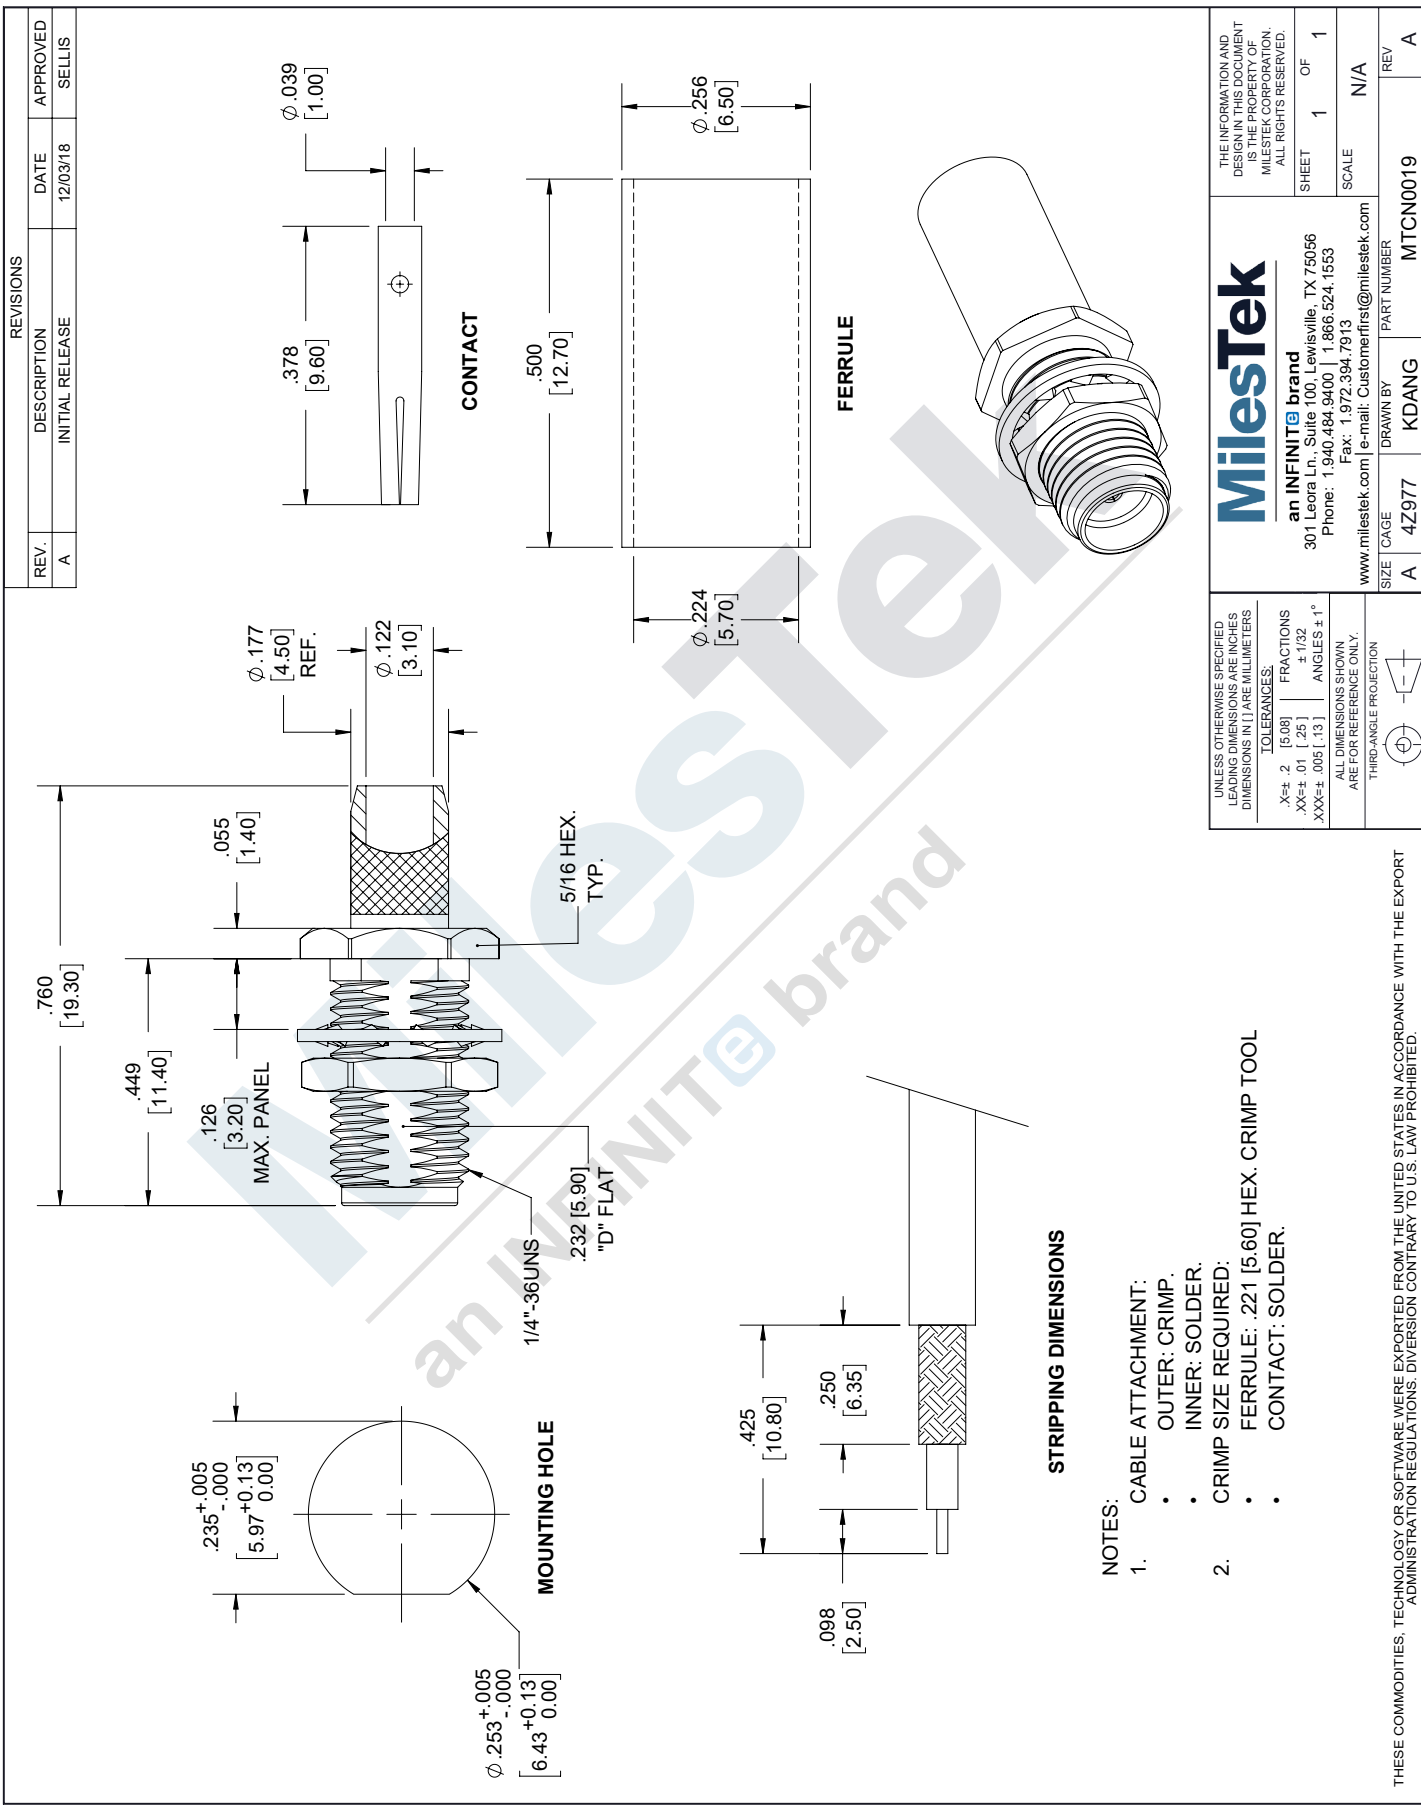

MilestTek
an INFINITE brand

301 Leora Ln., Suite 100, Lewisville, TX 75066
Phone: 1.940.484.9400 | 1.866.524.1553
Fax: 1.972.394.7913
www.milesttek.com | e-mail: Customerfirms@milesttek.com

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF MILESTEK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

SIZE	CAGE	DRAWN BY	PART NUMBER	REV
A	4Z977	KDANG	MTCN0019	A