



N Type Plug Right Angle 50 Ohm Coax Connector Crimp
Attachment for RG214, RG9, RG225, RG393

RF Connectors Technical Data Sheet

MTCN0024

Configuration

- N Male Connector
 - MIL-STD-348A
 - 50 Ohms
- Right Angle Body Geometry
 - RG214, RG9, RG225, RG393 Interface Type
 - Crimp/Solder Attachment

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

MilesTek RF right angle N Type connector will ship the same day as purchased from our broad selection of military, aerospace and industrial radio frequency components. Our right angle N Type connector terminates to a coax interface which includes RG214, RG9, RG225 and RG393. This right angle N Type connector for coax has a 50 Ohm impedance and is just one part of our large, in-stock inventory.

Part number MTCN0024 N Type right angle connector from MilesTek is a male gender (also known as plug). This RF connector from MilesTek has a 11 GHz maximum frequency. Our 11 GHz N Type connector maximum frequency applies to RG214, RG9, RG225 and RG393 interfaces but may vary between them. Our radio frequency right angle N Type male (plug) crimp/solder connector is in-stock and does ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
Operating Voltage (AC)			1,500	Vrms
Dielectric Withstanding Voltage (AC)			2,500	Vrms
Inner Conductor DC Resistance			1	mOhms
Outer Conductor DC Resistance			1	mOhms
Insulation Resistance	5,000			MOhms
RF Leakage	90			dB

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6					GHz
VSWR, Max	1.5:1					
Insertion Loss, Max	0.15					dB

Mechanical Specifications

Size	
Length	1.99 in [50.55 mm]
Width/Dia.	0.8 in [20.32 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Type Plug Right Angle 50 Ohm Coax Connector Crimp Attachment for RG214, RG9, RG225, RG393 MTCN0024](#)



N Type Plug Right Angle 50 Ohm Coax Connector Crimp
Attachment for RG214, RG9, RG225, RG393

RF Connectors Technical Data Sheet MTCN0024

Table with 2 columns: Property, Value. Rows: Height (1.29 in [32.77 mm]), Weight (0.135 lbs [61.23 g]), Mating Cycles (500 Cycles).

Material Specifications

Table with 3 columns: Description, Material, Plating. Rows: Contact (Brass, Gold 30 µin minimum), Insulation (PTFE), Body (Brass, Nickel 100 µin minimum), Coupling Nut (Brass, Nickel), Crimp Sleeve (Brass, Nickel).

Environmental Specifications

Table with 2 columns: Specification, Value. Rows: Temperature (Operating Range: -65 to 165 deg C), Vibration (MIL-STD-202, Method 204, Condition B), Temperature Cycle (MIL-STD-202, Method 107, Condition B), Salt Spray (MIL-STD-202, Method 101, Condition B).

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:
Our offering, used primarily in military, R&D and production applications, consists of a comprehensive line of MIL-STD-1553B data bus couplers, harnesses and cable assemblies, connectors and connector termination systems. MilesTek also offers expertise in manufacturing custom cable assemblies and harnesses.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Type Plug Right Angle 50 Ohm Coax Connector Crimp Attachment for RG214, RG9, RG225, RG393 MTCN0024

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. MilesTek reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. MilesTek does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and MilesTek does not assume any liability arising out of the use of any part or documentation.

MTCN0024 CAD Drawing
N Type Plug Right Angle 50 Ohm Coax Connector Crimp
Attachment for RG214, RG9, RG225, RG393

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/03/2018	SELLIS

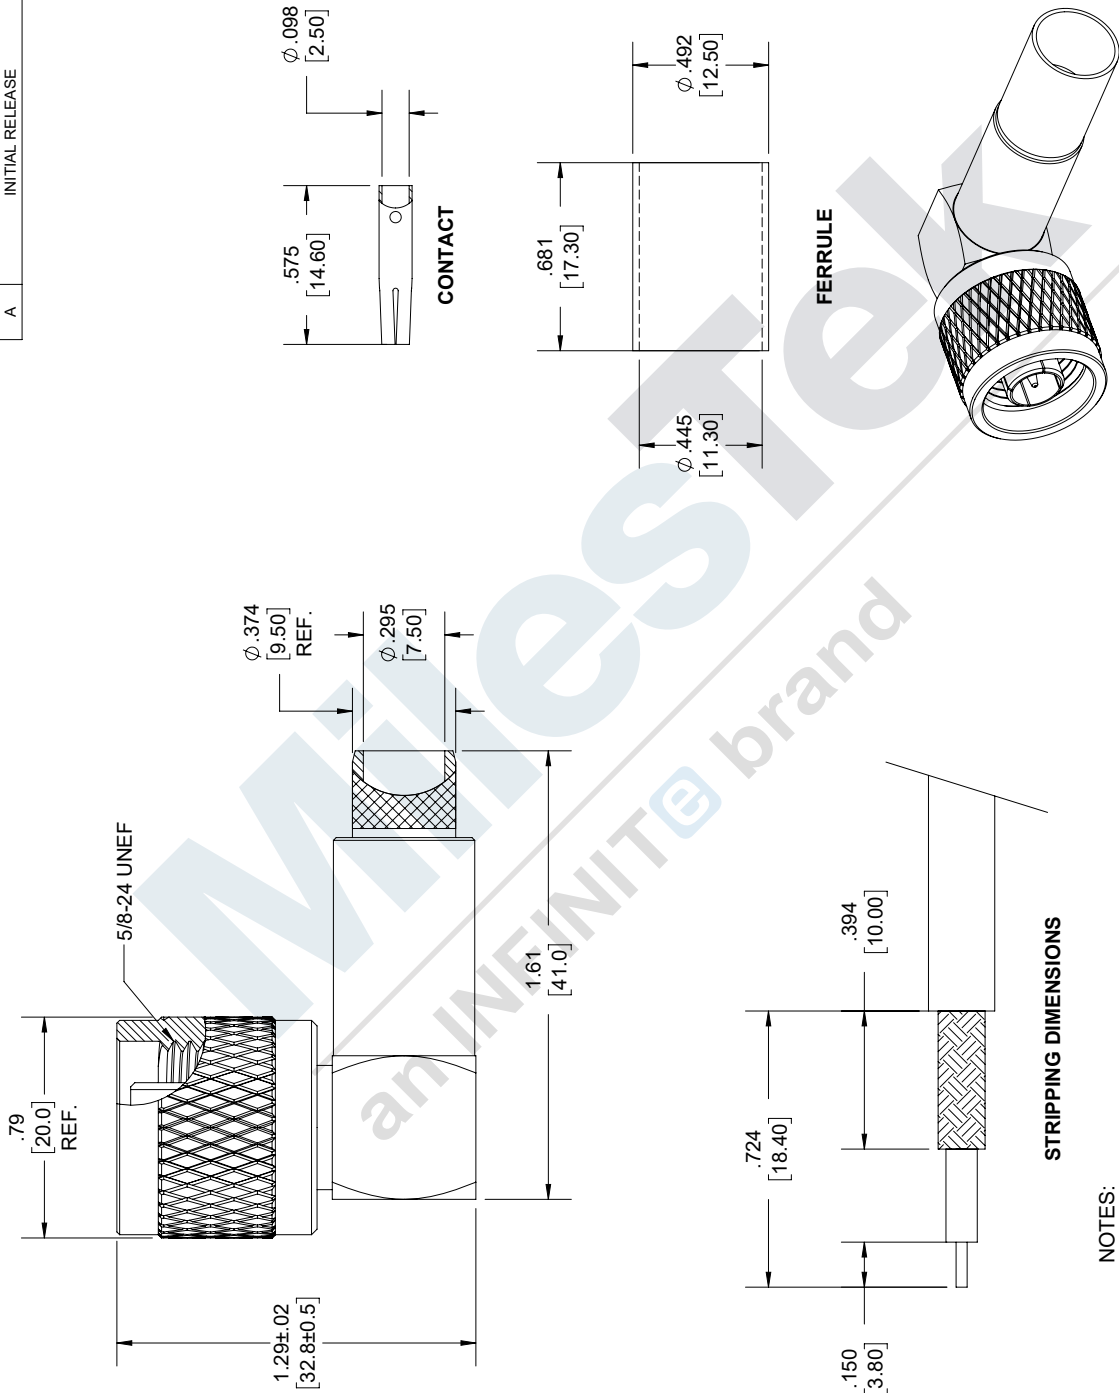

NOTES:

1. CABLE ATTACHMENT:
 - OUTER: CRIMP.
 - INNER: SOLDER.
2. CRIMP SIZE REQUIRED:
 - FERRULE: .429 [10.90] HEX. CRIMP TOOL.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE IN MILLIMETERS	
TOLERANCES:	FRACTIONS
.X±.2 [5.08]	± 1/32
.XX±.01 [25]	± 1/64
XXX±.005 [13]	± 1/128
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	
THIRD-ANGLE PROJECTION	

Milestek an INFINITE brand 301 Leora Ln, Suite 100, Lewisville, TX 75056 Phone: 1.940.484.9400 1.866.524.1553 Fax: 1.972.394.7913 www.milestek.com e-mail: Customerfrs@milestek.com	
SIZE	CAGE
A	42977
DRAWN BY	KDANG
PART NUMBER	MTCN0024
SCALE	N/A
SHEET	1 OF 1

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF MILESTEK CORPORATION. ALL RIGHTS RESERVED.	
REV	A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev-A