


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	7/2/18	DFRRIELLO


REVISIONS	

MUS200025	A
-----------	---


PROPRIETARY NOTICE  
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants the right to use, reproduce, or disseminate any part thereof, or to practice any method or process, except by written permission from or written agreement with MilesTek Corporation and its subsidiaries.

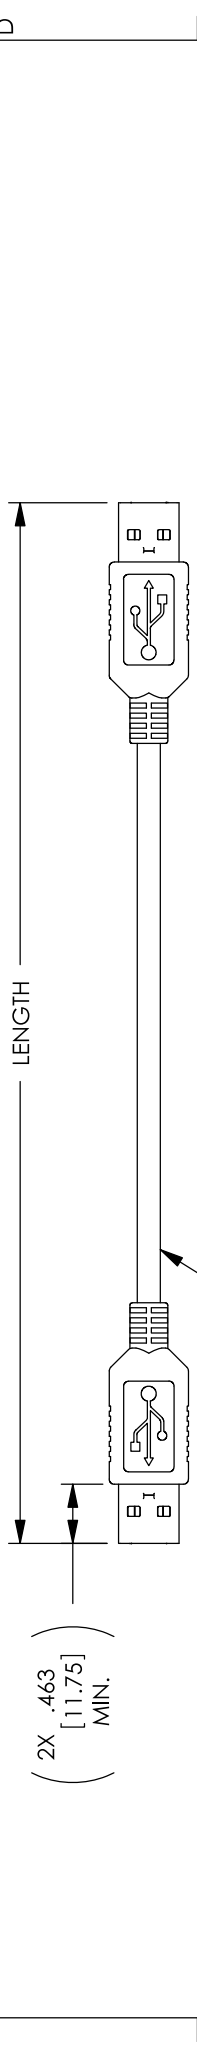

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR  
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS  
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE  
 PLUS TINNED COPPER BRAIDED SHIELD.  
 PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)



CONTACTS: 30 MICRONS GOLD PLATING

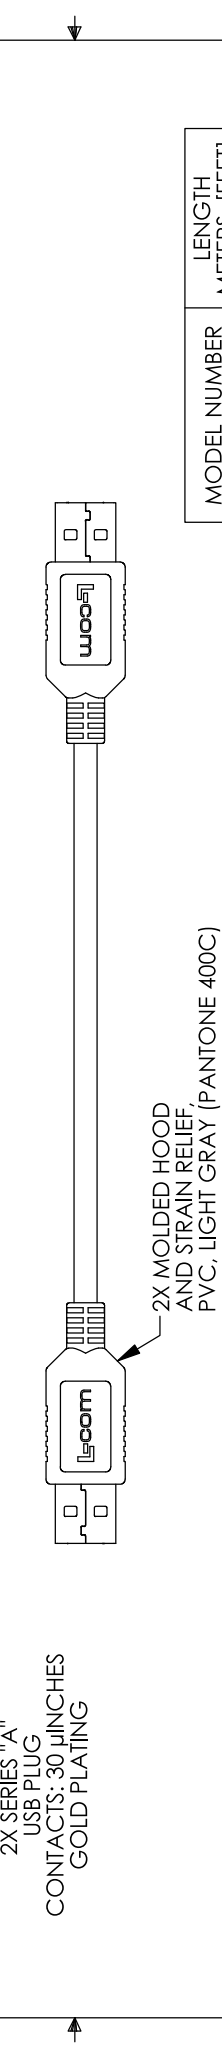

MODEL NUMBER	LENGTH METERS [FEET]
MUS200025-03M	0.3 [.98]
MUS200025-05M	0.5 [1.64]
MUS200025-075M	0.75 [2.46]
MUS200025-1M	1.0 [3.28]
MUS200025-2M	2.0 [6.56]
MUS200025-3M	3.0 [9.84]
MUS200025-4M	4.0 [13.12]
MUS200025-5M	5.0 [16.40]

**NON CONTROLLED DRAWING IF PRINTED**

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY	
SIGNATURE	DATE
DRAWN BY: DFRRIELLO	7/2/18
CHECKED BY: BGATES	7/9/18
APPROVED BY: BGATES	7/13/18
APPROVED MANUFACTURING:	
CUSTOMER APPROVAL	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	
OVERALL CABLE LENGTH TOLERANCE	
>12 [305] 560 [1524] = +.02 [-.01] / -0	
>12 [305] 560 [1524] = +.02 [-.01] / -0	
>120 [3048] 5320 [13512] = +.01 [-.02] / -0	
>300 [7620] = +.03% / -0%	
ALL OTHER DIMENSIONAL TOLERANCES:	
.X = ± .0150 [0.38]	
.XX = ± .003 [0.076]	
.XXX = ± .003 [0.076]	
CUSTOMER REFERENCE DOCUMENT:	
DASH	NEXT ASSY
USED ON	APPLICATION
MILESTEK CORPORATION 301 ROCKY HILL BLVD ROCKY HILL, CT 06106 PHONE: (949) 484-4400 FAX: (949) 564-1047	
TITLE PREMIUM USB 2.0 CBL TYPE AM-AM	
SHEET	DRAWING NUMBER:
A	MUS200025
SCALE: NTS	SHEET 1 OF 1

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (ROHS DIRECTIVE)