


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	7/2/18	DFRRIELLO


REVISIONS	

MUS200025	A
-----------	---

PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or warrants the right to use, reproduce, or disseminate any part thereof, and no information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

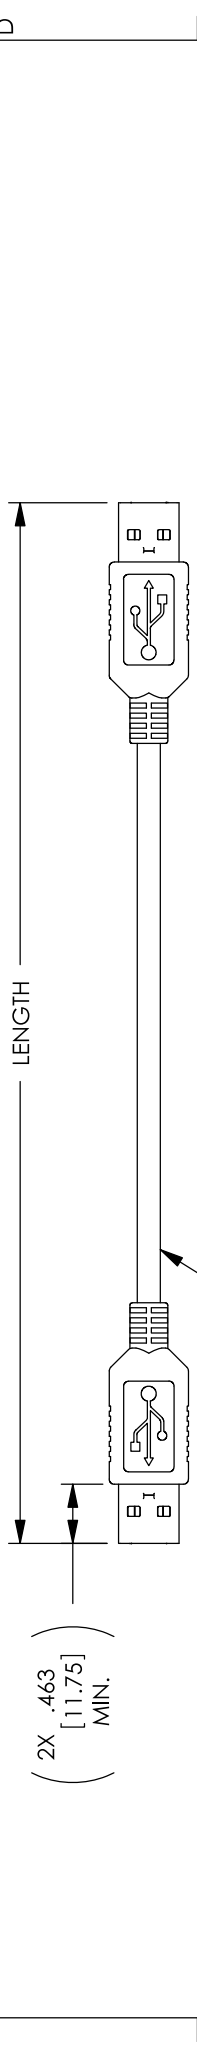


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
 PLUS TINNED COPPER BRAIDED SHIELD.
 PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)



DIELECTRIC

2X SERIES "A" USB PLUG

CONTACTS: 30 MICRONS GOLD PLATING

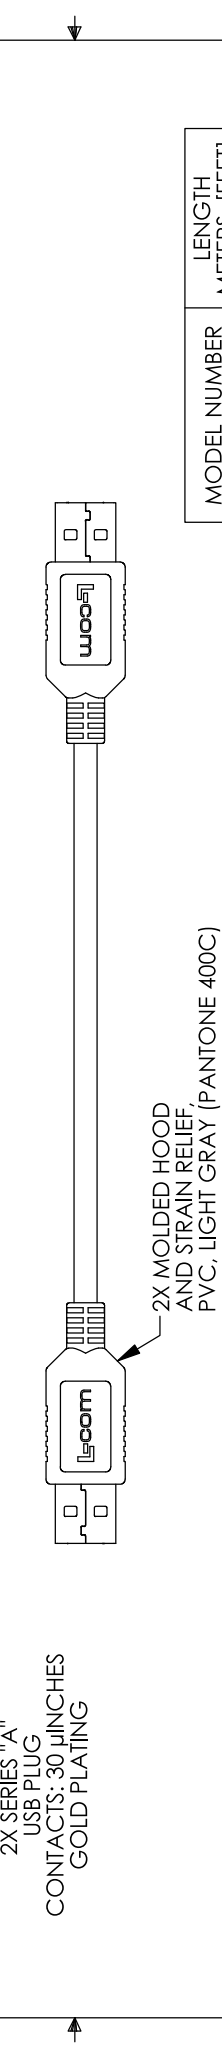

MODEL NUMBER	LENGTH METERS [FEET]
MUS200025-03M	0.3 [.98]
MUS200025-05M	0.5 [1.64]
MUS200025-075M	0.75 [2.46]
MUS200025-1M	1.0 [3.28]
MUS200025-2M	2.0 [6.56]
MUS200025-3M	3.0 [9.84]
MUS200025-4M	4.0 [13.12]
MUS200025-5M	5.0 [16.40]

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY	
SIGNATURE	DATE
DRAWN BY: DFRRIELLO	7/2/18
CHECKED BY: BGATES	7/9/18
APPROVED BY: BGATES	7/13/18
APPROVED MANUFACTURING:	
CUSTOMER APPROVAL	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	
OVERALL CABLE LENGTH TOLERANCE	
S12 (300) S60 (1524) = +.02 / -.00	
>S12 (300) S60 (1524) = +.01 / -.00	
>S12 (300) S60 (1524) = +.01 / -.00	
>S12 (300) S60 (1524) = +.01 / -.00	
>S12 (300) S60 (1524) = +.01 / -.00	
ALL OTHER DIMENSIONAL TOLERANCES:	
X = ± .015 (381)	
Y = ± .015 (381)	
Z = ± .015 (381)	
XXX = ± .003 (76.2)	
CUSTOMER REFERENCE DOCUMENT:	
DASH	NEXT ASSY
	USED ON
APPLICATION	
CAGE CODE: 42977	
DRAWING NUMBER: A MUS200025	
SCALE: NTS	
SHEET 1 OF 1	

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU (ROHS DIRECTIVE)