


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILESTEK, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF MILESTEK, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/03/2019	GUITADAURO

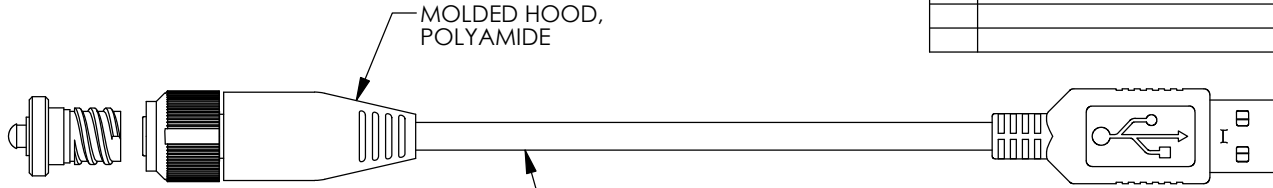


MOLDED HOOD, POLYAMIDE

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 22AWG CONDUCTORS STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH STRANDED TINNED COPPER DRAIN WIRE PLUS TINNED COPPER BRAIDED SHIELD.
JACKET: LSZH, BLACK
CABLE UL VW-1 RATED

PROTECTIVE COVER

"P1"




"P2"


GLENAIR MIGHTY MOUSE
801-007-16NF6-4PA
PLUG CONNECTOR, 4 PIN CONTACTS,
ALUMINIUM/CADMIUM FINISH W/ OLIVE DRAB CHROMATE

USB SERIES "A" PLUG
MOLDED HOOD
LSZH

LENGTH

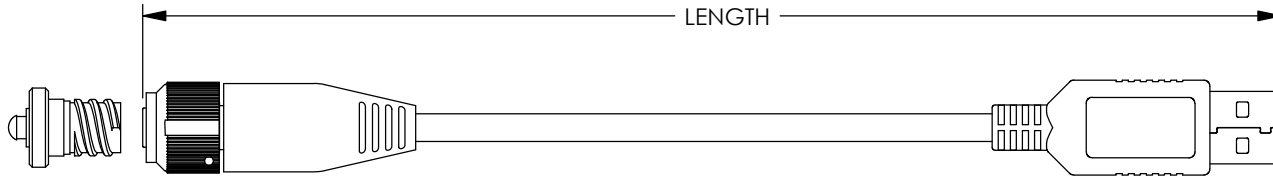

"P1" WIRING DIAGRAM "P2"

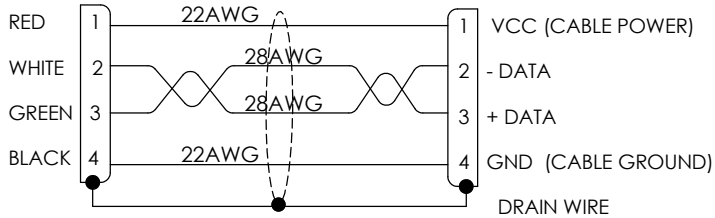

MODEL NUMBER	LENGTH FEET [METER]
MUS2A00025-1F	1 [.30]
MUS2A00025-3F	3 [.91]
MUS2A00025-5F	5 [1.52]
MUS2A00025-10F	10 [3.05]

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- TEST ASSEMBLY FOR SHORTS, CONTINUITY, AND INSULATION RESISTANCE 200 MEGAOHMS MIN.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- TETHER FOR PROTECTIVE COVER INCLUDED BUT NOT SHOWN.
- LABEL SHALL BE PLACED ON CABLE WITH GLENAIR P/N AND DATE CODE.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ±1/32 .XX = ±.02 [5] ANGLES ±1° .XXX = ±.005 [1.3]	APPROVALS	DATE	 an INFINIT® brand	301 Leora Ln., Suite 100, Lewisville, TX 75056 Phone: 1.940.484.9400 1.866.524.1553
	DRAWN BY BPUCHASKI	12/03/2019		
THIRD-ANGLE PROJECTION 	CHECKED BY DFRISIELLO	12/03/2019	CATEGORY USB	
	APPROVED BY GUITADAURO	12/03/2019	PRODUCT DESCRIPTION USB 2.0 MM-M AM 801 AL/CD OLIVE LSZH W/ DC	
COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 4Z977	DWG. NO. MUS2A00025	REV. A
SCALE: NONE		SCALE: MUS2A00025.SLDDRW		SHEET 1 OF 1