


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/4/18	D:FRISIELLO

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/4/18	D:FRISIELLO

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/4/18	D:FRISIELLO

PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the subject matter, and any disclosure of any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

Cable: UL2464
 26AWG(7/0.16TC)*2C+PAPER,
 OD=4.0±0.15mm,
 Jacket Color: Black

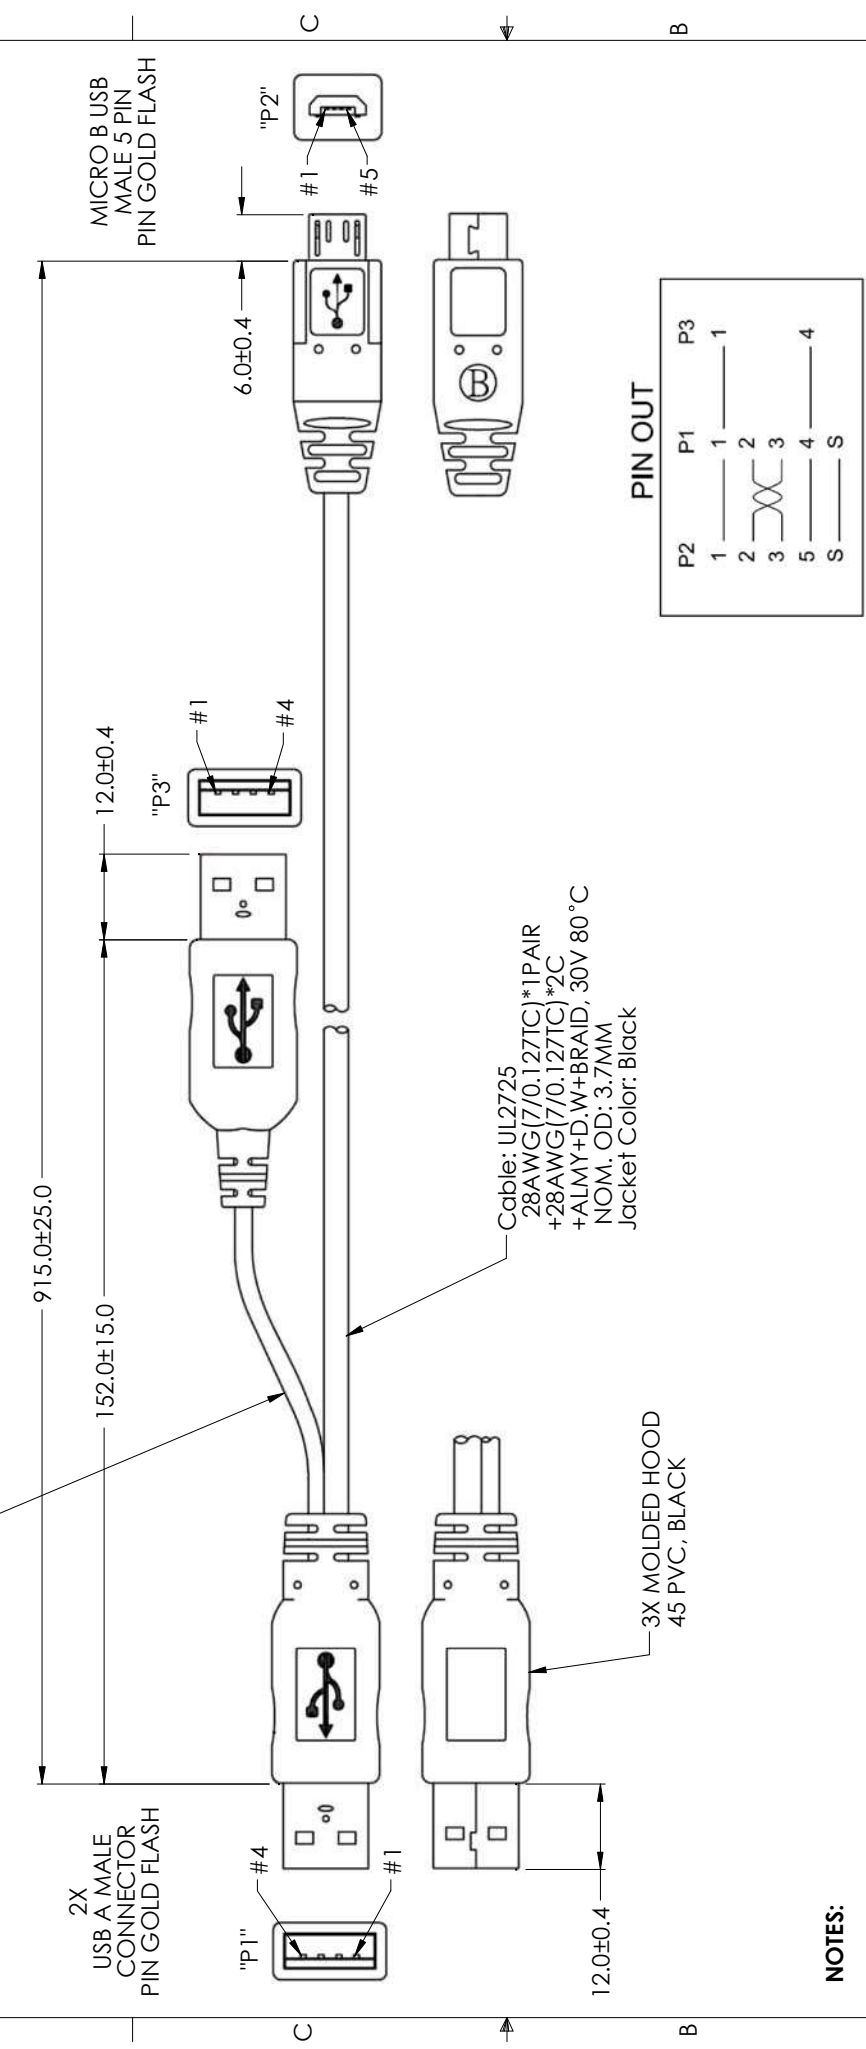

NOTES:
TESTING:
 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY

ELECTRICAL PROPERTIES:
 2. CABLE SHALL BE 100% ELECTRICALLY TESTED
 3. VOLTAGE TEST: DC 300V 10ms
 INSULATION RESISTANCE: 5.0M ohm/min
 CONDUCTANCE RESISTANCE: 5.0 ohm/max

MISCELLANEOUS:
 1. ALL DIMENSIONS ARE "mm" UNLESS OTHERWISE SPECIFIED

REGULATORY COMPLIANCE:
 CE 2011/65/EU(RoHS DIRECTIVE)

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	
OVERALL CABLE LENGTH TOLERANCE: >12 (305) 560 (1424) = +2 (51) / 0 >12 (305) 560 (1424) = +1 (25) / 0 >120 (3048) -3200 (7620) = +4 (102) / 0 >300 (7620) = +3% / -0%	DRAWN BY: D:FRISIELLO	5/4/18	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.015(0.38) .XX = ±.003 (0.075) .XXX = ±.001 (0.025)	CHECKED BY: E:AMOTT	5/4/18	
CUSTOMER REFERENCE DOCUMENT:	APPROVED BY: B:GAIES	5/4/18	
DASH	NEXT ASSY	USED ON	TITLE
			USB 2.0 A TO MICRO B Y SPLIT CABLE
			SHEET
			DRAWING NUMBER:
			MUS2C00001
			SCALE: NTS
			SHEET 1 OF 1