


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO

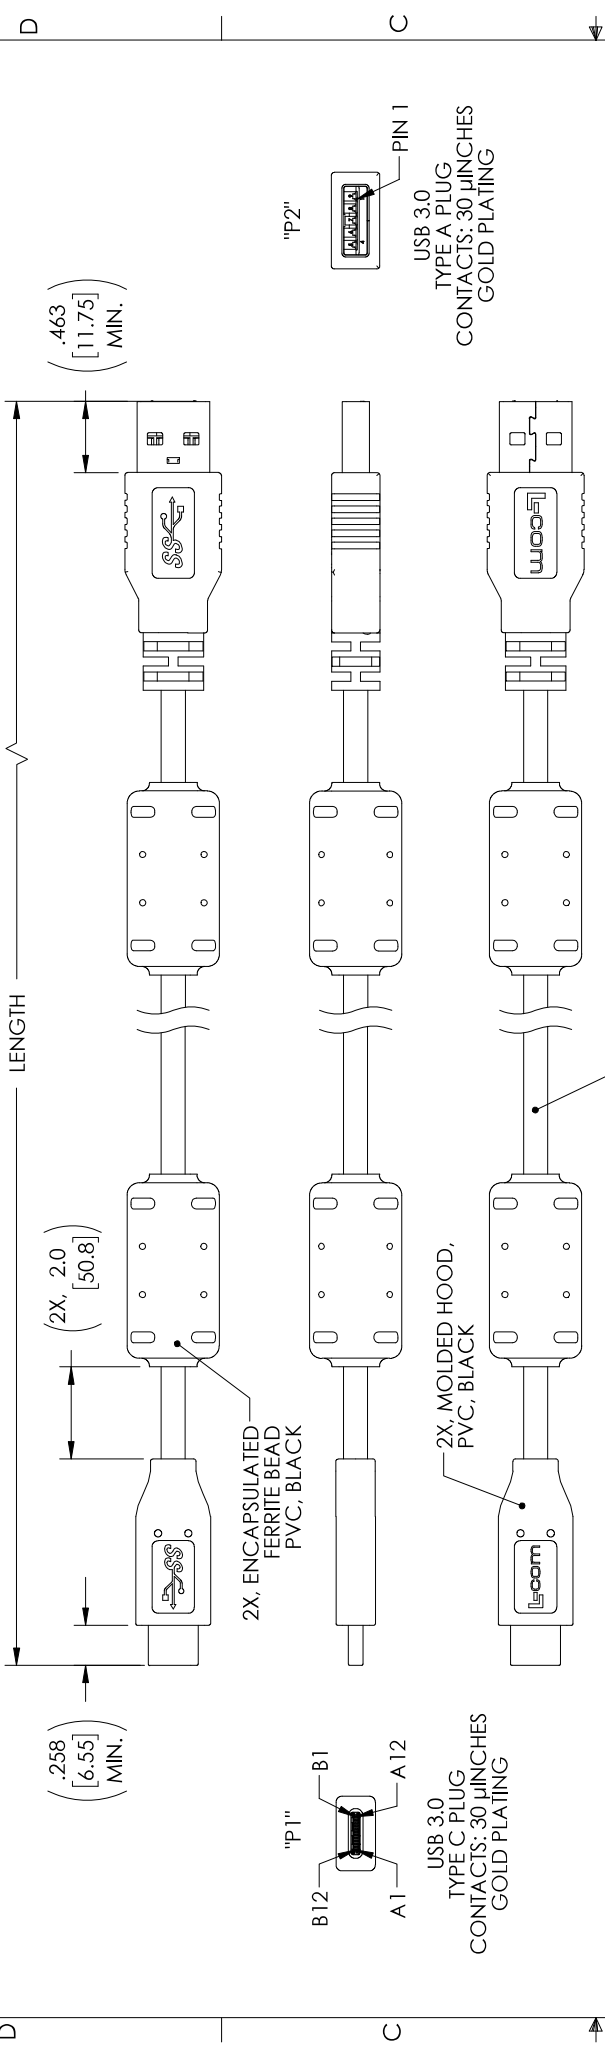

SIGNAL NAME	CONDUCTOR	"P2"	SIGNAL NAME	COLOR
A1, B1, A12, B12	INDV.	4	GND	BLACK
A4, B4, A9, B9	INDV.	7	GND_DRAIN	N/A
A5		1	V _{BUS}	RED
B5		N/C		
A6		N/C		
A7	UNSHIELDED PAIR	3	D+	GREEN
A2	SHIELDED PAIR 1	2	D-	WHITE
A3	SHIELDED PAIR 1	6	StdA_SSRX+	YELLOW
B11	SHIELDED PAIR 2	5	StdA_SSRX-	BLUE
B10	SHIELDED PAIR 2	9	StdA_SSTX+	ORANGE
SHELL	BRAID	8	StdA_SSTX-	PURPLE
			SHIELD	N/A

PART NUMBER	LENGTH METERS [FEET]
MUS3A00027-05M	0.5 [1.64]
MUS3A00027-1M	1.0 [3.28]

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- L-COM LOGO AND USB ICON MAY BE ON ANY SIDE OF THE OVERMOLD FOR USB SERIES "C" END.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
 >12 (305) 560 (1424) = +.0125 / -0
 >120 (3048) <-300 (7620) = +.0125 / -0
 >300 (7620) = +.03 / -.02

ALL OTHER DIMENSIONAL TOLERANCES:
 .X = ± .0001
 .XX = ± .0002
 .XXX = ± .0003 (.13)

CUSTOMER REFERENCE DOCUMENT: APPLICATION

DASH NEXT ASSY USED ON APPLICATION

SIGNATURE: D.FRIBELLO DATE: 5/8/18
 CHECKED BY: ELAMOTT DATE: 5/9/18
 APPROVED BY: B.C.GATES DATE: 5/9/18
 APPROVED MANUFACTURING: CUSTOMER APPROVAL

MILESTEK CORPORATION
 301 ROCKY HILL BLVD. SUITE 100
 ROCKY HILL, CT 06067
 PHONE: (860) 484-4400
 FAX: (860) 564-0487

TITLE: USB 3.0 TYPE A/C W/FERRITES CABLE

DRAWING NUMBER: MUS3A00027

SHEET 1 OF 1