


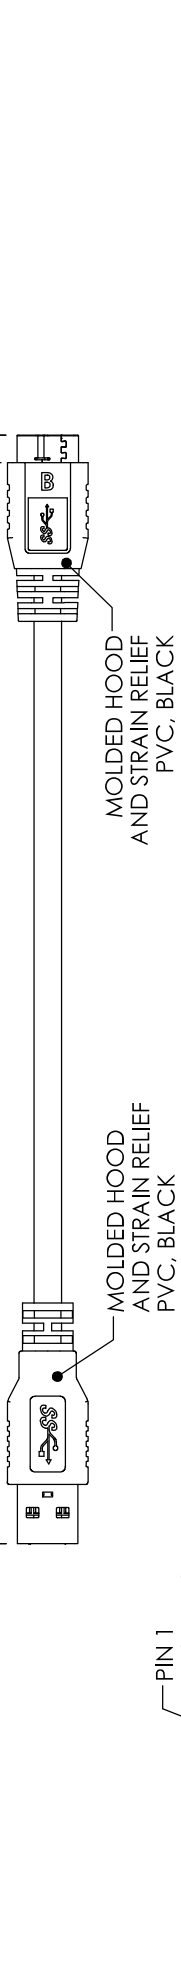


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the subject matter, and any disclosure of any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/18	B.PUCHASHKI



PART NUMBER	LENGTH METERS [FEET]
MUS3A00037-03M	0.3 [.98]
MUS3A00037-05M	0.5 [1.64]
MUS3A00037-075M	0.75 [2.46]

NON CONTROLLED DRAWING IF PRINTED

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY

SIGNATURE	DATE	APPROVED
B.PUCHASHKI	05/09/18	B.PUCHASHKI
CHECKED BY	DATE	APPROVED
J.JARBOY	05/09/18	B.C.GATES
APPROVED BY	DATE	APPROVED
B.C.GATES	05/09/18	B.C.GATES
APPROVED MANUFACTURING	DATE	APPROVED
	05/09/18	
CUSTOMER APPROVAL	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE

>12 (305) 560 (1424) = +.01 (-0) / -0

>120 (3048) 5300 (13462) = +.01 (0.25) / -0

>300 (7620) = +.03 / -.03

ALL OTHER DIMENSIONAL TOLERANCES:

X = ± .01 (0.25)

XX = ± .005 (0.127)

XXX = ± .003 (0.076)

CUSTOMER REFERENCE DOCUMENT:

DASH NEXT ASSY USED ON APPLICATION

CAGE CODE: 42977

DRAWING NUMBER: MUS3A00037

SCALE: NTS

SHEET 1 OF 1

NOTES:

- CABLE IS RATED FOR 10,000 BEND CYCLES, MINIMUM
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)