

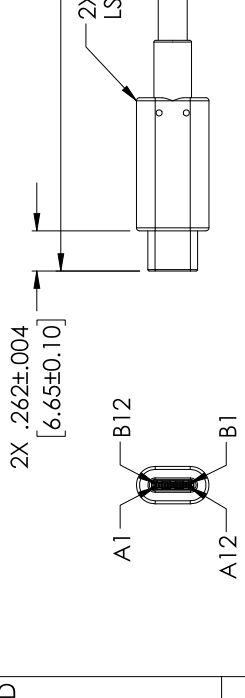
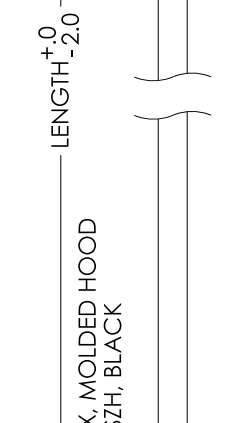


REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/15/2019	DGUITADAUR


REVISIONS

PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the content of any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.



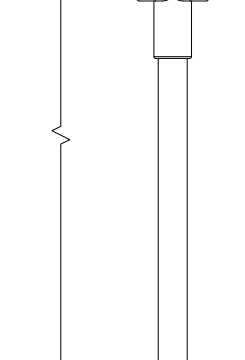


"P1"
 USB 3.1 TYPE C PLUG
 WITH E-MARK CHIP
 GOLD PLATED CONTACTS
 NICKEL PLATED SHELL

"P2"
 USB 3.1 TYPE C PLUG
 GOLD PLATED CONTACTS
 NICKEL PLATED SHELL



PART NUMBER	LENGTH METERS [FEET]
MUS3A00060-03M	0.3 [.98]
MUS3A00060-05M	0.5 [1.64]
MUS3A00060-1M	1.0 [3.28]

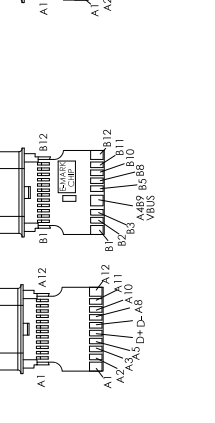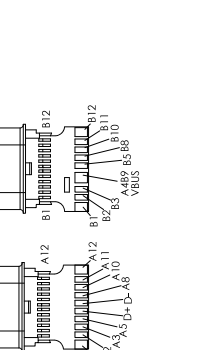

NOTES:

- CABLE: [32AWG*1P+EAM]*4C+32AWG*1P+32AWG*4C+23AWG*1C]+2EAB;
 OD: 4.8mm, BRAID:85%, JACKET: LOW SMOKE ZERO HALOGEN, BLACK
- ELECTRICAL TEST:
 (1)- 100% OPEN SHORT & MISS WIRE TEST
 (2)- HIPOT: 100V AC/0.1S
 (3)- INSULATION: 10M OHM MIN. AT 100V DC
 (4)- CONDUCTOR RESISTANCE: 3 OHM MAX.

PACKAGING:
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

REV	DRAWING NUMBER:	SCALE: INTS	SHEET 1 OF 1
A	MUS3A00060		

REV	DRAWING NUMBER:	SCALE: INTS	SHEET 1 OF 1
A	MUS3A00060		

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
OVERALL CABLE LENGTH TOLERANCE: >10 [252] = ±.1 [2.5] / .0 >10 [252] <100 [2540] = ±.1 [2.5] / .0 >100 [2540] <500 [12700] = ±.1 [2.5] / .0 >500 [12700] = ±.5% / .0	CHUAN	05/10/2019
ALL OTHER DIMENSIONAL TOLERANCES: .XX = ±.005 [0.125] .XXX = ±.002 [0.051]	DRIHELLO	05/11/2019
	DGUITADAUR	05/11/2019
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

MILESTEK CORPORATION
 301 LENOVALE DRIVE, SUITE 100
 FARMINGTON, CT 06031
 PHONE: (949) 484-9400
 FAX: (949) 564-1047

TITLE
 USB 3.1 LSZH Type C Gen 2 M/M
 10Gbps

CAGE CODE: 4Z977

CUSTOMER REFERENCE DOCUMENT:

REGULATORY COMPLIANCE:
 EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

PACKAGING:
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.