




8 7 6 5 4 3 2 1

PROPRIETARY NOTICE
 This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

| REV | REVISIONS | | |
|-----|-----------------|---------|-------------|
| | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 5/26/17 | D.FRISIELLO |
| | | | |
| | | | |
| | | | |

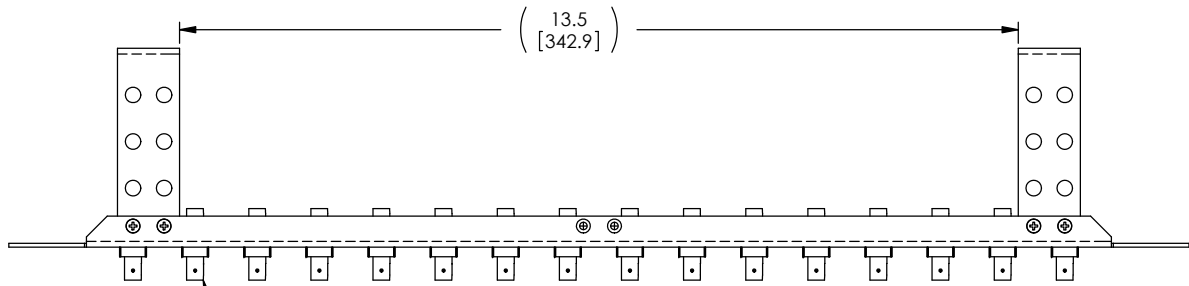

32X, ST-ST COUPLER
(CERAMIC SLEEVE)

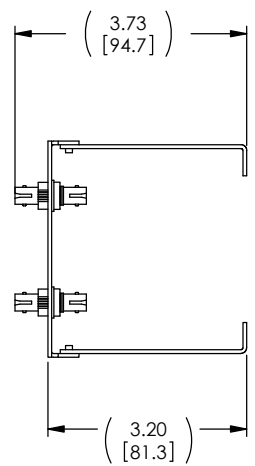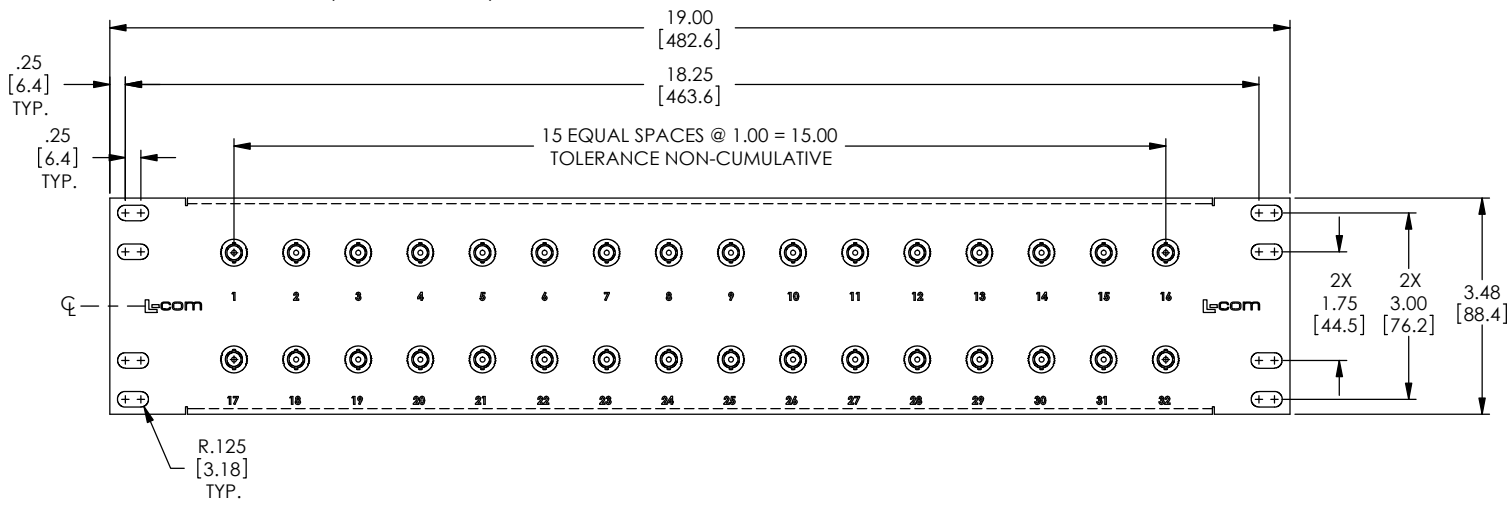

- NOTES:**
1. MATERIAL: .06 THICK COLD ROLLED STEEL.
 2. PANEL FINISH: FLAT BLACK POWDER COAT.
 3. SILKSCREEN COLOR: WHITE.
 4. PANEL ASSEMBLY SHALL BE PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054.
 5. PANEL ASSEMBLY IS SHIPPED WITH DUST CAPS INSTALLED. (NOT SHOWN)

REGULATORY COMPLIANCE:
 CE2011/65/EU(ROHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

| AS9100C CERTIFIED | | CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY | |
|---|-------------|---|---------------------------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES | SIGNATURE | DATE | |
| OVERALL: CABLE LENGTH TOLERANCE: >12 (305) = +1 (25) / -0 >12 (305) AND 1 (25.4) = +0.015 (-0) >40 (1024) (120 (3048)) = +4 (102) / -0 >120 (3048) >300 (7620) = +0.015 (-0) >300 (7620) = +5% / -0% | D.FRISIELLO | 5/26/17 | |
| ALL OTHER DIMENSIONAL TOLERANCES: XX = ± 0.008 XXX = ± 0.013 XXXX = ± 0.013 | DATE | 5/26/17 | TITLE |
| DASH NEXT ASSY USED ON CUSTOMER REFERENCE DOCUMENT | APPLICATION | CAGE CODE: 42977 | 2U RACK PNL W/32 ST SM CPLR+CMB |
| | | | DRAWING NUMBER: REF00067 |
| | | | SCALE: NIS |
| | | | SHEET 1 OF 1 |

8 7 6 5 4 3 2 1