
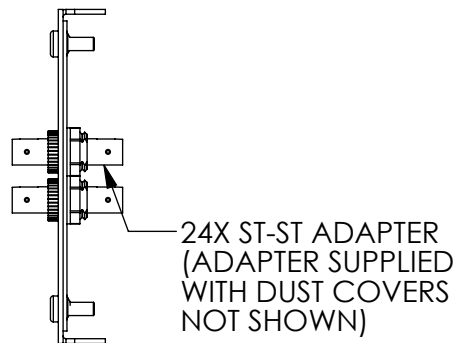


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REF00048	REVISIONS			
	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	5/26/17	R.CLARK

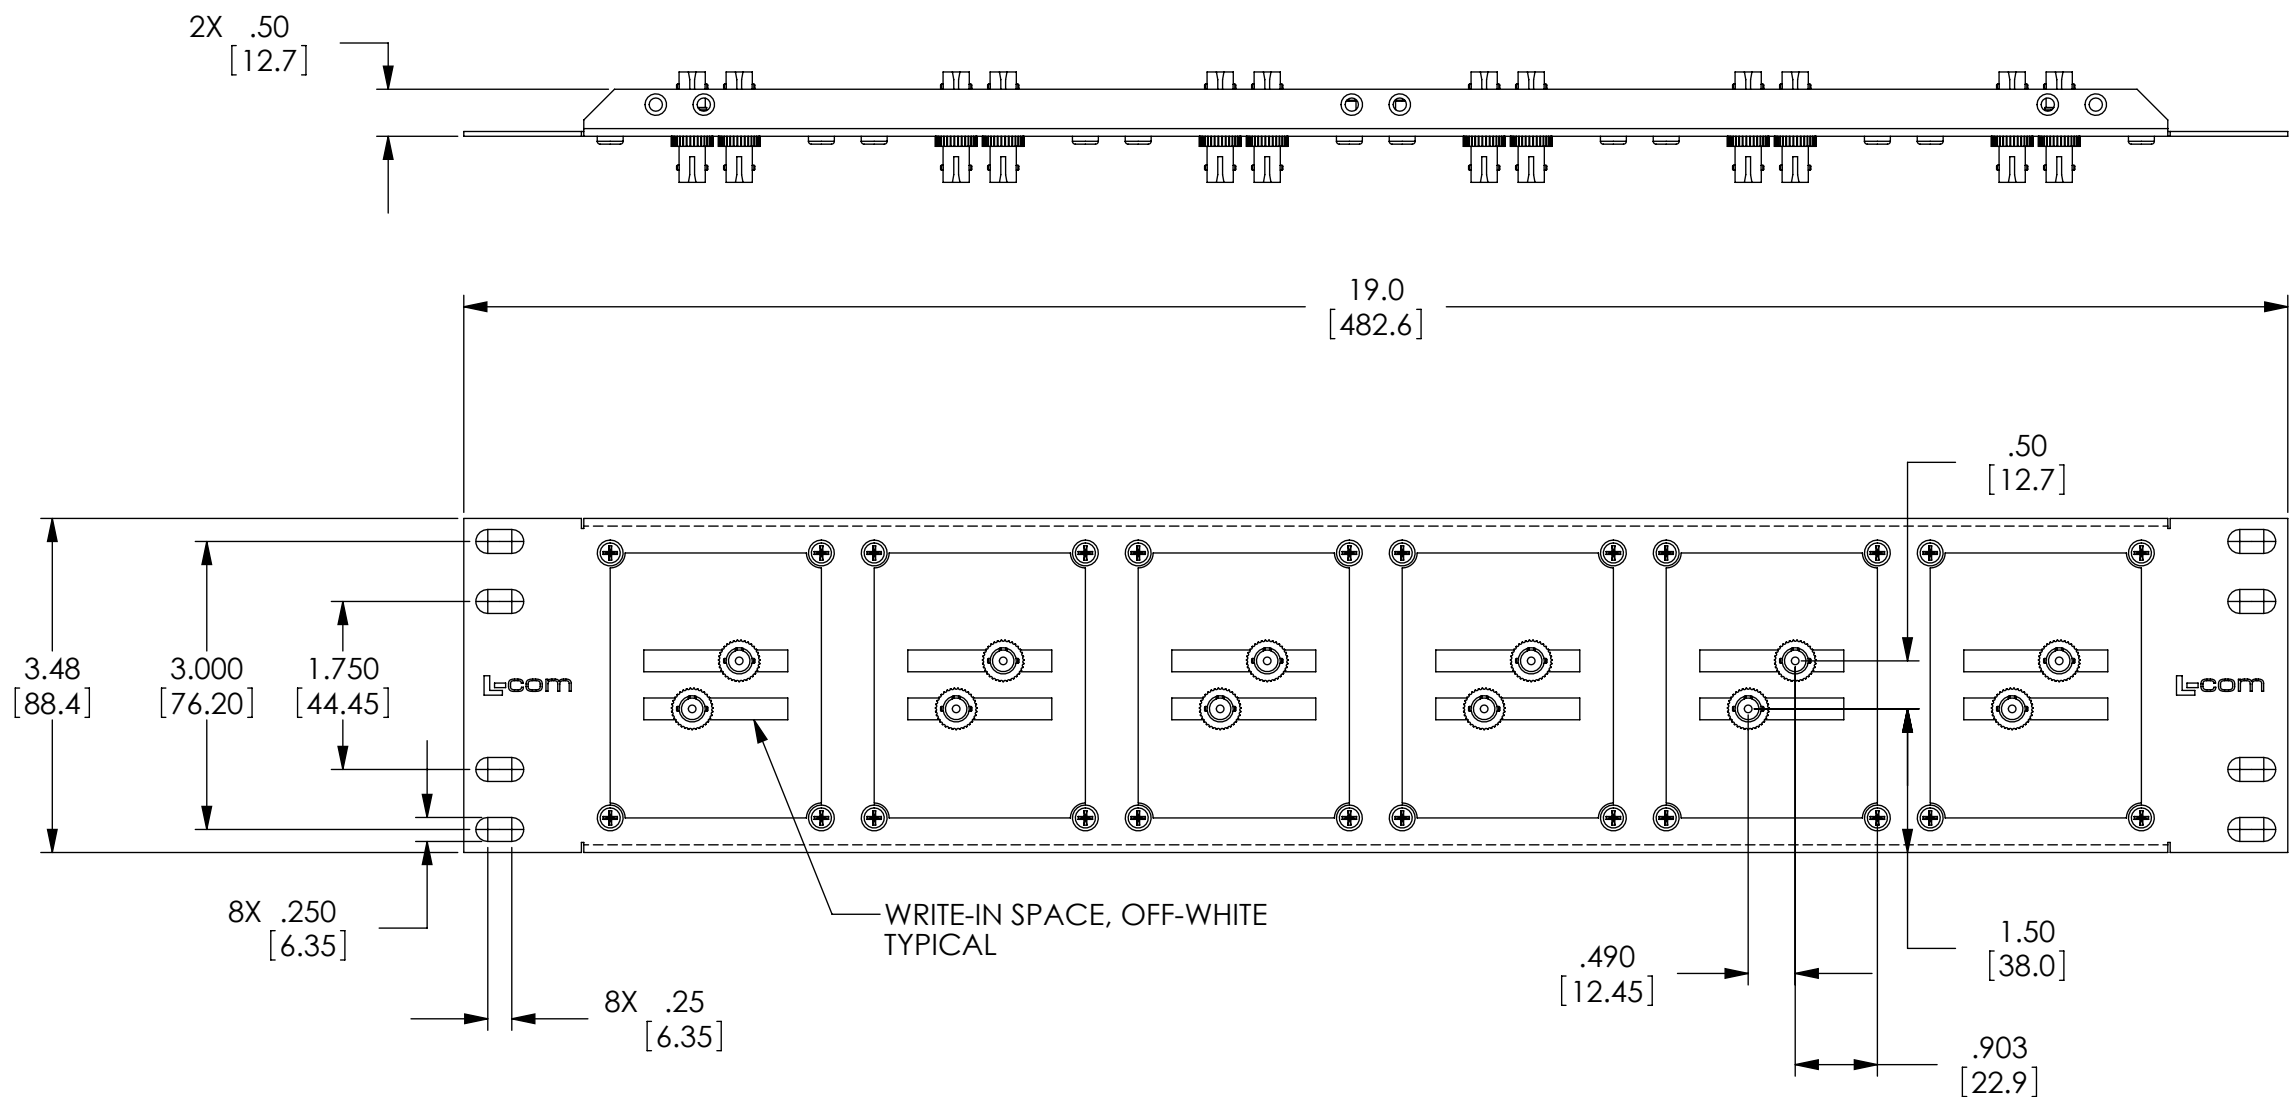


**NOTES:**

1. THIS PANEL ASSEMBLY USES SIX L-COM USP2FOPTB UNIVERSAL SUB-PANELS, EACH HAVING 2 FOA-001 FEED-THROUGH ADAPTERS ACCEPTING ST TYPE FIBER OPTIC CABLE PLUGS.
2. BASIC PANEL IS 16 GAUGE COLD ROLLED STEEL  
PANEL FINISH: FLAT BLACK POWDER COAT
3. SUB-PANELS ARE 16 GAUGE COLD ROLLED STEEL,  
PANEL FINISH: FLAT BLACK POWDER COAT.
4. PANEL SHALL BE PACKAGED PER SPECIFICATION PKG-0054

REGULATORY COMPLIANCE:  
CE2011/65/EU(ROHS DIRECTIVE)

**NON CONTROLLED DRAWING IF PRINTED**

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY									
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SIGNATURE		DATE				MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENVER, TX 76207 PHONE: 866.524.1553 FAX: 480.591.7086	
			OVERALL CABLE LENGTH TOLERANCE: ±12 [305] = ±1 [25] / 0 +12 [305] ≤60 [1524] = +2 [51] / 0 +40 [1024] ≤120 [3048] = +4 [102] / 0 +120 [3048] ≤300 [7620] = +6 [152] / 0 +300 [7620] = +5% / -0%		DRAWN BY: R. CLARK		5/26/17					
			ALL OTHER DIMENSIONAL TOLERANCES: X = ±.2 [5.08] XX = ±.02 [1.51] XXX = ±.005 [1.3]		CHECKED BY: M. MARTINEZ		5/26/17		TITLE		3.5"X19" PNL/12 ST SMX CPL BLK	
					APPROVED FOR ENGINEERING: M. MARTINEZ		5/26/17					
					APPROVED MANUFACTURING:							
					CUSTOMER APPROVAL							
DASH NEXT ASSY USED ON			CUSTOMER REFERENCE DOCUMENT:			CAGE CODE: 4Z977		SIZE		DRAWING NUMBER:		
APPLICATION								B		REF00068		
								SCALE: NTS		SHEET 1 OF 1		