




PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	02/23/18	JLABOY



NEMA 5/15

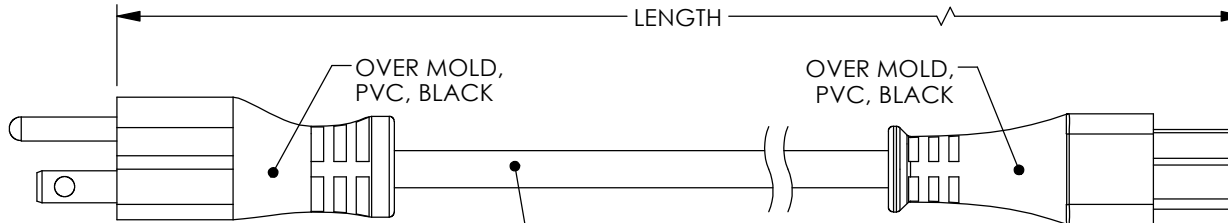

EN60320 C13

(UL) SJE 16AWG x 3 CONDUCTOR
JACKET: LOW SMOKE ZERO HALOGEN, BLACK

MODEL NUMBER	LENGTH METERS [FEET]
REF00144	3.0 [9.84]

Detachable Power Supply Cord
P/N: REF00144
UL File#E234956
PLUG: 738 / CONNECTOR: 544
Cable type: SJE3X16AWG 90°C
Rating: 13A/125V
Length: 3 meters/9'10"
Color: Black
Qty: 1


BAG LABEL EXAMPLE

NOTES:

1. RATED 13A/125V.
2. UL LISTED
3. CORD TO BE PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054 IN A CLEAR BAG WITH WHITE LABEL: SEE BAG LABEL EXAMPLE.
4. CENTER THE LABEL ON THE CLEAR BAG.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)
COMPLIES WITH IEC 61034-2 (LOW SMOKE)
COMPLIES WITH EN 14582 (HALOGEN FREE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	 <div>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 846.524.1153 FAX: 940.591.7086</div>
			OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	DRAWN BY: B.PUCHASKI	02/23/18	
			ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [51] XXX = ± .005 [1.3]	CHECKED BY: J.LABOY	02/23/18	
				APPROVED ENGINEERING: M.MARTINEZ	02/23/18	
				APPROVED MANUFACTURING:		TITLE N5/15P-SJE3X16 C13 LSZH BLK
				CUSTOMER APPROVAL		
			</			

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [5.1]
.XXX = ±.005 [13]

CUSTOMER REFERENCE DOCUMENT:

MILESTEK CORPORATION
1506 INTERSTATE 35 WEST
DENTON, TX 76207
PHONE: 866.524.1553
FAX: 940.591.7086