

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS


REV	DESCRIPTION	DATE	APPROVED
INITIAL RELEASE		06/14/17	G.HUAN

D

C

B

A

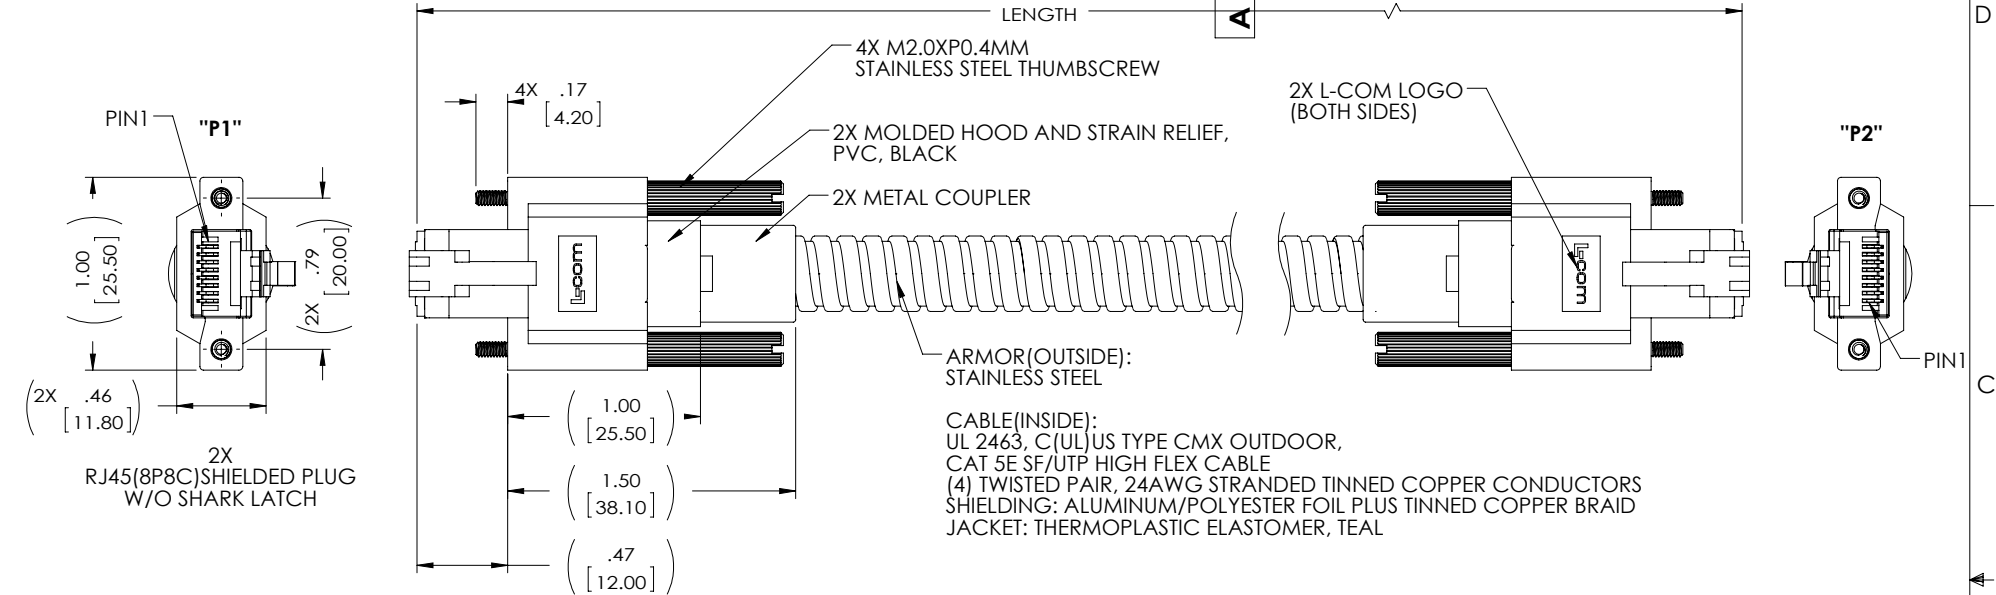

NOTES

MATERIAL:

RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
RJ45 SHIELD/STRAIN RELIEF: BRASS, 100μ" MIN. NICKEL PLATE
RJ45 CONTACTS: PHOSPHOR BRONZE, 50μ" MIN. GOLD PLATE IN CONTACT AREA OVER 100μ" MIN. NICKEL PLATE OVERALL
ARMOR COUPLER: BRASS ,NICKEL PLATE

ELECTRICAL:

NOMINAL VOLTAGE RATING: 125 VAC/VDC
MAX CURRENT: 1.5A

APPLICATION:

METAL ARMOR CRUSH RESISTANCE: 1500 PSI (MIN).

ENVIRONMENTAL:


OPERATING TEMPERATURE RANGE: -10°C TO +60°C
CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT

MISCELLANEOUS

CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

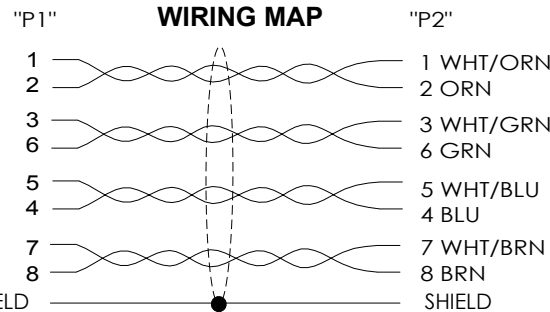

PART NUMBER	LENGTH	
	FEET	METERS
T5A00004-1M	3.28	1.0
T5A00004-2M	6.56	2.0
T5A00004-3M	9.84	3.0
T5A00004-5M	16.41	5.0
T5A00004-10M	32.8	10.0

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	<p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: G.HUAN	06/14/17		
			CHECKED BY: D. GUITTADAURO	06/15/17	<p>TITLE C5E GigE-GigE TPE 24 MTL</p>	
			APPROVED ENGINEERING: S.PAN	06/15/17		
			APPROVED MANUFACTURING:		<p>SIZE A</p> <p>DRAWING NUMBER: T5A00004</p>	
			CUSTOMER APPROVAL			
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	
APPLICATION					SCALE: NTS	SHEET 1 OF 1

A