
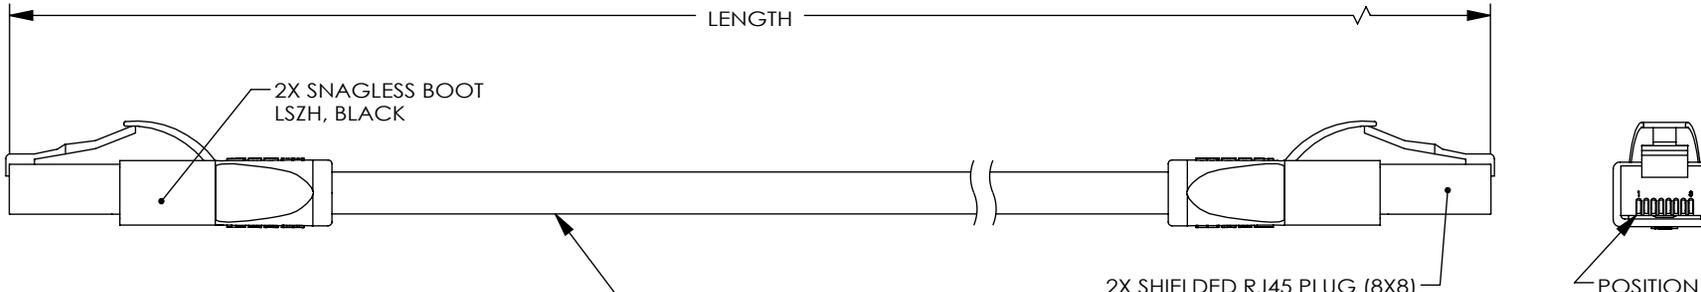


8 7 6 5 4 3 2 1

PROPRIETARY NOTICE


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	06/08/17	G.HUAN



SHIELDED, FOUR TWISTED PAIR, CAT 5E MODULAR CABLE  
 CONDUCTORS: 26 AWG STRANDED COPPER  
 SHIELDING: ALUMINUM/ POLYESTER.  
 JACKET: LOW SMOKE ZERO HALOGEN, BLACK

PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
T5A00008-1F	1.0	.31	T5A00008-50F	50.0	15.24
T5A00008-2F	2.0	.61	T5A00008-60F	60.0	18.29
T5A00008-3F	3.0	.91	T5A00008-75F	75.0	22.86
T5A00008-5F	5.0	1.52	T5A00008-80F	80.0	24.38
T5A00008-7F	7.0	2.13	T5A00008-90F	90.0	27.43
T5A00008-10F	10.0	3.05	T5A00008-100F	100.0	30.48
T5A00008-15F	15.0	4.57	T5A00008-150F	150.0	45.72
T5A00008-20F	20.0	6.10	T5A00008-200F	200.0	60.96
T5A00008-25F	25.0	7.62	T5A00008-250F	250.0	76.20
T5A00008-30F	30.0	9.14	T5A00008-300F	300.0	91.44
T5A00008-40F	40.0	12.19			

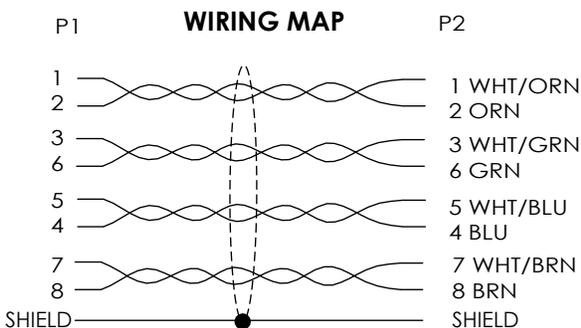

NOTES:

1. PLUG CONFORMS TO TIA-1096.
2. OPERATING TEMPERATURE RANGE: -20°C TO +60°C.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
5. REGULATORY COMPLIANCE: CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES			SIGNATURE	DATE	MilesTek Military   Aerospace   Communications   Industrial	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%			DRAWN BY: G.HUAN	06/08/17	MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]			CHECKED BY: D. GUITTAURO	06/08/17	TITLE CBL RJ45 CAT5E SHLD LSZH	
CUSTOMER REFERENCE DOCUMENT:			APPROVED ENGINEERING: S.PAN	06/08/17	DRAWING NUMBER: T5A00008	
APPLICATION			CUSTOMER APPROVAL		SCALE: NTS	
DASH NEXT ASSY USED ON			CAGE CODE: 42977	SHEET 1 OF 1		

8 7 6 5 4 3 2 1