
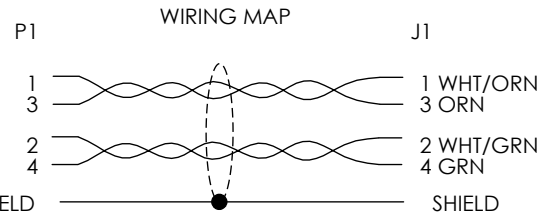


# PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/08/17	G.HUAN

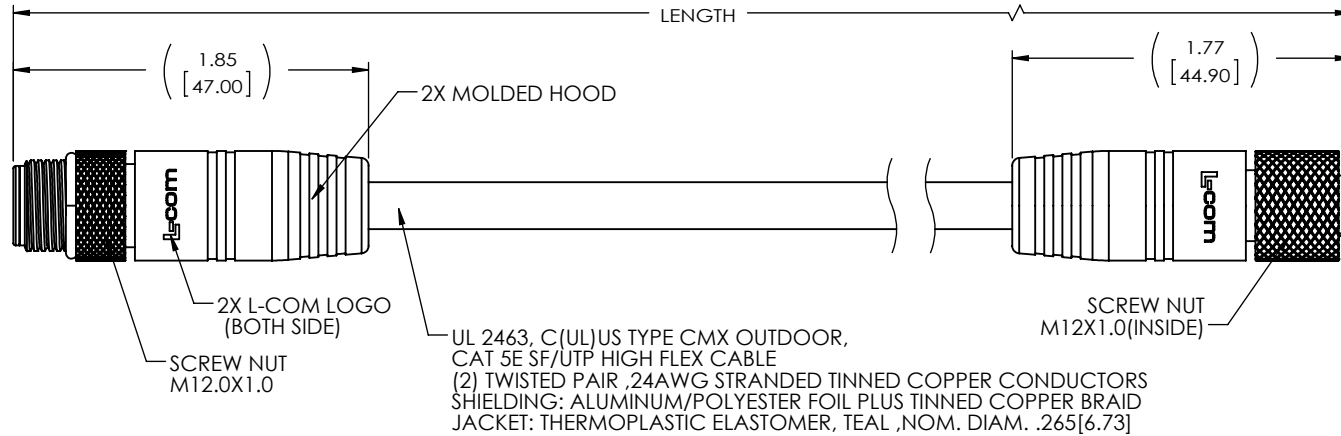

PART NUMBER	LENGTH	
	FEET	METERS
T5A00011-05M	1.64	0.5
T5A00011-1M	3.28	1.0
T5A00011-2M	6.56	2.0
T5A00011-3M	9.84	3.0
T5A00011-5M	16.41	5.0
T5A00011-10M	32.82	10.0

## NOTES

**MATERIAL:**  
MOLDED HOOD: THERMOPLASTIC POLYURETHANE, BLACK  
INSULATOR: NYLON, BLACK  
SHELL/SCREW NUT: BRASS, NICKEL PLATE  
CONTACTS: PHOSPHOR BRONZE, 15μ" MIN. GOLD PLATE

**ELECTRICAL:**  
NOMINAL VOLTAGE RATING: 250 VAC/VDC  
MAX CURRENT: 4A

**APPLICATION:**  
INGRESS PROTECTION RATING IS IP68 (MATED).

**ENVIRONMENTAL:**  
OPERATING TEMPERATURE RANGE: -40°C TO +80°C  
CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT

**MISCELLANEOUS**  
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY  
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

## NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE		
			DRAWN BY: G.HUAN	06/08/17		
			CHECKED BY: D. GUITADAURO	06/09/17	<b>TITLE</b> C5E M12D M/F TPE 24 TEL	
			APPROVED ENGINEERING: S.PAN	06/09/17		
			APPROVED MANUFACTURING:		<b>SIZE</b> A	
			CUSTOMER APPROVAL			
			CAGE CODE: 42977		<b>DRAWING NUMBER:</b> T5A00011	
					<b>SCALE:</b> NTS	
					<b>SHEET</b> 1 OF 1	