


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/09/17	G.HUAN

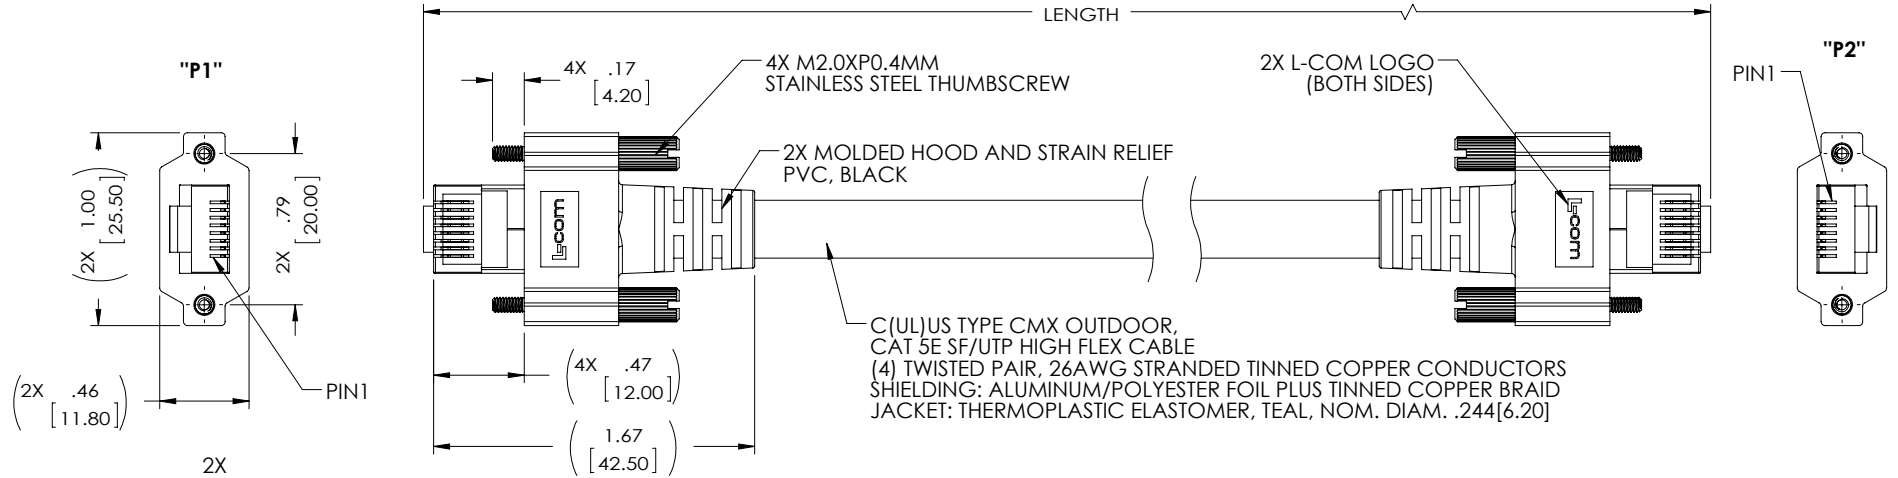

NOTES

MATERIAL:
 RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
 RJ45 SHIELD/STRAIN RELIEF: BRASS, 100μ" MIN. NICKEL PLATE
 RJ45 CONTACTS: PHOSPHOR BRONZE (QSN4-3), 50μ" MIN.
 GOLD PLATE IN CONTACT AREA OVER 100μ" MIN.
 NICKEL PLATE OVERALL


ELECTRICAL:
 NOMINAL VOLTAGE RATING: 125 VAC/VDC
 MAX CURRENT: 1.5A

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C
 CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD
 SPLATTER RESISTANT

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

WIRING MAP

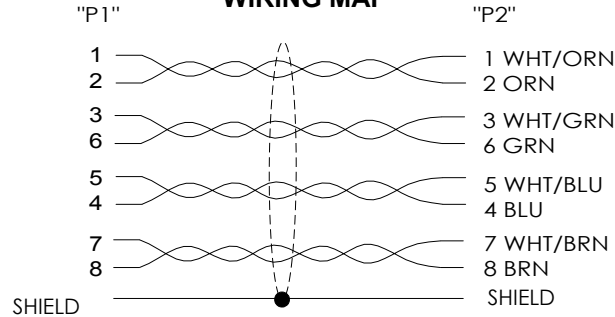

PART NUMBER	LENGTH	
	FEET	METERS
T5A00016-1M	3.28	1.0
T5A00016-2M	6.56	2.0
T5A00016-3M	9.84	3.0
T5A00016-5M	16.41	5.0
T5A00016-10M	32.82	10.0

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE		
			DRAWN BY: G.HUAN	06/09/17		
			CHECKED BY: D. GUITADAURO	06/09/17	TITLE C5E GigE-GigE TPE 26 TEL	
			APPROVED ENGINEERING: S.PAN	06/09/17		
			APPROVED MANUFACTURING:		SIZE A	
			CUSTOMER APPROVAL			
			CAGE CODE: 42977		DRAWING NUMBER: T5A00016	
			APPLICATION		SCALE: NTS	
			SHEET 1 OF 1			