


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/31/2019	DFRISIELLO

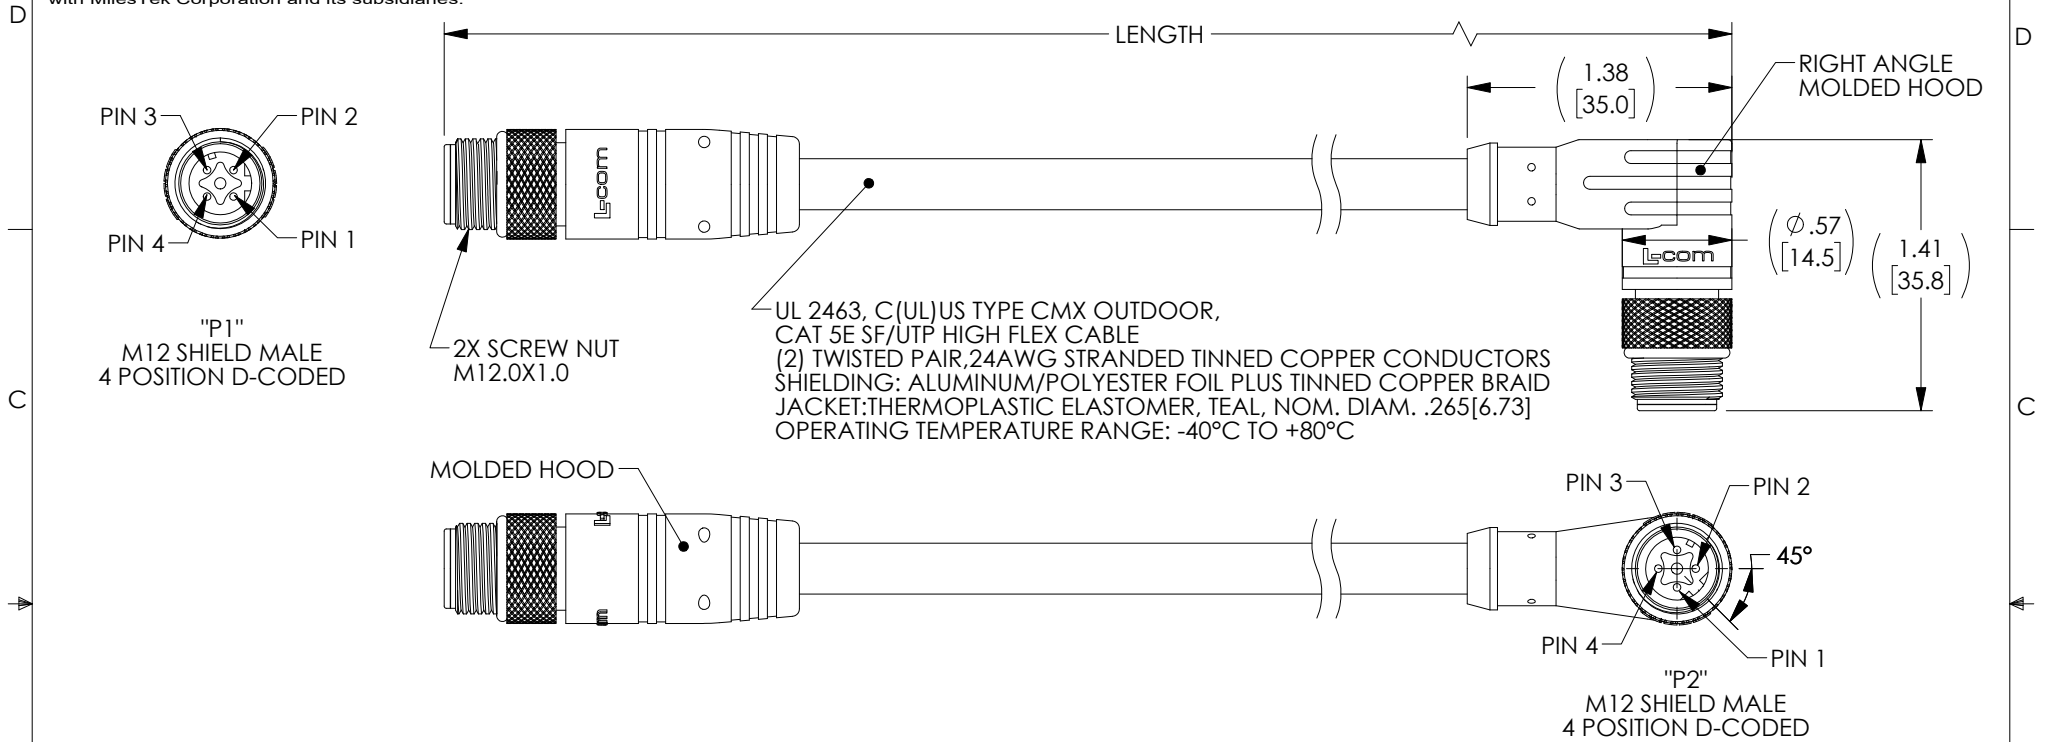

**NOTES**


**MATERIAL:**  
 MOLDED HOOD:THERMOPLASTIC POLYURETHANE, BLACK  
 INSULATOR: NYLON, BLACK  
 SHELL/SCREW NUT: BRASS, NICKEL PLATED  
 CONTACTS: PHOSPHOR BRONZE, .15µ" MIN. GOLD PLATED

**ELECTRICAL:**  
 NOMINAL VOLTAGE RATING: 250 VAC/VDC  
 MAX CURRENT: 4A

**APPLICATION:**  
 INGRESS PROTECTION RATING IS IP67 (WHEN MATED).

**ENVIRONMENTAL:**  
 CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND WELD SPLATTER RESISTANT

**MISCELLANEOUS**  
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY,  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN  
 ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

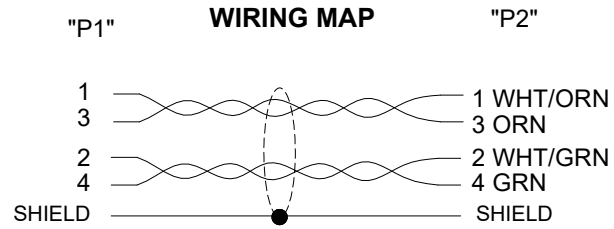

MODEL NUMBER	LENGTH	
	METERS	FEET
T5A00022-05M	0.5	1.64
T5A00022-1M	1.0	3.28
T5A00022-2M	2.0	6.56
T5A00022-3M	3.0	9.84
T5A00022-5M	5.0	16.41
T5A00022-10M	10.0	32.81
T5A00022-15M	15.0	49.22

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± 2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	SIGNATURE	DATE	MILESTEK CORPORATION 301 LEORA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047
	DRAWN BY: DFRISIELLO	05/29/2019	
	CHECKED BY: DGUTTADAUR	05/31/2019	
	APPROVED BY: DGUTTADAUR	05/31/2019	
CUSTOMER REFERENCE DOCUMENT:	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		TITLE C5E M12D RAM/M TPE 24 TEL
CAGE CODE: 4Z977	SCALE: NTS	DRAWING NUMBER: T5A00022	REV. A
			SHEET 1 OF 1