


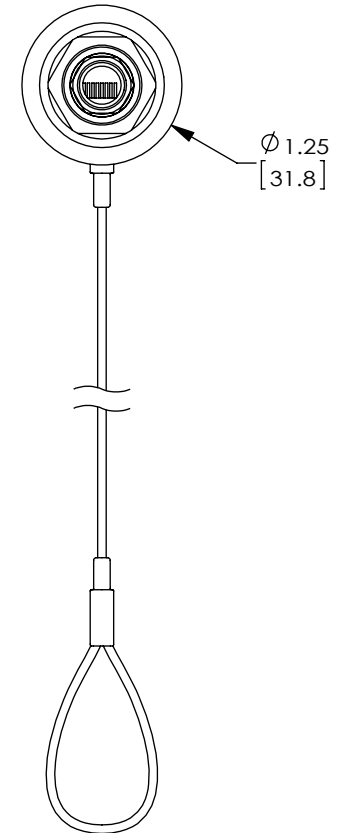


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

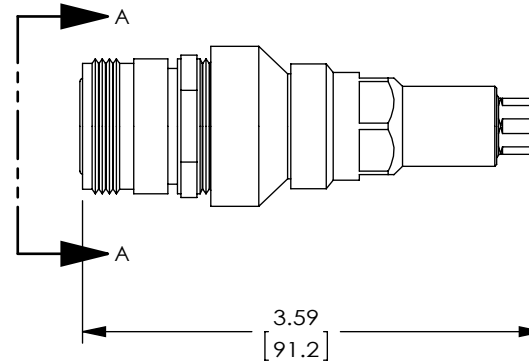

SECTION A-A
SCALE 1 : 1.5

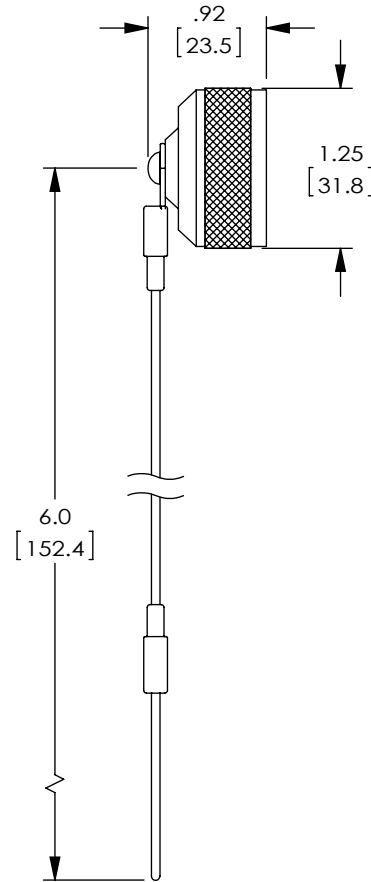


NOTES:

- CABLE RANGE: $\varnothing .19$ TO $\varnothing .27$
ASSEMBLED OVERALL LENGTH IS APPROX. 4.06".
- MATERIAL:
CONNECTOR: ALUMINUM/ZINC-NICKEL.
HARDWARE: STAINLESS STEEL.
SEALS: SILICONE/NITRILE.
LANYARD: STAINLESS STEEL (NYLON COATED).
- RATED: IP-68
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
- REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE		G.HUAN

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: .512 [305] + .125 / -0 >12 [305] .560 [1524] = +2 [51] / -0 >60 [1524] .5120 [3048] = +4 [102] / -0 >120 [3048] <300 [7620] = +4 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [1.51] XXX = ±.0002 [1.3]	SIGNATURE	DATE	 MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 846.524.1553 FAX: 940.591.7086
				DRAWN BY: G.HUAN	06/12/17	
				CHECKED BY: D. GUITADAURO	06/13/17	
				APPROVED ENGINEERING: S.PAN	06/13/17	
				APPROVED MANUFACTURING:		
			CUSTOMER APPROVAL			TITLE RCP SHLD SEALED ZNNI .190-.270DC
					SIZE	DRAWING NUMBER: T5B00001
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	A	SCALE: NTS
APPLICATION						SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = ± 1 [25] / -0
 > 12 [305] ≤ 60 [1524] = ± 2 [51] / -0
 > 60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
 > 120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
 > 300 [7620] = $\pm 5\%$ / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
 $X = \pm .2$ [5.08]
 $.XX = \pm .02$ [1.51]
 $.XXX = \pm .005$ [1.3]

CUSTOMER REFERENCE DOCUMENT: