
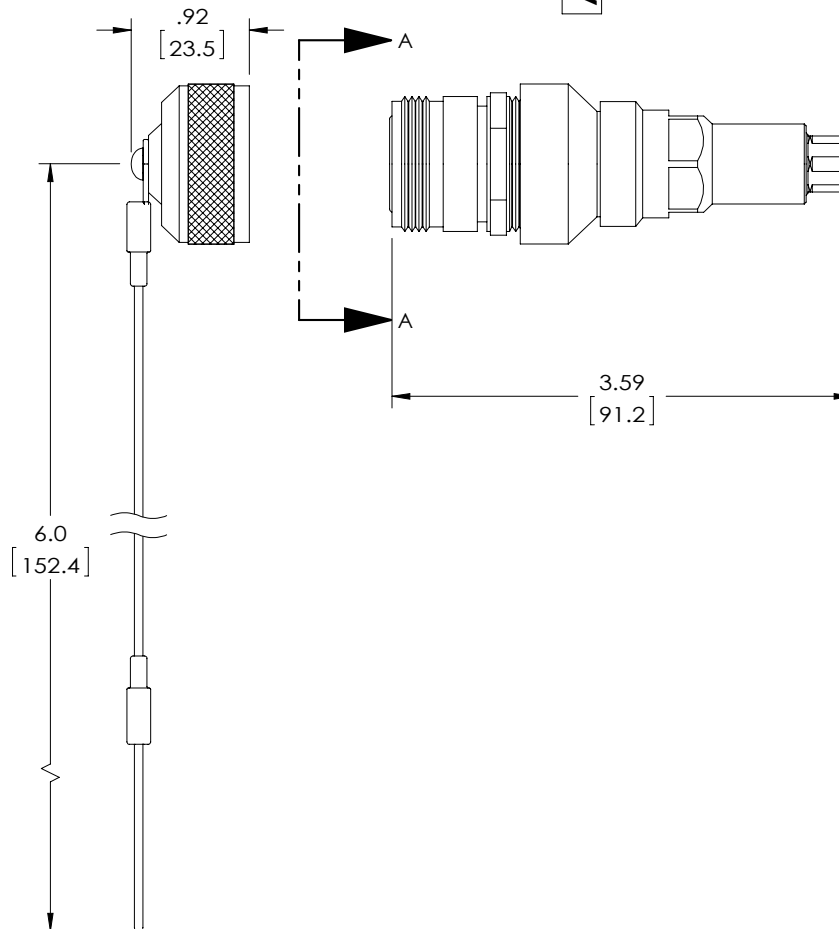


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

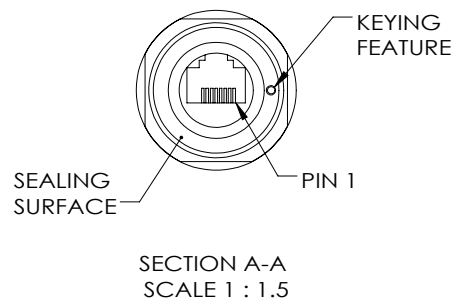

NOTES:

- CABLE RANGE: $\varnothing .271$ TO $\varnothing .330$
ASSEMBLED OVERALL LENGTH IS APPROX. 4.06".
- MATERIAL:
CONNECTOR: ALUMINUM/BLACK ANODIZE.
HARDWARE: STAINLESS STEEL.
SEALS: SILICONE/NITRILE.
LANYARD: STAINLESS STEEL (NYLON COATED).
- RATED IP-68
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
- REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

T5B00004
A

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/08/17	G.HUAN

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5.08] .XX = $\pm .02$ [1.51] .XXX = $\pm .005$ [1.3]			SIGNATURE		DATE	
			DRAWN BY: G.HUAN		06/08/17	
			CHECKED BY: D. GUITADAURO		06/08/17	
			APPROVED ENGINEERING: S.PAN		06/08/17	
			APPROVED MANUFACTURING:			
DASH			NEXT ASSY		USED ON	
APPLICATION			CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	
			MilesTek		MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	
			TITLE		RCP SEALED ANOD .271-.330 DCAP	
			SIZE		DRAWING NUMBER:	
			A		T5B00004	
			SCALE: NTS		SHEET 1 OF 1	