


PROPRIETARY NOTICE


This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

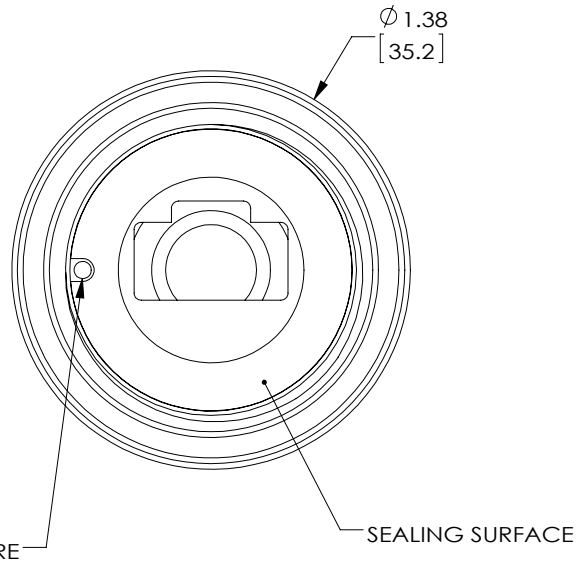


NOTES:

1. CABLE SIZE: .190 / .270"
2. MATERIALS AND FINISH:
EXTERNAL PARTS: ALUMINUM/ZINC-NICKEL
INTERNAL PARTS: ALUMINUM
MISC. HARDWARE: STAINLESS STEEL
SEAL: SILICONE
3. RATING: IP-68
4. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
5. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
6. REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/09/17	G.HUAN

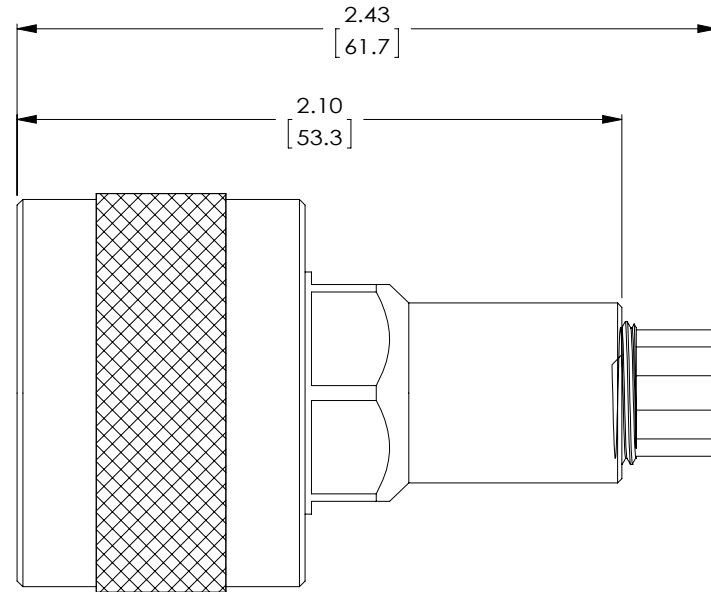

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	<div><div>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</div></div>	
			OVERALL CABLE LENGTH TOLERANCE: .512 [305] + .125 / - 0 >12 [305] .560 [1524] = +2 [51] / - 0 >.60 [1524] .5120 [3048] = +4 [102] / - 0 >.120 [3048] .520 [7620] = +4 [152] / - 0 >.300 [7620] = +5% / -0%	DRAWN BY: G.HUAN	06/09/17		
			ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY: D. GUITTADAURO	06/09/17		
				APPROVED ENGINEERING: S.PAN	06/09/17		
				APPROVED MANUFACTURING:			
				CUSTOMER APPROVAL		TITLE PLUG ZNNI .190-.270	
						SIZE A	DRAWING NUMBER: T5B00011
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977		SCALE: NTS	SHEET 1 OF 1
APPLICATION							

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [1.51]
.XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: