

# PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

## REVISONS

REV	DESCRIPTION	DATE	APPROVED
INITIAL RELEASE		06/13/17	G.HUAN

D

D

C


C

B

B

A

A

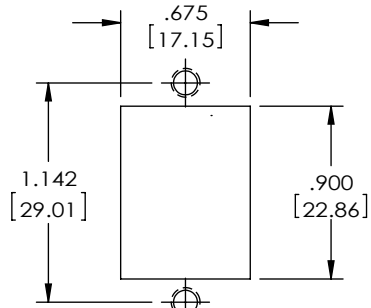

RECOMMENDED  
PANEL OPENING

2X #4-40 UNC-2B THRU

2X 4-40UNC-2A  
X 1/4" LONG



## NOTES:

### MATERIAL:

FLANGED ADAPTOR: ZINC ALLOY  
HARDWARE: STAINLESS STEEL.

### FINISH:

FLANGED ADAPTOR: NICKEL PLATE.

### MISCELLANEOUS:


CURRENT RATING: 1.5A

### PACKAGING:


KITS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

### REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

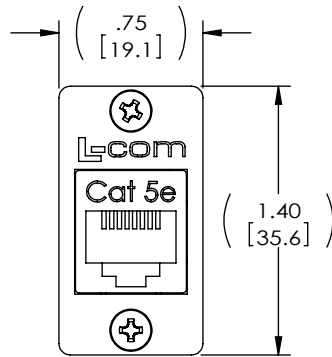

CAT 5E RJ45 KEYSTONE COUPLER  
(L-COM P/N: TDG1026KC5)

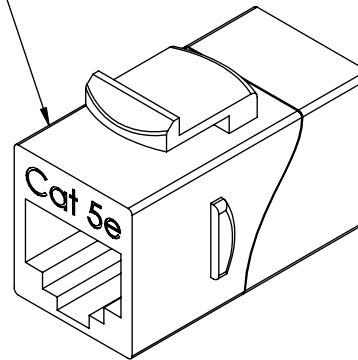

FLANGE MOUNTED KEYSTONE ADAPTOR

**KIT SHOWN FULLY ASSEMBLED FOR CLARITY  
(KIT IS SHIPPED UN-ASSEMBLED)**

KIT INCLUDES:

- 1- COUPLER
- 1- FLANGE ADAPTOR
- 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

## NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	<p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: G.HUAN	06/13/17		
			CHECKED BY: D. GUITADAURO	06/14/17	TITLE CAT 5E RJ45 PNL CPLR KIT	
			APPROVED ENGINEERING: S.PAN	06/14/17		
			APPROVED MANUFACTURING:		DRAWING NUMBER: T5C00001	
			CUSTOMER APPROVAL			
			CAGE CODE: 42977		SCALE: NTS	SHEET 1 OF 1
DASH	NEXT ASSY	USED ON	APPLICATION			

UNLESS OTHERWISE SPECIFIED ALL  
DIMENSIONS ARE IN INCHES  
  
OVERALL CABLE LENGTH TOLERANCE:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤60 [1524] = +2 [51] / -0  
>60 [1524] ≤120 [3048] = +4 [102] / -0  
>120 [3048] ≤300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0%  
  
ALL OTHER DIMENSIONAL TOLERANCES:  
.X = ±.2 [5.08]  
.XX = ±.02 [1.51]  
.XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: