


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

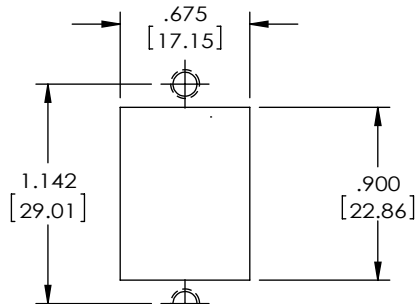

2X #4-40 UNC-2B THRU

**RECOMMENDED
PANEL OPENING**

2X 4-40UNC-2A
X 1/4" LONG



NOTES:

MATERIAL:

FLANGED ADAPTOR: ZINC ALLOY
HARDWARE: STAINLESS STEEL.

FINISH:

FLANGED ADAPTOR: NICKEL PLATE.

MISCELLANEOUS:


CURRENT RATING: 1.5A

PACKAGING:


KITS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

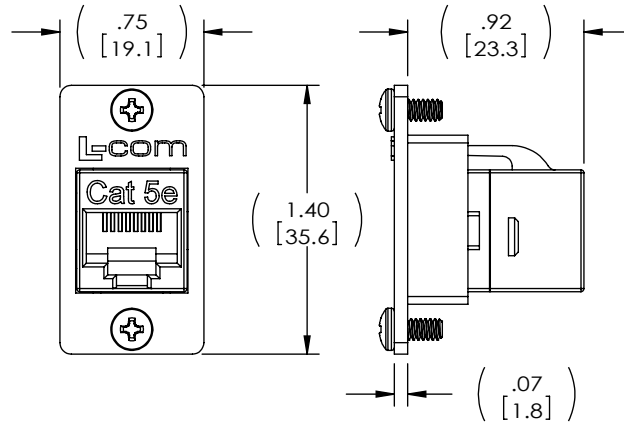


MINI CAT 5E RJ45 KEYSTONE COUPLER
(L-COM P/N: TDG1026KC5-MINI)



FLANGE MOUNTED KEYSTONE ADAPTOR

T5C00003
A

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
INITIAL RELEASE		06/13/17	G.HUAN

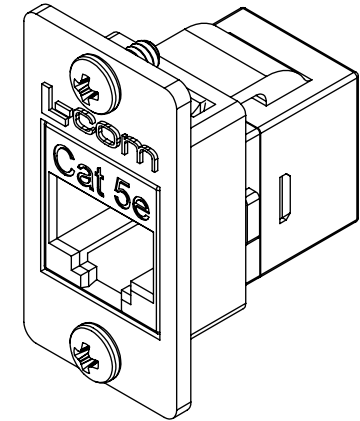

**KIT SHOWN FULLY ASSEMBLED FOR CLARITY
(KIT IS SHIPPED UN-ASSEMBLED)**

KIT INCLUDES:

- 1- COUPLER
- 1- FLANGE ADAPTOR
- 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	MilesTek <small>Military Aerospace Communications Industrial</small>	
			DRAWN BY: G.HUAN	06/13/17		
			CHECKED BY: D. GUITADAURO	06/14/17	MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	
			APPROVED ENGINEERING: S.PAN	06/14/17		
			APPROVED MANUFACTURING:		TITLE C5E RJ45 PNL MINI CPLR KIT	
			CUSTOMER APPROVAL			
			CAGE CODE: 4Z977		SIZE A	DRAWING NUMBER: T5C00003
					SCALE: NTS	SHEET 1 OF 1
DASH	NEXT ASSY	USED ON	APPLICATION			

UNLESS OTHERWISE SPECIFIED ALL
DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤60 [1524] = +2 [51] / -0
 >60 [1524] ≤120 [3048] = +4 [102] / -0
 >120 [3048] ≤300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
 .X = ±.2 [5.08]
 .XX = ±.02 [1.51]
 .XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: