
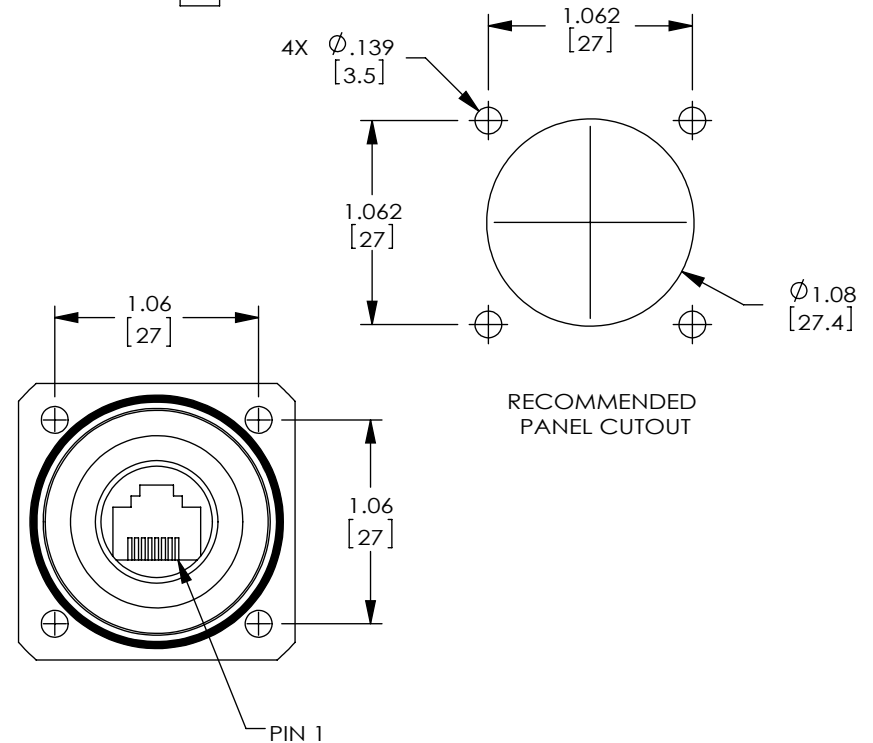


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

T5C00006
A

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/08/17	G.HUAN

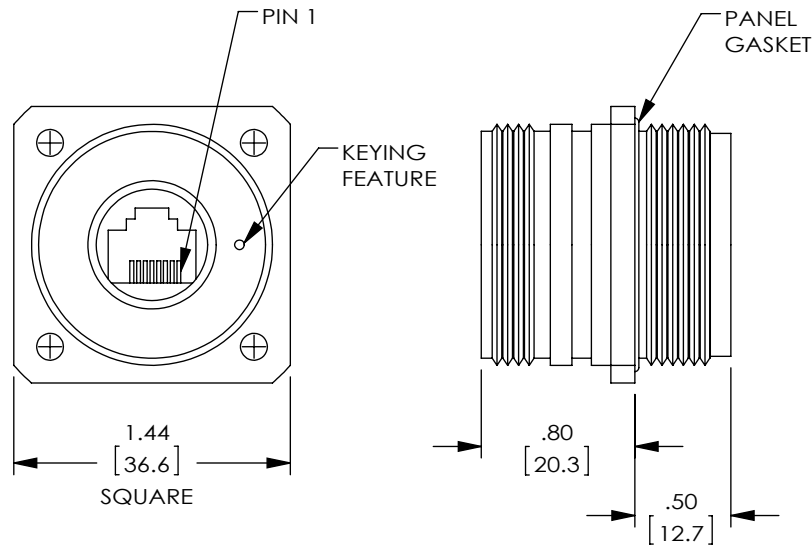

NOTES:

- MATERIAL:
EXTERNAL PARTS: ALUMINUM/BLACK ANODIZE
INTERNAL PARTS: ALUMINUM
MISC: MOUNTING HARDWARE NOT INCLUDED.
RATED: IP-68
SEALS: SILICONE/NITRILE
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: SIZ [305] +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +4 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] XXX = ±.005 [1.3]	SIGNATURE	DATE	<div>MilesTek</div> <div>Military / Aerospace / Communications / Industrial</div> <div>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 846.524.1553 FAX: 940.591.7086</div>
				DRAWN BY: G.HUAN	06/08/17	
				CHECKED BY: D. GUITTADAURO	06/08/17	
				APPROVED ENGINEERING: S.PAN	06/08/17	
				APPROVED MANUFACTURING:		
			CUSTOMER APPROVAL			TITLE FLNG MNT SEALED ANOD
					SIZE	DRAWING NUMBER: T5C00006
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	A	SCALE: NTS
APPLICATION						SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = +1 [25] / -0
 > 12 [305] ≤ 60 [1524] = +2 [51] / -0
 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0
 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0
 > 300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
 $\times = \pm .2$ [5.08]
 $\times \times = \pm .02$ [1.51]
 $\times \times \times = \pm .005$ [1.3]

CUSTOMER REFERENCE DOCUMENT: