


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

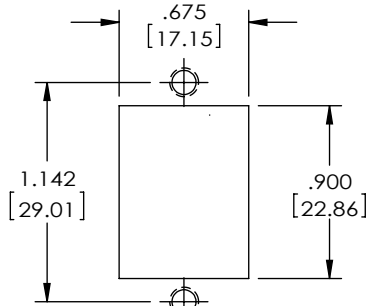

2X #4-40 UNC-2B THRU

RECOMMENDED PANEL OPENING

2X 4-40UNC-2A
X 1/4" LONG



NOTES:

MATERIAL:

FLANGED ADAPTOR: ZINC ALLOY
HARDWARE: STAINLESS STEEL.

FINISH:

FLANGED ADAPTOR: NICKEL PLATE.

MISCELLANEOUS:


CURRENT RATING: 1.5A

PACKAGING:


KITS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:


CE2011/65/EU(RoHS DIRECTIVE)

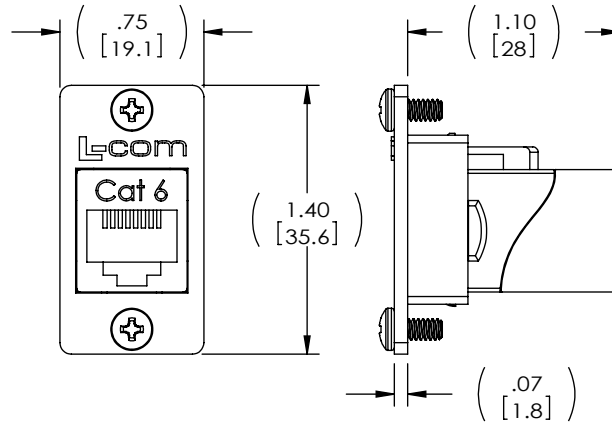

CAT 6 RJ45 KEYSTONE COUPLER
(L-COM P/N: TDG1026KC6)

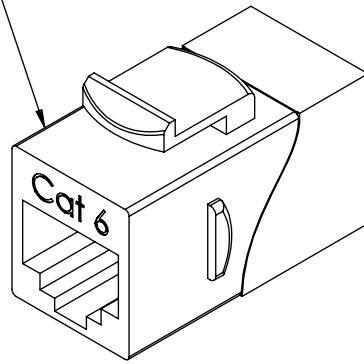


FLANGE MOUNTED KEYSTONE ADAPTOR

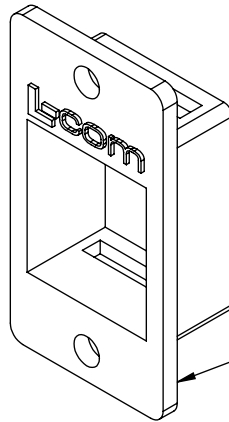

T6C00001
A

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
		06/13/17	G.HUAN

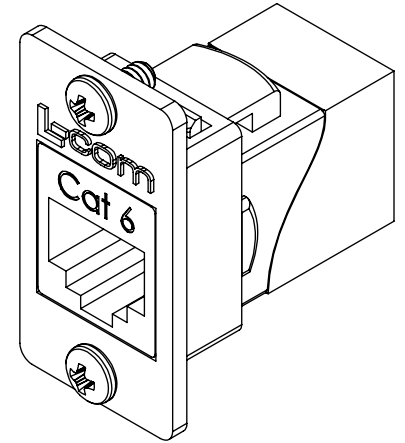

**KIT SHOWN FULLY ASSEMBLED FOR CLARITY
(KIT IS SHIPPED UN-ASSEMBLED)**

KIT INCLUDES:

- 1- COUPLER
- 1- FLANGE ADAPTOR
- 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	<p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: G.HUAN	06/13/17		
			CHECKED BY: D. GUITTADAURO	06/14/17	TITLE CAT 6 RJ45 PNL CPLR KIT	
			APPROVED ENGINEERING: S.PAN	06/14/17		
			APPROVED MANUFACTURING:		SIZE A	
			CUSTOMER APPROVAL			
			CAGE CODE: 42977		DRAWING NUMBER: T6C00001	
			APPLICATION		SCALE: NTS	
			CUSTOMER REFERENCE DOCUMENT:		SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED ALL
DIMENSIONS ARE IN INCHES

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [1.51]
.XXX = ±.005 [1.3]