


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
INITIAL RELEASE		06/13/17	G.HUAN

T6C00004
A

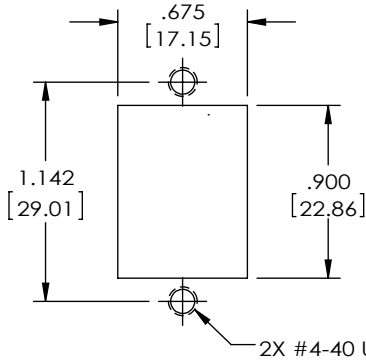

RECOMMENDED PANEL OPENING

2X 4-40UNC-2A
X 1/4" LONG



NOTES:

MATERIAL:

FLANGED ADAPTOR: ZINC ALLOY
HARDWARE: STAINLESS STEEL.

FINISH:

FLANGED ADAPTOR: NICKEL PLATE.

MISCELLANEOUS:


CURRENT RATING: 1.5A

PACKAGING:



KITS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:


CE2011/65/EU(RoHS DIRECTIVE)

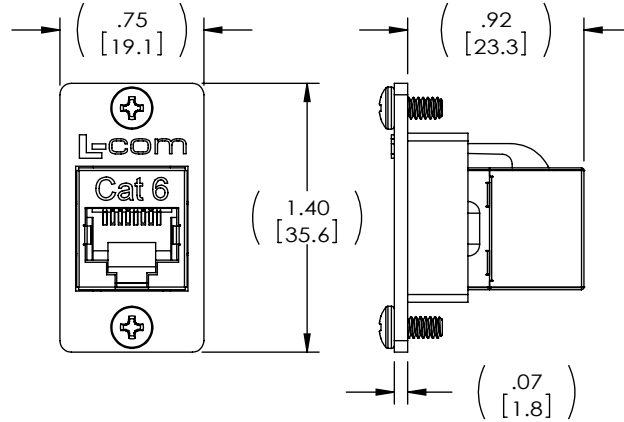

MINI CAT 6 RJ45 KEYSTONE COUPLER
(L-COM P/N: TDG1026KS-C6-MINI)

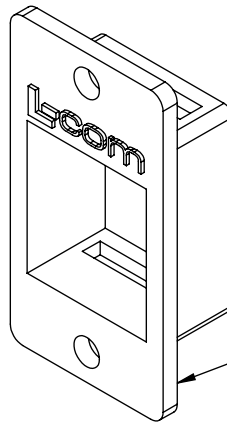

FLANGE MOUNTED KEYSTONE ADAPTOR

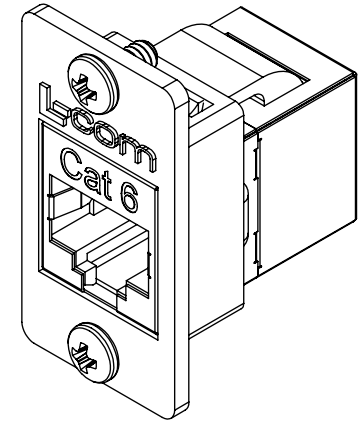


**KIT SHOWN FULLY ASSEMBLED FOR CLARITY
(KIT IS SHIPPED UN-ASSEMBLED)**

KIT INCLUDES:

- 1- COUPLER
- 1- FLANGE ADAPTOR
- 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	 <p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: G.HUAN	06/13/17		
			CHECKED BY: D. GUITADAURO	06/14/17	TITLE C6 SHLD RJ45 PNL MINI CPLR KIT	
			APPROVED ENGINEERING: S.PAN	06/14/17		
			APPROVED MANUFACTURING:		DRAWING NUMBER: T6C00004	
			CUSTOMER APPROVAL			
			CAGE CODE: 42977		SCALE: NTS	SHEET 1 OF 1
DASH	NEXT ASSY	USED ON	APPLICATION			

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [1.51]
.XXX = ±.005 [1.3]

CUSTOMER REFERENCE DOCUMENT: