
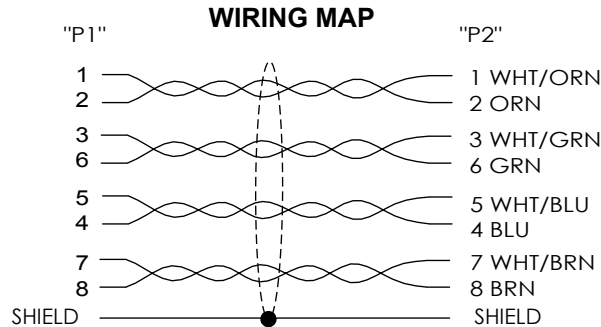


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

TAA00002
A

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/08/17	G.HUAN

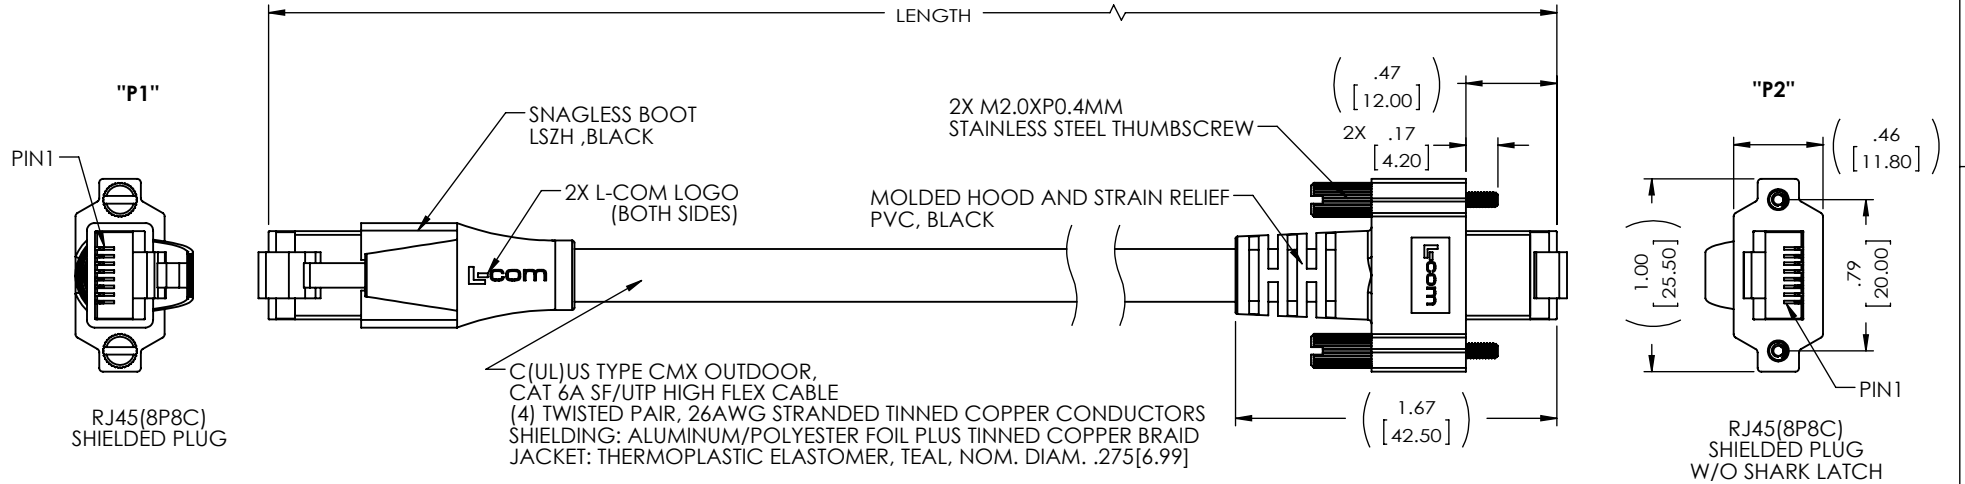

PART NUMBER	LENGTH	
	FEET	METERS
TAA00002-1M	3.28	1.0
TAA00002-2M	6.56	2.0
TAA00002-3M	9.84	3.0
TAA00002-5M	16.41	5.0
TAA00002-10M	32.82	10.0

NOTES

MATERIAL:
RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
RJ45 SHIELD/STRAIN RELIEF: BRASS,NICKEL PLATE
RJ45 CONTACTS: PHOSPHOR BRONZE , 50μ" MIN. GOLD PLATE IN CONTACT AREA , NICKEL PLATE OVERALL

ELECTRICAL:
NOMINAL VOLTAGE RATING: 125 V AC
MAX CURRENT: 1.5A

ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -10°C TO +60°C

MISCELLANEOUS
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	<p>MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086</p>	
			DRAWN BY: G.HUAN	06/08/17		
			CHECKED BY: D. GUITADAURO	06/08/17	<p>TITLE GigE-RJ45 TPE 26 TEL</p>	
			APPROVED ENGINEERING: S.PAN	06/08/17		
			APPROVED MANUFACTURING:		<p>SIZE A</p> <p>DRAWING NUMBER: TAA00002</p>	
			CUSTOMER APPROVAL			
DASH	NEXT ASSY	USED ON	CAGE CODE: 42977		SCALE: NTS	SHEET 1 OF 1
APPLICATION			CUSTOMER REFERENCE DOCUMENT:			

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [1.51]
.XXX = ±.005 [1.3]