
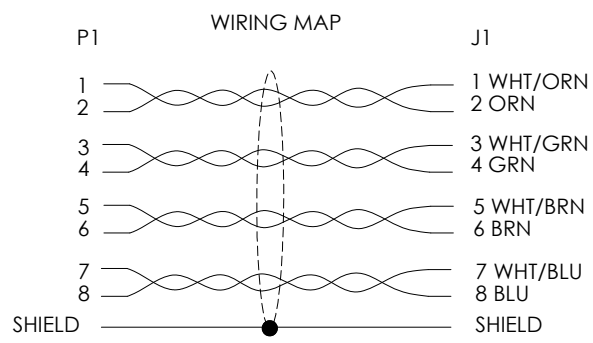
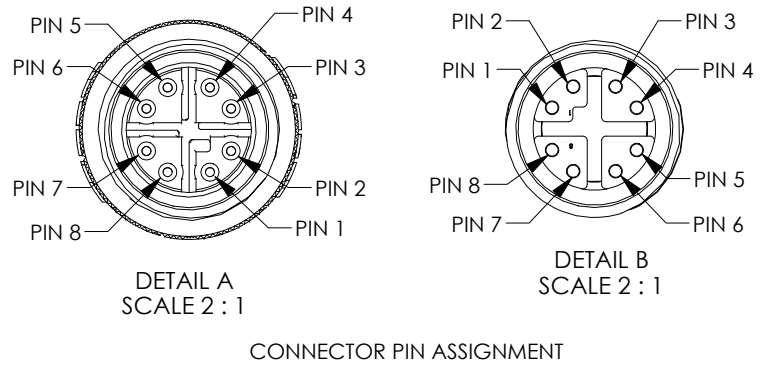


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/31/2019	DFRISIELLO

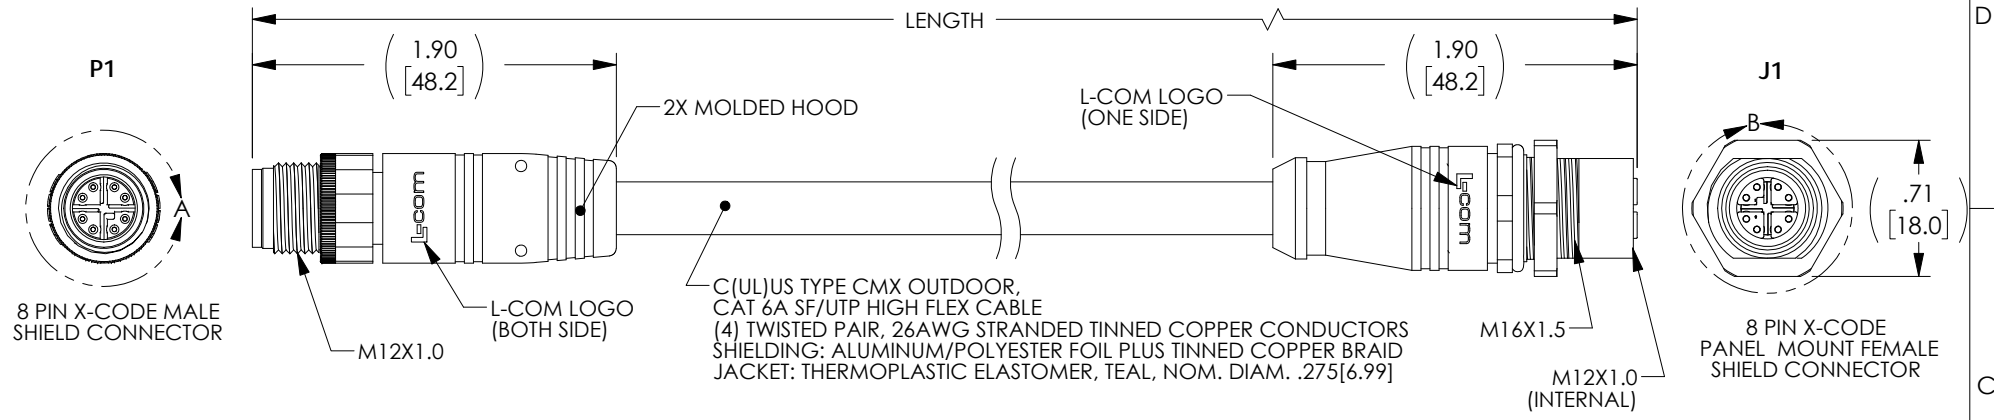

MODEL NUMBER	LENGTH	
	METERS	FEET
TAA00012-05M	0.5	1.64
TAA00012-1M	1.0	3.28
TAA00012-2M	2.0	6.56
TAA00012-3M	3.0	9.84
TAA00012-5M	5.0	16.41
TAA00012-10M	10.0	32.81


NOTES
MATERIAL:
 MOLDED HOOD: THERMOPLASTIC POLYURETHANE, BLACK
 INSULATOR: NYLON, BLACK
 SHELL/SCREW NUT: BRASS, NICKEL PLATE
 CONTACTS: PHOSPHOR BRONZE, 15" MIN. GOLD PLATE
 O-RING: VITON

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 48V AC/DC
 MAX CURRENT: 0.5A

APPLICATION:
 INGRESS PROTECTION RATING IS IP67 (WHEN MATED)

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -40°C TO +75°C

MISCELLANEOUS
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY
 WIRED TO IEC 61076-2-109 STANDARDS
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

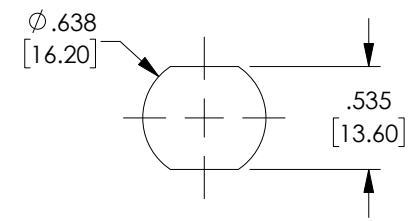

RECOMMEND MOUNT HOLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] ≤60 [1524] = +2 [51] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± 2 [50.8] .XX = ± .12 [3.05] .XXX = ± .005 [0.13]	SIGNATURE	DATE	MILESTEK CORPORATION 301 LEORA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047
	DRAWN BY: DFRISIELLO	05/30/2019	
	CHECKED BY: DGUTTADAUR	05/31/2019	
	APPROVED BY: DGUTTADAUR	05/31/2019	
CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 4Z977		TITLE C6A M12X M/F PN TPE 26 TEL
	SCALE: NTS	DRAWING NUMBER: TAA00012	SHEET 1 OF 1 REV. A