


8 7 6 5 4 3 2 1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

TMK00008	REVISIONS			
	REV	DESCRIPTION	DATE	APPROVED
A	REV A	DRAWING RELEASED	06/22/2018	BPUCHASKI

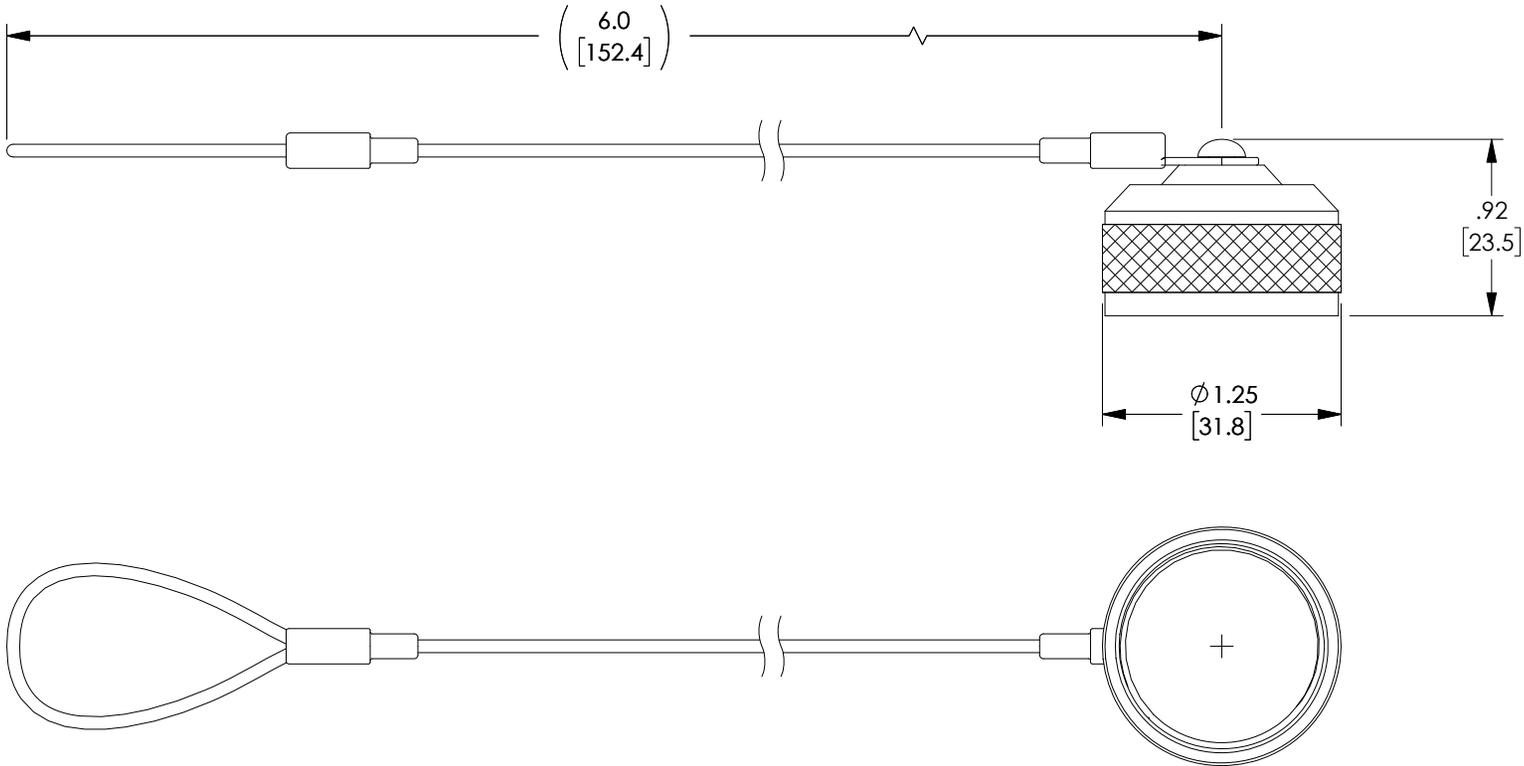

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. MATERIALS AND FINISH:  
EXTERNAL PARTS: ALUMINUM, ANODIZED (BLACK)  
MISCELLANEOUS HARDWARE: STAINLESS STEEL  
SEAL: SILICONE / NITRILE  
LANYARD: STAINLESS STEEL (NYLON COATED)
3. USED WITH IN-LINE STYLE RECEPTACLES
4. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

**NON CONTROLLED DRAWING IF PRINTED**

CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	DRAWN BY: BPUCHASKI	06/22/2018
	ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	CHECKED BY: DFRISIELLO	06/22/2018
DASH	NEXT ASSY	USED ON	APPROVED ENGINEERING: D.GUITADAURO
			APPROVED MANUFACTURING:
	CUSTOMER REFERENCE DOCUMENT:	CUSTOMER APPROVAL	TITLE DCAP + LNYRD INLINE RECP ANOD
	APPLICATION	CAGE CODE: 42977	SIZE <b>A</b>
			DRAWING NUMBER: TMK00008
			SCALE: NTS
			SHEET 1 OF 1

8 7 6 5 4 3 2 1