



REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/18	D.FRIBELLO




"P1"  
USB 3.0 SERIES "A" PLUG  
CONTACTS 30µ GOLD

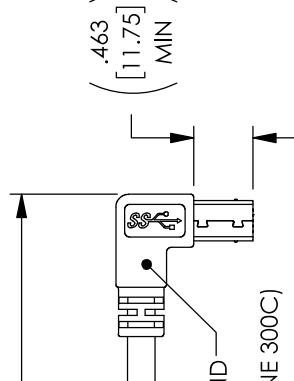

UL STYLE 20276,  
(2) TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE,  
(1) UNSHIELDED TWISTED PAIR, 30AWG,  
(2) CONDUCTORS, 24AWG,  
OVERALL ALUMINUM/MYLAR AND BRAIDED SHIELD,  
JACKET: PVC, BLUE (PANTONE 300C)  
(NOM DIA. .217" [5.5], MIN BEND RAD 2.17" [55])

PART NUMBER	LENGTH METERS [FEET]
MUS3A00028-03M	0.3 [.98]
MUS3A00028-05M	0.5 [1.64]
MUS3A00028-1M	1.0 [3.28]
MUS3A00028-2M	2.0 [6.56]
MUS3A00028-3M	3.0 [9.84]

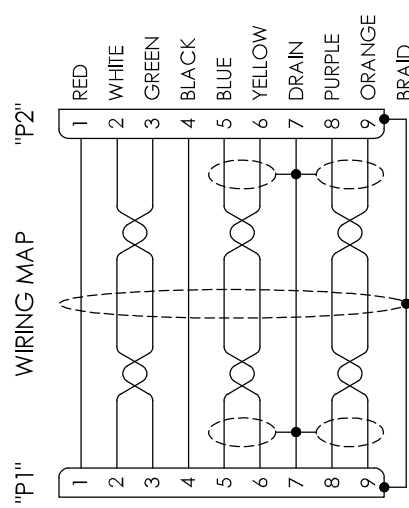

# NON CONTROLLED DRAWING IF PRINTED

SIGNATURE		DATE	MILESTEK CORPORATION	
DESIGNED BY: D.FRIBELLO	CHECKED BY: E.LAMOTT	5/8/18	301 ROCKVALE DRIVE, 100	ROCKVALE, IL 60443
APPROVED BY: B.C.GATES	APPROVED BY: B.C.GATES	5/9/18	PHONE: (940) 484-9400	FAX: (940) 364-0487
APPROVED MANUFACTURING:		TITLE: USB 3.0 STR A/B 90 RA L CABLE		
CUSTOMER APPROVAL:		SHEET: A		
CUSTOMER REFERENCE DOCUMENT:		DRAWING NUMBER: MUS3A00028		
DASH: NEXT ASSY USED ON:		SCALE: NTS		
APPLICATION:		SHEET 1 OF 1		

## NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

## REGULATORY COMPLIANCE:

CE2011/65/EU(ROHS DIRECTIVE)

PROPRIETARY NOTICE  
This document discloses confidential subject matter in which Milettek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or grants any right, title, or interest in the invention or any part thereof, or any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with Milettek Corporation and its subsidiaries.