

8

7

6

5

4

3

2

1

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/12/17	J.YOU

2X #4-40 UNC-2A THUMBSCREW

2X ABS CAP BLACK

LENGTH

MOLDED HOOD LSZH, BLACK

2X ENCAPSULATED FERRITE BEAD MOLDED LSZH, COLOR: BLACK

2X .87±.20 [22±5.1]

2X #4-40 UNC-2A METAL THUMBSCREW



"P1"
MALE DVI-D
SINGLE LINK
RIGHT ANGLE
CONNECTOR

U.L. STYLE 21100
(4) 30AWG INDIVIDUALLY SHIELDED TWISTED PAIRS,
(5) 28AWG CONDUCTORS, OVERALL ALUMINIZED
POLYESTER FILM SHIELD PLUS TINNED COPPER BRAID SHIELD,
OUTER JACKET: LOW SMOKE ZERO HALOGEN, BLACK.

MOLDED HOOD LSZH, BLACK

PIN 1

"P2"
MALE DVI-D
SINGLE LINK

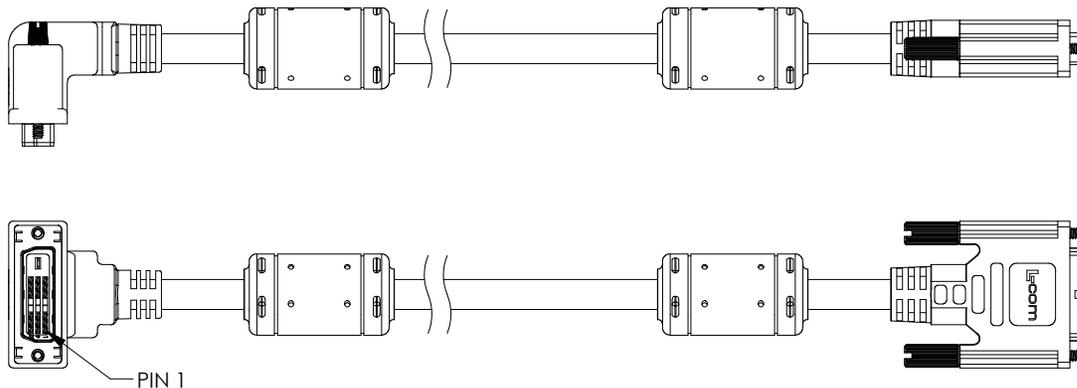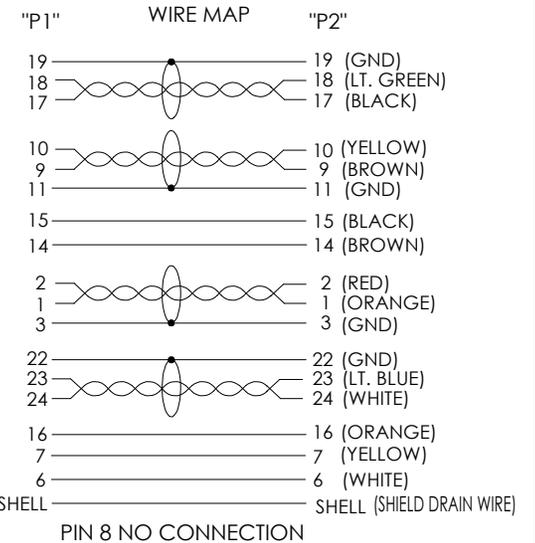

PART NUMBER	LENGTH	
	FEET	METERS
MDA00040-1F	1.0	[.30]
MDA00040-3F	3.0	[.91]
MDA00040-5F	5.0	[1.52]
MDA00040-10F	10.0	[3.05]
MDA00040-15F	15.0	[4.57]

NOTES:

1. CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY
2. CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			SIGNATURE	DATE	MilesTek	
			DRAWN BY: J.YOU	06/12/17	MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866.524.1553 FAX: 940.591.7086	
			CHECKED BY: B.GATES	06/12/17	TITLE CBL DVI-D SL RA	
			APPROVED ENGINEERING: S.PAN	06/12/17	DRAWING NUMBER: MDA00040	
			APPROVED MANUFACTURING:		SCALE: NTS	
			CUSTOMER APPROVAL		SHEET 1 OF 1	
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:		CAGE CODE: 42977	
APPLICATION						

8

7

6

5

4

3

2

1