


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

PART NUMBER	LENGTH	
	FEET	METERS
MDA00048-1F	1.0	[.31]
MDA00048-3F	3.0	[.91]
MDA00048-5F	5.0	[1.52]
MDA00048-10F	10.0	[3.05]


FEMALE DVI-I
DUAL LINK
CONNECTOR
30μ" GOLD
PLATED
CONTACTS



"J1"

WIRING MAP

"P1"

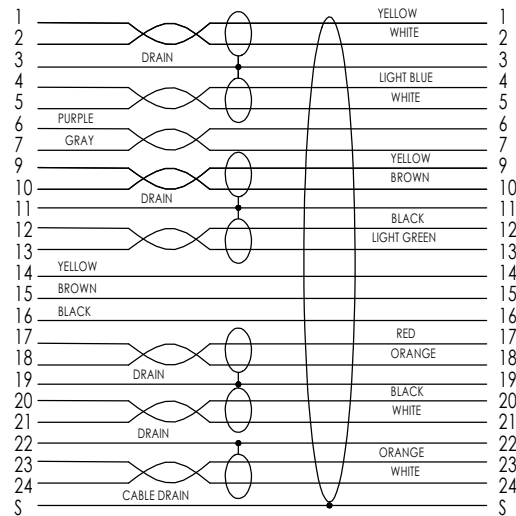


PIN 8: NO CONNECTION

NOTES:



1. CABLES TO BE TESTED FOR CONTINUITY
2. CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPEC. PS-0054.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

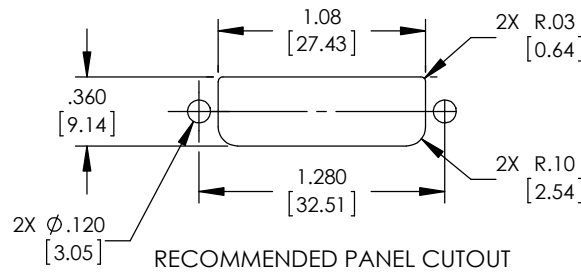


RECOMMENDED PANEL CUTOUT

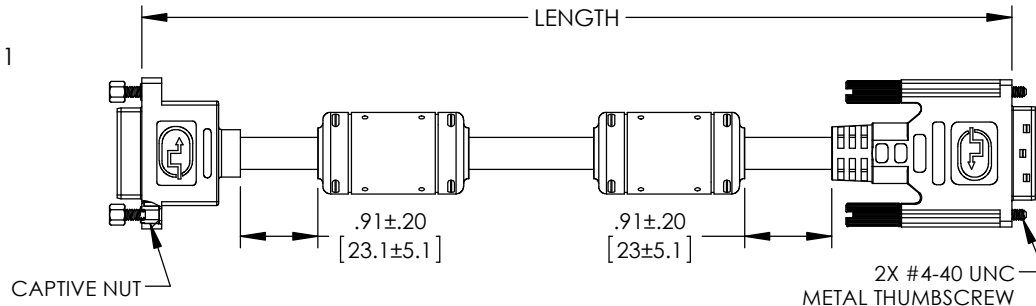


UL STYLE 20276,
(7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
SHIELDING(BRAIDED): 36AWG TINNED COPPER
SHIELDING: ALUMINUM/POLYESTER
OUTER JACKET: PVC; GRAY COLOR (PANTONE 424C)
(NOM DIA. .335" [8.5], MIN BEND RAD 3.35" [85])

MOLDED PVC HOOD
GRAY (PANTONE 424C)

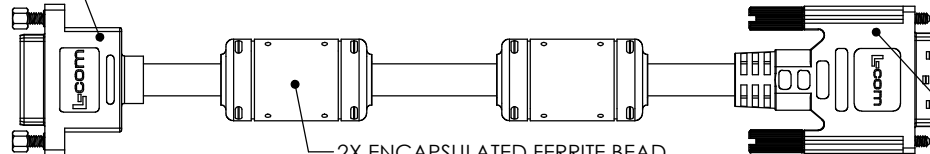


2X ENCAPSULATED FERRITE BEAD,
PVC, GRAY (PANTONE 424C)

MOLDED PVC HOOD WITH
INTERNAL METAL
BACKSHELL SHIELD,
GRAY (PANTONE 424C)

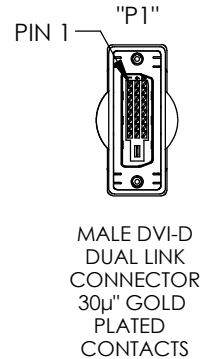

MALE DVI-D
DUAL LINK
CONNECTOR
30μ" GOLD
PLATED
CONTACTS

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.02 [51] .XX = ±.005 [13]	SIGNATURE	DATE	 MILESTEK CORPORATION 1506 INTERSTATE 35 WEST DENTON, TX 76207 PHONE: 866-524-1153 FAX: 940-591-7086	TITLE CA DVI-D PNL MNT DUAL LNK
				DRAWN BY: J.YOU	06/12/17		
				CHECKED BY: B.GATES	06/12/17		
				APPROVED ENGINEERING: S.PAN	06/12/17		
				APPROVED MANUFACTURING:			
				CUSTOMER APPROVAL			
DASH	NEXT ASSY	USED ON		CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 42977	SIZE A	DRAWING NUMBER: MDA00048
APPLICATION						SCALE: NTS	SHEET 1 OF 1

SUPPLIED WITH (4) #4-40
JACKSCREWS FOR PANEL MOUNT
2X H = .160
2X H = .191