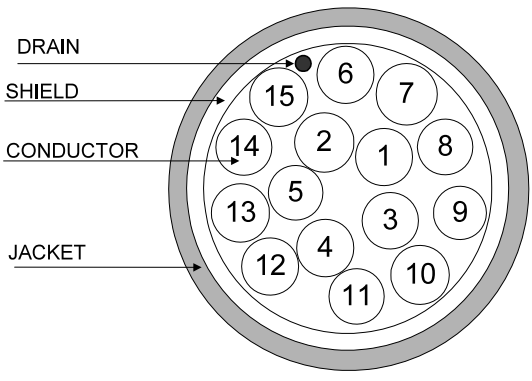


**CSPL15 Bulk Cable Specification**

<p>Cross-sectional View</p> 		<p>Color Code</p> <ol style="list-style-type: none"> <li>1. Black</li> <li>2. White</li> <li>3. Red</li> <li>4. Green</li> <li>5. Brown</li> <li>6. Blue</li> <li>7. Orange</li> <li>8. Yellow</li> <li>9. Purple</li> <li>10. Gray</li> <li>11. Pink</li> <li>12. Tan</li> <li>13. Red-Black</li> <li>14. White-Black</li> <li>15. Green-Black</li> </ol>
ITEM		DESCRIPTION
Conductor	No. of Conductors	15
	Material	Tinned Copper
	Construction	24 AWG stranded (7 x 32)
Insulation	Material	Halar E-CTFE
	Nominal Thickness	.006"
	Nominal Diameter	.034" - .038"
Shielding	Material	Aluminum / Mylar
	Coverage	100%
	Drain wire	24 AWG stranded (7 x 32) tinned copper
Braiding	Material	None
	Coverage	N/A
Jacket	Material	Halar E-CTFE
	Nominal Thickness	.010"
	Nominal Diameter	.193"
	Color	Natural
Marking: Exxxxx TYPE CL2P-E130356 TYPE CMP 24AWG (UL), C(UL) 150C		
PROPERTIES		
Temperature	-40°C to 150°C	
Voltage	UL 300V Power Ltd.	