

PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

MDA00032	REVISIONS			
	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	06/12/17	J.YOU
A				

2X 4-40 UNC-2A METAL THUMBSCREW

LENGTH

MOLDED PVC HOOD, COLOR: BLACK

MOLDED PVC HOOD, COLOR: BLACK

"P1"

PIN 1

2X MALE DVI-D DUAL LINK CONNECTOR

PIN 1

2X 4-40 UNC-2A THUMBSCREW

"P2"


UL STYLE 20276,
(7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
SHIELDING(BRAIDED): 36AWG TINNED COPPER
SHIELDING: ALUMINUM/POLYESTER
OUTER JACKET: PVC; BLACK

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH SPECIFICATION PS-0054.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

MODEL NUMBER	LENGTH	
	FEET	METERS
MDA00032-1F	1.0	0.3
MDA00032-3F	3.0	[0.91]
MDA00032-5F	5.0	[1.52]
MDA00032-10F	10.0	[3.05]
MDA00032-15F	15.0	[4.57]

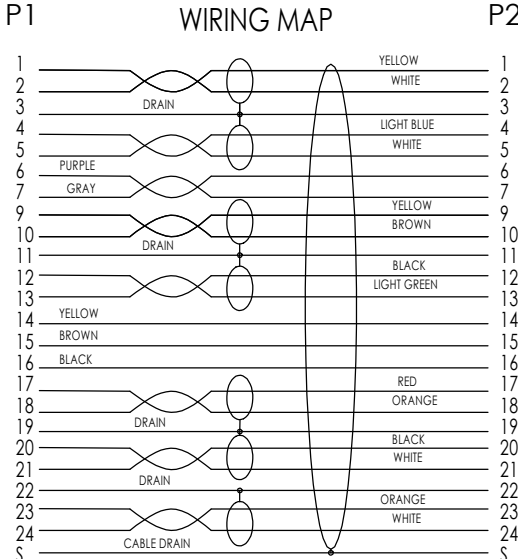

PIN 8: NO CONNECTION

NON CONTROLLED DRAWING IF PRINTED

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY				
			SIGNATURE	DATE	MilesTek Military Aerospace Communications Industrial		
			DRAWN BY: J.YOU	06/12/17			
			CHECKED BY: B.GATES	06/12/17	TITLE CA-DVI DL M/M RA LFT EXIT		
			APPROVED ENGINEERING: S.PAN	06/12/17			
			APPROVED MANUFACTURING:		DRAWING NUMBER: MDA00032		
			CUSTOMER APPROVAL				
DASH	NEXT ASSY	USED ON	CAGE CODE: 42977		SIZE A	SCALE: NTS	SHEET 1 OF 1
APPLICATION							