


PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/28/17	G.HUAN
B	ECN 8899: REVISE NOTE 1 TO NOTE 2, DESCRIPTIONS, TITLE	8/31/17	D.FRISIELLO

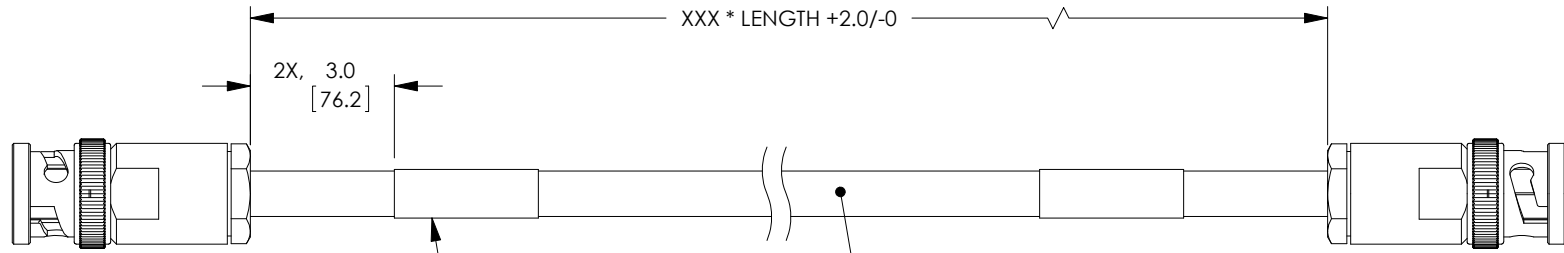

△ 2X, TRB 3-SLOT PLUG

△ LABEL INFORMATION
 MSA00352-XXXN
 4Z977
 DATE CODE
 (SEE NOTE 2)

△ 322001, 50 OHM TRIAXIAL CABLE
 JACKET: HIGH TEMPERATURE FLUOROPOLYMER, CLEAR
 TEMPERATURE RANGE: -55° TO +200°C
 NOM. DIA: .236" [5.99]



LENGTH CODE CHART		
CABLE # & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART # USED
MSA00352-XXN	WHERE XXX = LENGTH IN INCHES	MSA00352-12N (12.0 INCHES)

- NOTES:**
- *XXX = LENGTH IN INCHES
 - CABLES 48" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 48" HAVE 2 LABELS, ONE AT EACH END 3.0" FROM THE BACK OF THE CONNECTOR.
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

NON CONTROLLED DRAWING IF PRINTED △

AS9100C CERTIFIED			CAD SYSTEM DRAWING - DO NOT REVISE MANUALLY			
			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	SIGNATURE	DATE	 <small>Military Aerospace Communications Industrial</small>
			OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = ±1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	G.HUAN	06/27/17	
			ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY:		TITLE CA HT TRIAX P-P
				M.HEARN	06/28/17	
				APPROVED ENGINEERING:		SIZE A
				M.HEARN	06/28/17	
				APPROVED MANUFACTURING:		DRAWING NUMBER: MSA00352-XXXN
DASH	NEXT ASSY	USED ON	CUSTOMER REFERENCE DOCUMENT:	CUSTOMER APPROVAL		SCALE: NTS
						SHEET 1 OF 1
			APPLICATION	CAGE CODE: 4Z977		