



PROPRIETARY NOTICE

This document discloses confidential subject matter in which MilesTek Corporation and its subsidiaries have proprietary rights. Neither receipt nor possession thereof confers or transfers any right to reproduce or disclose the document, any part thereof, any information contained therein, or any physical article or device, or to practice any method or process, except by written permission from, or written agreement with MilesTek Corporation and its subsidiaries.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	11/02/2018	BPUCHASKI

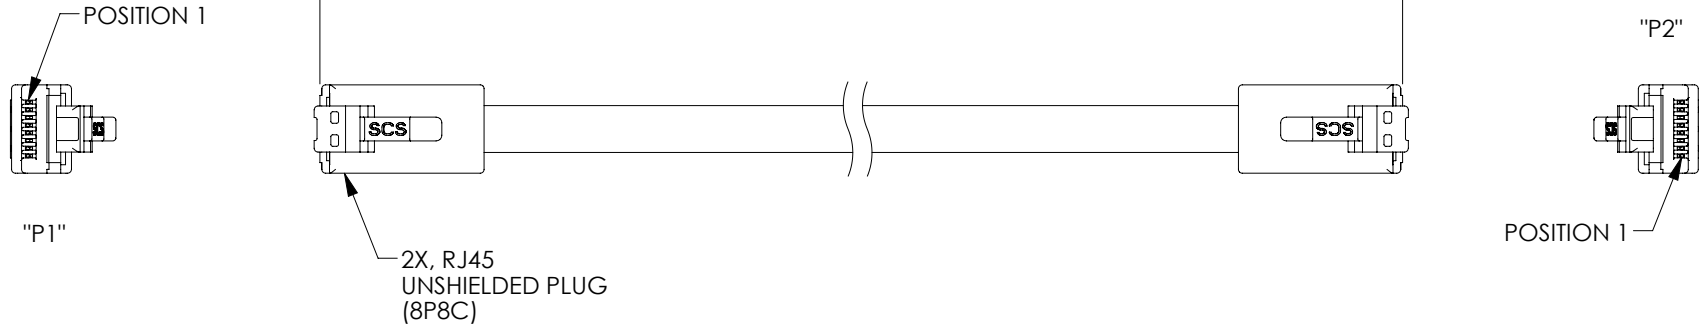

MODEL NUMBER	LENGTH	
	FEET	METERS
T6A00009-1F	1.0	.30
T6A00009-2F	2.0	.61
T6A00009-3F	3.0	.91
T6A00009-5F	5.0	1.52
T6A00009-7F	7.0	2.13
T6A00009-10F	10.0	3.05
T6A00009-15F	15.0	4.57
T6A00009-25F	25.0	7.62
T6A00009-30F	30.0	9.14
T6A00009-50F	50.0	15.24
T6A00009-75F	75.0	22.86
T6A00009-100F	100.0	30.48

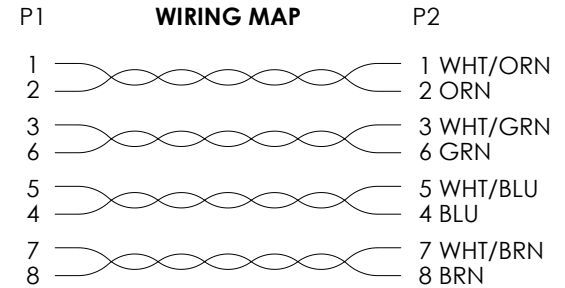

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE.

FINISH:
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:
 CAT 6, UNSHIELDED FOUR TWISTED PAIRS MODULAR CORD,
 23 AWG SOLID BARE COPPER CONDUCTORS
 OUTER JACKET: UL444, LOW SMOKE ZERO HALOGEN, BLUE

MISCELLANEOUS:
 LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
 OPERATING TEMPERATURE RANGE: -20°C TO +70°C.
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH MILESTEK SPECIFICATION PS-0054.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	SIGNATURE	DATE	MILESTEK CORPORATION 301 LEORA LANE, SUITE 100 LEWISVILLE, TX 75056 PHONE: (940) 484-9400 FAX: (940) 566-1047	
	DRAWN BY: BPUCHASKI	11/02/2018		TITLE
	CHECKED BY: DFRISIELLO	11/02/2018		RJ45 C6 UTP 23SLD LSZH BLU
	APPROVED BY: DGUITADAUR	11/02/2018		SIZE
CUSTOMER REFERENCE DOCUMENT:	CAGE CODE: 4Z977		DRAWING NUMBER: A T6A00009 A	
		SCALE: NTS	SHEET 1 OF 1	